

# XESD2FH5VC Transient Voltage Suppressors

## Features

- Low clamping voltage
- Complies with IEC 61000-4-2 standards:

Air discharge:  $\pm 20\text{kV}$

Contact discharge:  $\pm 20\text{kV}$

- RoHS Compliant



SOD882

## Ordering information

Device	Package	Shipping
XESD2FH5VC	SOD882	10000/Tape&Reel


## Absolute Maximum Ratings ( $T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 $\mu\text{s}$ )	Ppk	300	W
Peak Pulse Current (8/20 $\mu\text{s}$ )	I <sub>PP</sub>	20	A
Operating Temperature Range	T <sub>J</sub>	-55 to +125	$^\circ\text{C}$
Storage Temperature Range	T <sub>stg</sub>	-55 to +150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS**

(T<sub>A</sub> = 25°C unless otherwise noted)


Symbol	Parameter
I <sub>PP</sub>	Maximum Reverse Peak Pulse Current
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
V <sub>RWM</sub>	Working Peak Reverse Voltage
I <sub>R</sub>	Maximum Reverse Leakage Current @ V <sub>RWM</sub>
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
I <sub>T</sub>	Test Current
P <sub>pk</sub>	Peak Power Dissipation
C	Capacitance @ V <sub>R</sub> = 0 and f = 1.0 MHz

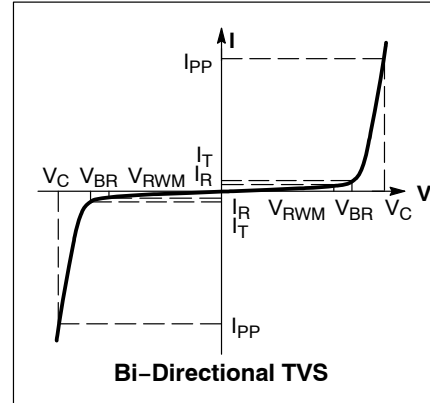


**ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25°C unless otherwise noted)

Device	Device Marking	V <sub>RWM</sub> (V)	I <sub>R</sub> (nA) @ V <sub>RWM</sub>	V <sub>BR</sub> (V) @ I <sub>T</sub> = 1mA (Note 1)		C (pF)	V <sub>C</sub> (V) @ I <sub>PP</sub> = 1 A (Note 2)	I <sub>PP</sub> (A) t <sub>r</sub> = 8/20µs	P <sub>PP</sub> (W)	V <sub>C</sub>
		Max	Max	Min	Max		Typ	Max	Max	Max
XESD2FH5A9	A9	5.0	100	6	9	80	9.5	20	300	Figures 1 and 2 See Below

1. V<sub>BR</sub> is measured with a pulse test current I<sub>T</sub> at an ambient temperature of 25°C.
2. Surge current waveform per Figure 5.
3. For test procedure see Figures 3 and 4.

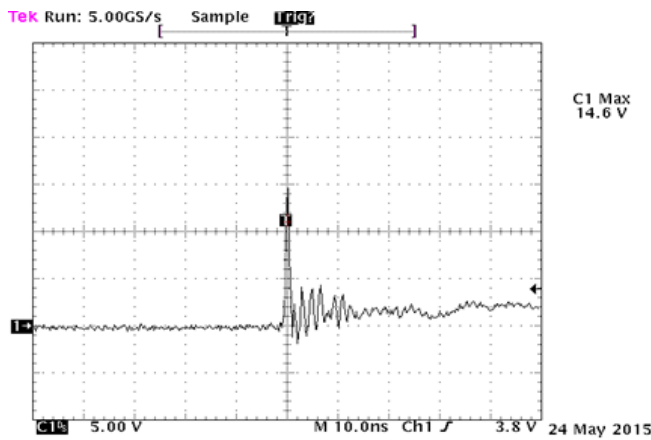

**Figure 1. ESD Clamping Voltage Screenshot Positive 8 kV Contact per IEC61000-4-2**

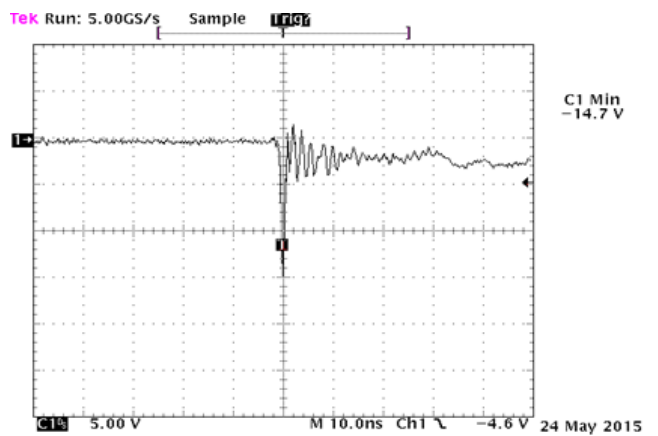

**Figure 2. ESD Clamping Voltage Screenshot Negative 8 kV Contact per IEC61000-4-2**

IEC 61000-4-2 Spec.

Level	Test Voltage (kV)	First Peak Current (A)	Current at 30 ns (A)	Current at 60 ns (A)
1	2	7.5	4	2
2	4	15	8	4
3	6	22.5	12	6
4	8	30	16	8

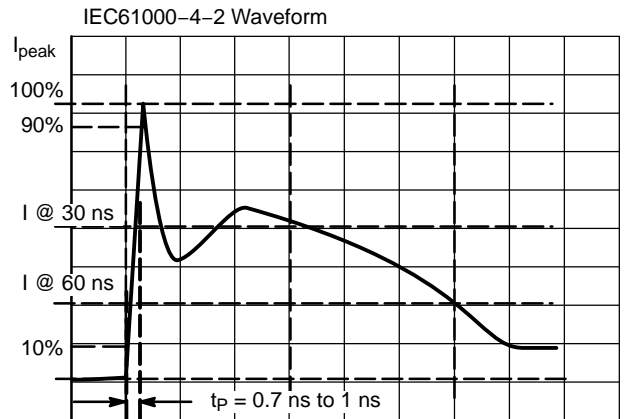


Figure 3. IEC61000-4-2 Spec

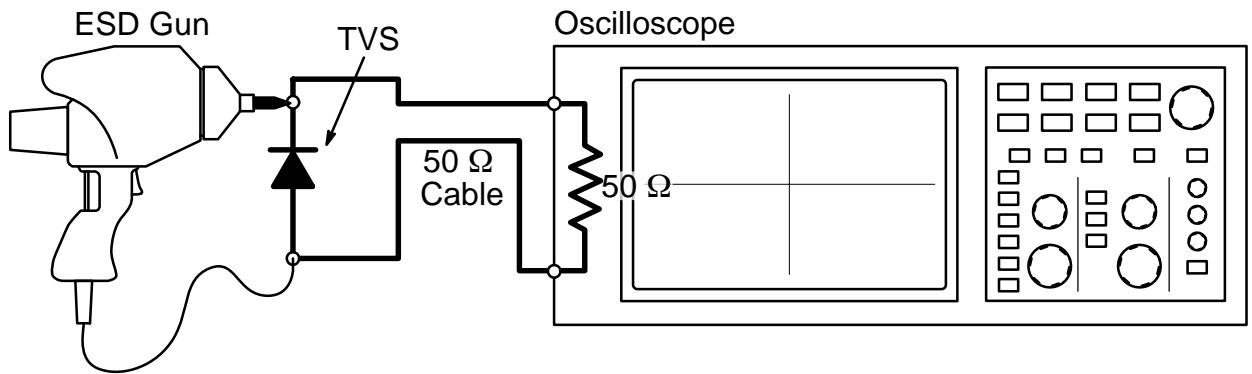


Figure 4. Diagram of ESD Test Setup


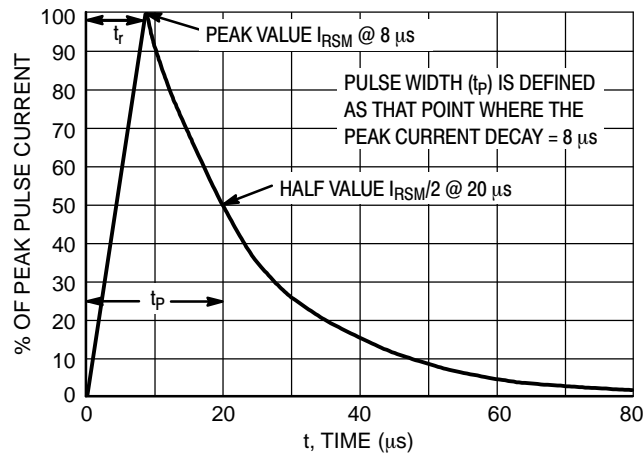



Figure 5. 8 X 20 μs Pulse Waveform

**OUTLINE AND DIMENSIONS**

**SOD882**

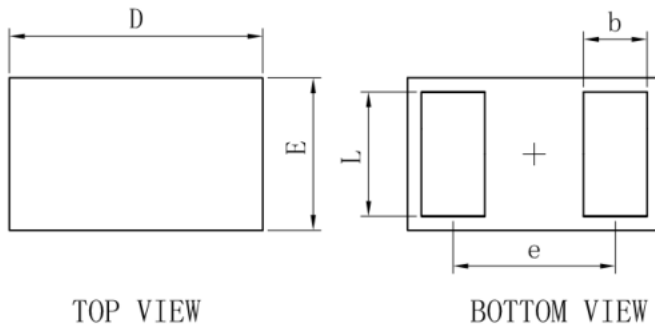


SOD882			
Dim	Min	Typ	Max
D	0.95	1.00	1.05
E	0.55	0.60	0.65
e	-	0.64	-
L	0.44	0.49	0.54
b	0.20	0.25	0.30
A	0.43	0.48	0.53
A1	0	-	0.05
A3	0.127REF.		
All Dimensions in mm			

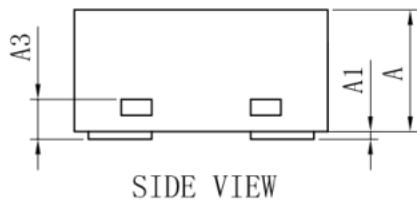

**SOLDERING FOOTPRINT**

**SOD882**

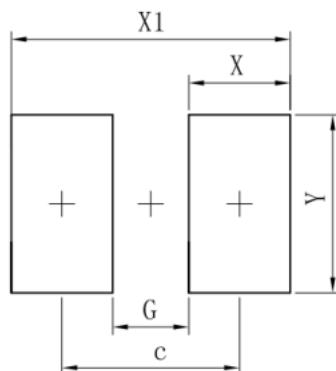

Dimensions	(mm)
c	0.70
G	0.30
X	0.40
X1	1.10
Y	0.70