



1. Dimensions:

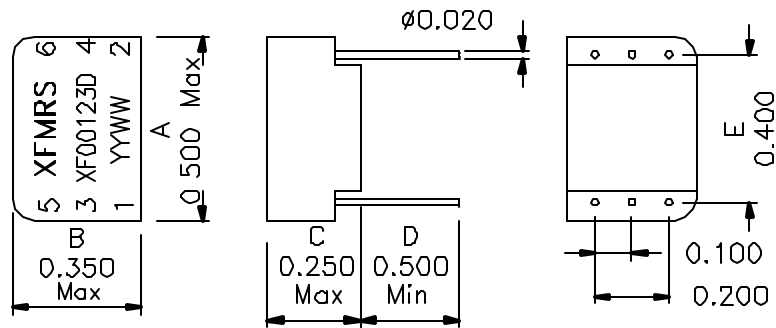

2. Schematic:

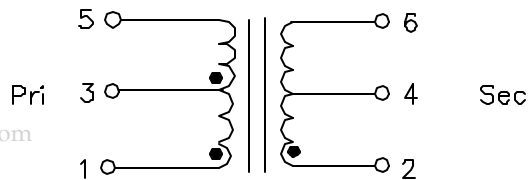

www.DataSheet4U.com

3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms (PRI/SEC)

Turns Ratio: 1CT:2CT ±5% (PRI:SEC)

PRI OCL: 1.2mH Minimum @100KHz 50mV

PRI LL: 0.50uH Maximum @100KHz 50mV (SEC Shorted)

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PRI DCR: 0.70 Ohms Maximum

SEC DCR: 1.50 Ohms Maximum

Notes:

- Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C, UL file E151556
- Operating Temperature Range, -40°C to +85°C

DOC. REV A/1

| | | | |
|----------------------|----------------------------------------------------|---------------|----------------------------------|
| XFMRS Inc | Title: TRANSFORMERS | | |
| | UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 | P/N: XF00123D | REV. A |
| Dimensions in Inch | DWN. | 廖玉坤 | Jan-22-02 |
| SCALE 2:1 SHT 1 OF 1 | CHK. | 李清儿 | Jan-22-02 |
| | APP. | Bw | www.DataSheet4U.com Jan-22-02 |