



### 1. Dimensions:

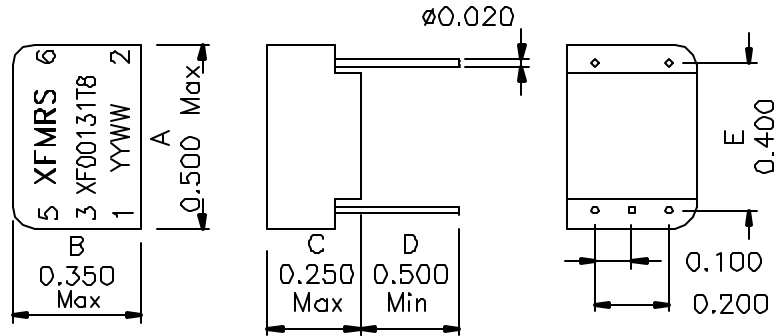

### 2. Schematic:

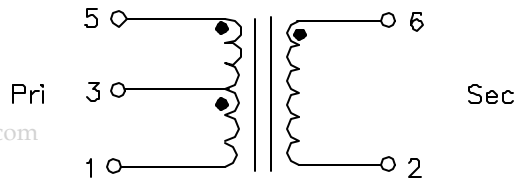

www.DataSheet4U.com

### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms (PRI/SEC)

Turns Ratio: 2CT:1 ±5% (PRI:SEC)

PRI OCL: 1.2mH Minimum @100KHz 50mV

PRI LL: 0.50uH Maximum @100KHz 50mV (SEC Shorted)

Cw/w: 40pF Maximum @100KHz 50mV (PRI/SEC)

DCR: P5-1 0.70 Ohms Maximum

DCR: P6-2 1.10 Ohms Maximum

Remove PIN#4

#### Note.

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

DOC. REV: A/1

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION

<b>XFMRs Inc</b> UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch	Title: T1/CEPT/DS1 MAGNETICS TRANSFORMERS		
	P/N: XF00131T8	REV. A	
	DWN.	廖玉坤	Apr-17-01
	CHK.	李清儿	Apr-17-01
SCALE 2:1 SHT 1 OF 1	APP.	BW	www.DataSheet4U.com Apr-17-01