




RoHS 2002/95/EC Compliant


Thermoelectric Cooler XLT2420

Performance Values

Hot Side Temperature (°C)	27°C	50°C
ΔT_{max} (°C-dry N ₂):	59	67
Q _{max} (watts):	52	57
I _{max} (amps):	5.6	5.6
V _{max} (vdc):	14.4	16.0
AC Resistance (ohms):	2.2	---

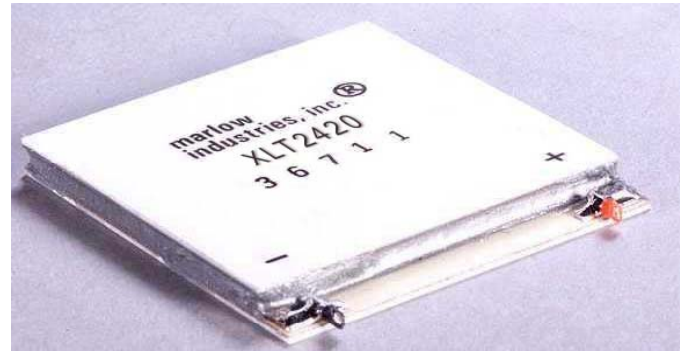

Mechanical Characteristics

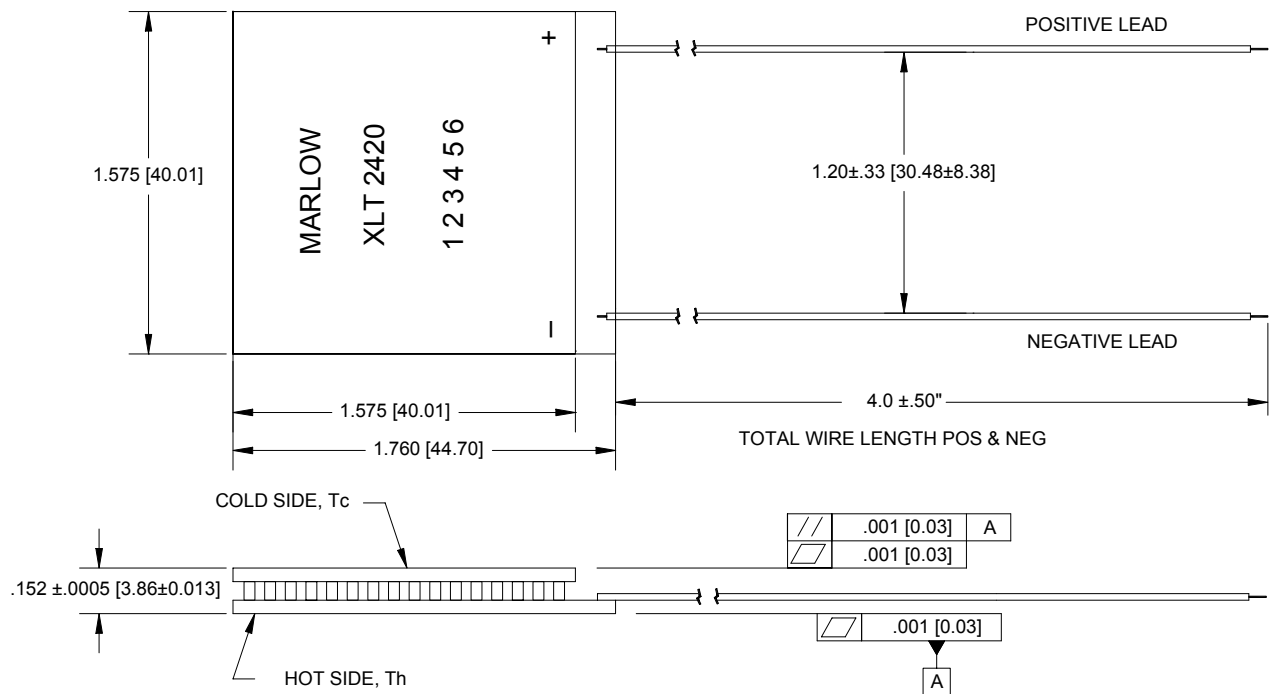

Ordering Options

Model Number	Description
XLT2420-00L	Lapped Model
XLT2420-01L	Lapped Model with Leadwires
XLT2420-00LS	Lapped and Sealed Model
XLT2420-01LS	Lapped and Sealed Model with Leadwires

Features

- **RoHS 2002/95/EC compliant**
- Specifically designed for thermal cycling applications
- Capable of rapid heating and cooling rates
- Proven High Reliability (Data available upon request)
- Rugged construction
- Porched configuration for enhanced leadwire strength
- Leadwires attached with 218°C solder
- Rated operating temperature of 130°C
- Height tolerance of ± 0.001 in. (± 0.03 mm) allows for multiple module applications
- Modules with matched AC Resistance available (Optional)




Performance Curves

Environment: One atmosphere dry nitrogen


Hot Side Temperature: 27°C

T_A = 27°C - Nitrogen (1 ATM)

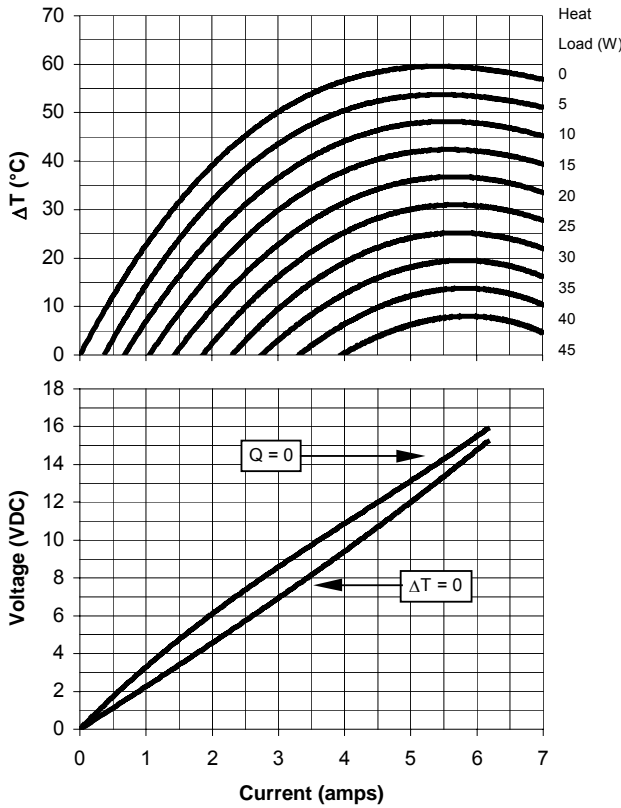

Hot Side Temperature 50°C

T_A = 50°C - Nitrogen (1 ATM)

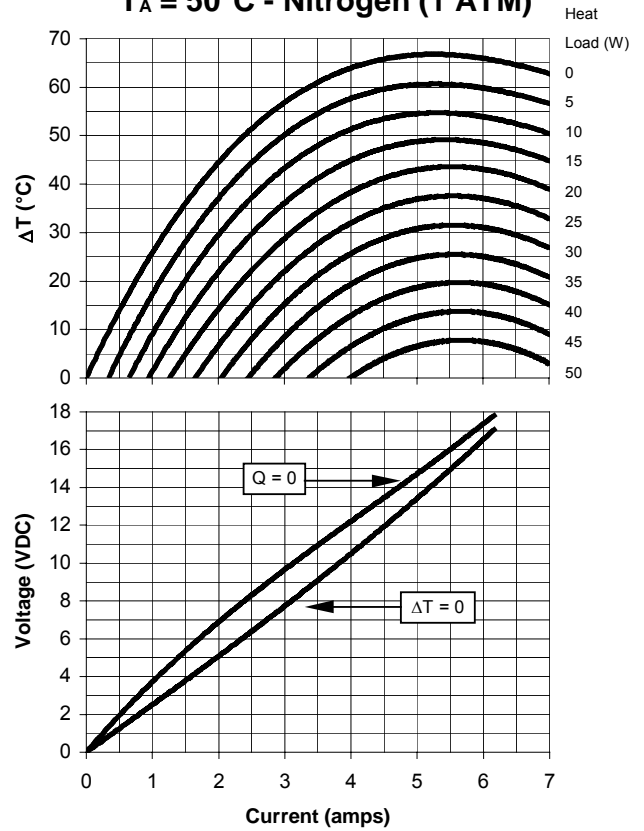

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

Installation

XLT coolers are typically mounted under compression using thermal grease or flexible graphite products. Consult Marlow Industries' Thermoelectric Installation Guide for more details. For additional information, please contact one of our application engineers for technical support.

Addresses

Marlow Industries, Inc.
10451 Vista Park Road
Dallas Texas 75238-1645
214-340-4900 (tel)
214-341-5212 (fax)
www.marlow.com

Marlow Industries Europe
Aberdeen House, South Road
Haywards Heath
West Sussex RH164NG UK
+44 (0)1444-443404 (tel)
+44 (0)1444-443334(fax)

Marlow Industries Japan
1-1-8-401
Uehara, Shibuya-ku
Tokyo, Japan 151-0064
+81 (3) 5454-5280 (tel)
+81 (3) 5454-5281(fax)