

XO3080 Series

1.8x8 inch, 3.3 & 5.0 Volt, HCMOS/Sinewave, TCXO

- All output types
- VCXO version available


Model	Frequency (MHz)	Temperature Range (°C)	Temperature Stability	Aging First Year	Output	Supply Voltage
XO3080	20	-30 to +70	±0.75 ppm	±1.0 ppm	Sine	5 V ±0.25 V
Options	10 to 125	See Table		Frequency Dependent	HCMOS	+3.3 V or +15 V

Additional Specifications

Aging over ten years	±3.0 ppm max
Current	
Sinewave	As low as 2 mA
HCMOS	As low as 4 mA
Frequency Adjust	
Method	External 10 k Pot/voltage
Range	±5 ppm
Sinewave	
Level	0 dBm or 2.0 V _{p-p}
Load	50 Ω or 1 k Ω//10 pF
HCMOS	
Duty Cycle	40/60
Load	2 Gates
Phase Noise @ 20 MHz	
10 Hz	-85 dBc/Hz
100 kHz	-115 dBc/Hz
1 kHz	-135 dBc/Hz
10 kHz	-145 dBc/Hz

Optional Temperature Range °(C)	±1	±0.75	±0.50	±0.25
+15 to +30	√	√	√	√
0 to +50	√	√	√	√
0 to +70	√	√	√	
-20 to +70	√	√	√	
-40 to +75	√	√		
-55 to +85	√			

This TCXO can be produced to these specifications, with extended temperature range and tighter stability being cost drivers.

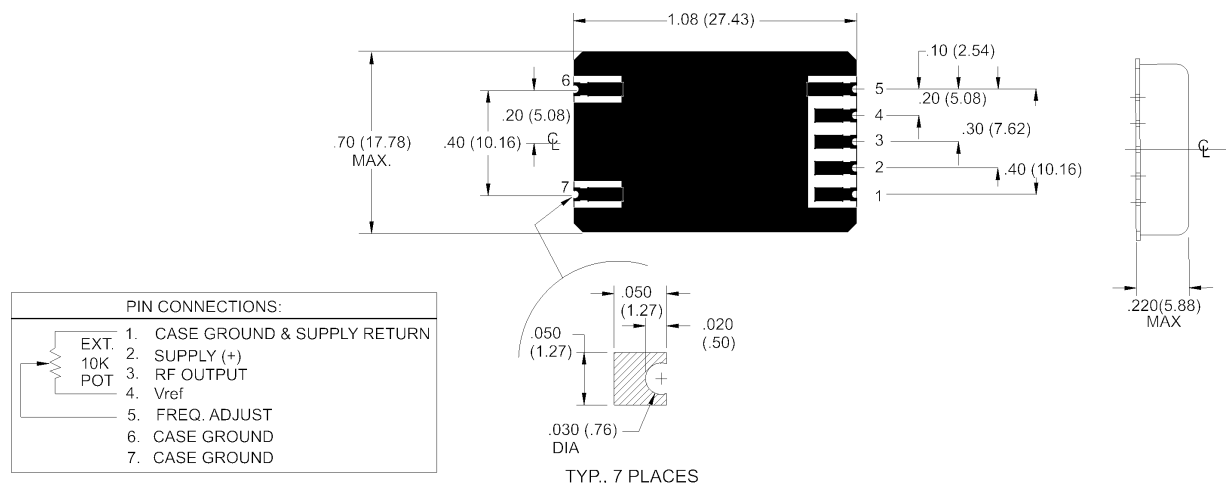

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see www.mtronpti.com for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.