



Model XO3285-XXX

Shock Hardened TCXO

Electrical Specifications

Nominal Frequency (F_0): 10MHz to 24MHz

Frequency Stability

Over Temperature, ± 1 ppm, maximum
Aging/year, ± 1 ppm, maximum

Frequency Adjustment

Method, external voltage, $0.5V_{DC}$ to $2.5V_{DC}$
Range, sufficient for 10 years aging
Slope, positive

Output (clipped sine)

Level (user selectable @ time of purchase)
1.0V_{P-P}, typical
1.2V_{P-P}, typical
1.5V_{P-P}, typical
Load (all output level options), $10K\Omega // 10pF$, $\pm 10\%$

Mass: 0.04oz (1.1 grams)

SSB Phase Noise (typical for a 10MHz model)

-80dBc/Hz @ 10Hz offset
-105dBc/Hz @ 100Hz offset
-135dBc/Hz @ 1kHz offset
-145dBc/Hz @ 10kHz offset

Short Term Stability: $\pm 5 \times 10^{-10}$, Tau=1 second

Power Supply (available options)

Voltage, $+3.3 V_{DC}$ and $+5.0V_{DC}$, $\pm 5\%$
Current Consumption, 3.0mA, maximum, no load



Environmental

Vibration, 10g peak, 10-2000Hz
Shock, 50kg, rise time 1msec, duration 7msec
Temperature Range
Operating, -30°C to $+75^\circ\text{C}$
Storage, -55°C to $+105^\circ\text{C}$


DIMENSIONS ARE IN INCHES (mm)

CONNECTIONS:

1. RF OUT
2. GROUND
3. V_{tune}
4. V_{cc}
5. DO NOT CONNECT
6. DO NOT CONNECT
7. DO NOT CONNECT
8. DO NOT CONNECT

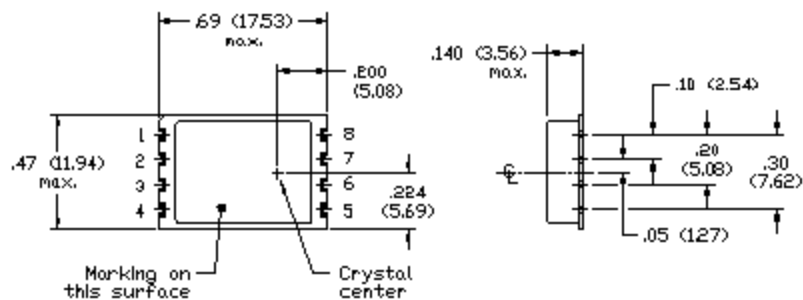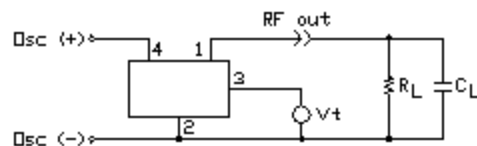

Recommended direction of flight

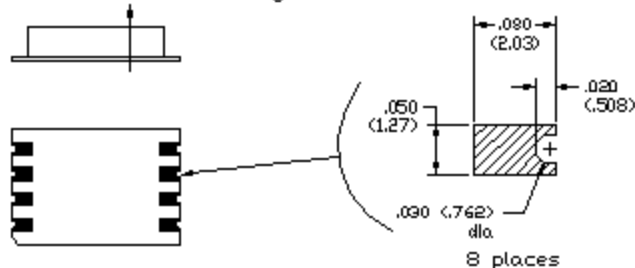

Revised: May 20, 2003 Preliminary Specifications subject to change without notice