

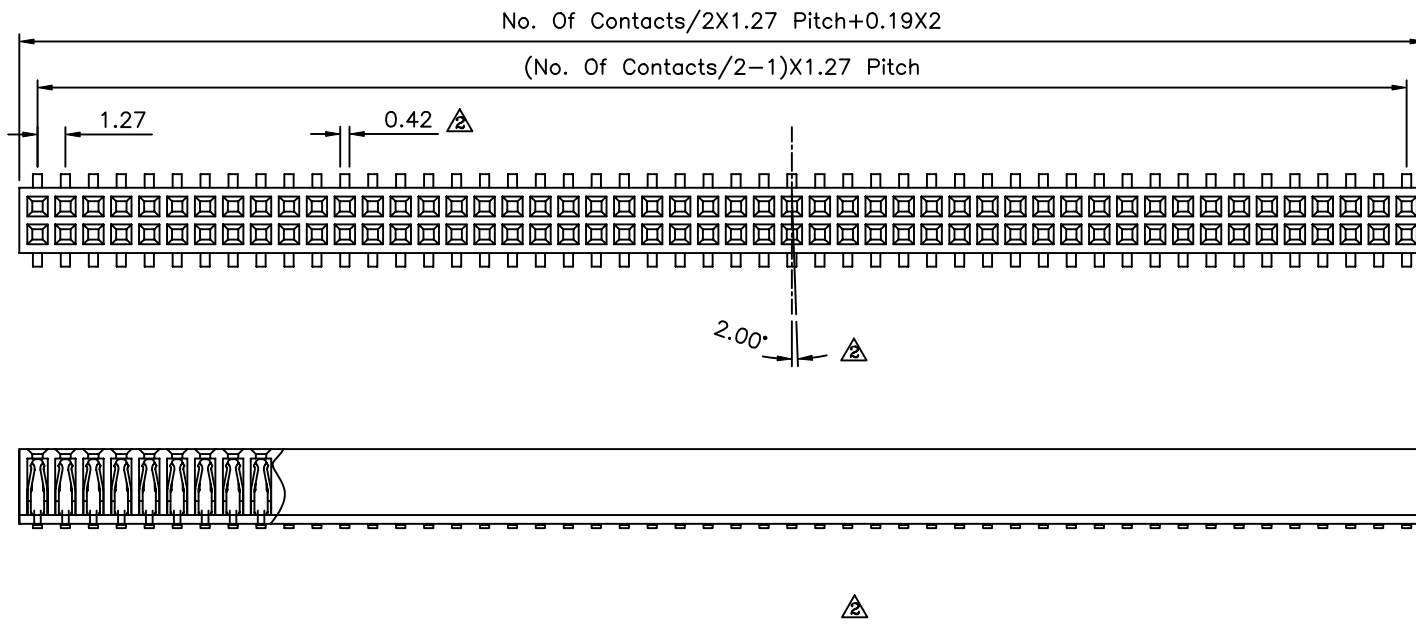


△ SPECIFICATION
 Current Rating:1 Amp
 Dielectric Withstanding:500V AC
 Insulation Resistance:5000 Megohms Min.
 Operation Temperature-40°C~+105°C
 Max. Processing Temperature:
 230° For 30~60 Seconds
 (260° For 10 Seconds)
 Housing:LCP UL94V-0,Black
 Contact:Phosphor Bronze,Gold Flash
 RoHS Compliant

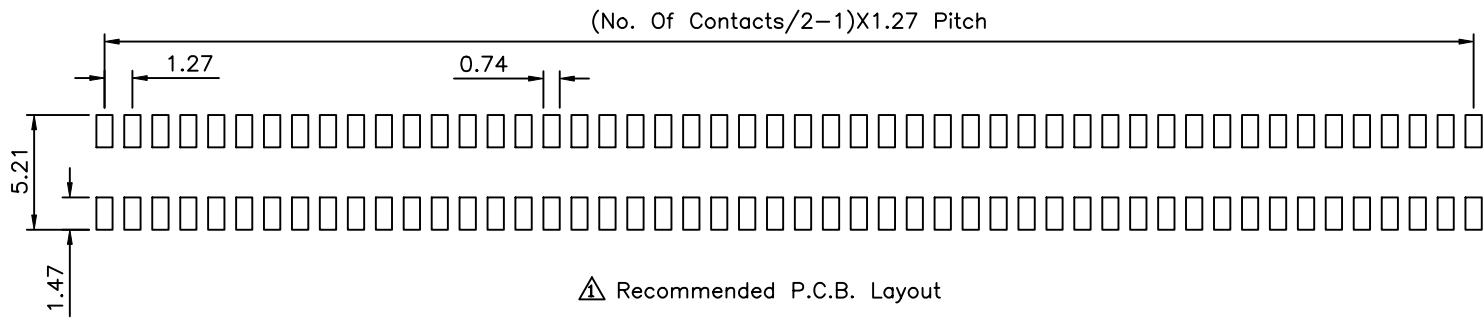

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.20 .X ±0.15 .XX ±0.10 .XXX ±0.05
PART No. YAVX36-2XXX-H		MEI		
DRAWING No. YAVX36-2XXX-H		HZF		
		QQJ		
SCALE	NONE	REV.	A2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	02/22/2010
△ A1		Modify PCB Layout	BRCKY	04/11/2006
△ A0		NEW RELEASE	BRCKY	04/06/2005

Free C:\asner\input\www.auk.com