


DATA SHEET

NETWORK CHIP RESISTORS

YC358 (10Pin/8R)

5%

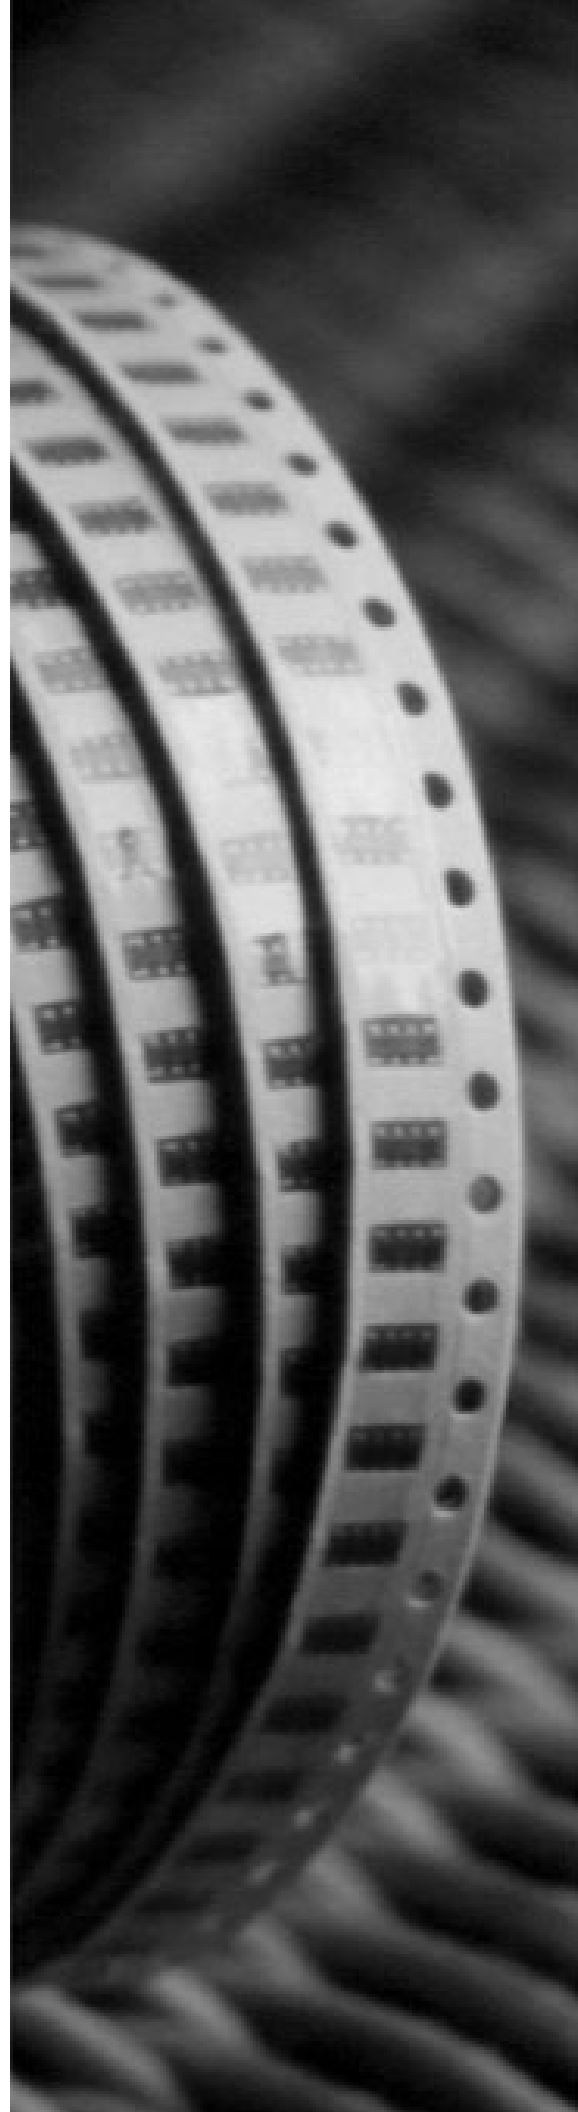

SCOPE

This specification describes YC358 series chip resistors made by thick film process.

ORDERING INFORMATION

Part number is identified by the series, size, tolerance, packing style, temperature coefficient, special type and resistance value.

YC358 **X** **X** **X** **X** **XX** **XXXX**
(1) (2) (3) (4) (5) (6)

(1) SCHEMATIC

L = L-type
T = T-type

(2) TOLERANCE

J = $\pm 5\%$

(3) PACKAGING TYPE

K = Embossed tapping reel

(4) TEMPERATURE CHARACTERISTIC OF RESISTANCE

G = $\pm 200\text{ppm}/^\circ\text{C}$
- = Base on spec

(5) SPECIAL TYPE

07 = 7 inch dia. Reel

(6) RESISTANCE VALUE:

560R, 5K6, 56K, 100K, 330K.

MARKING

YC358



Fig. 1 5% Marking, Value=56K

First two digits for significant figure and
3rd digit for number of zeros

Letter R: decimal place

DIMENSION

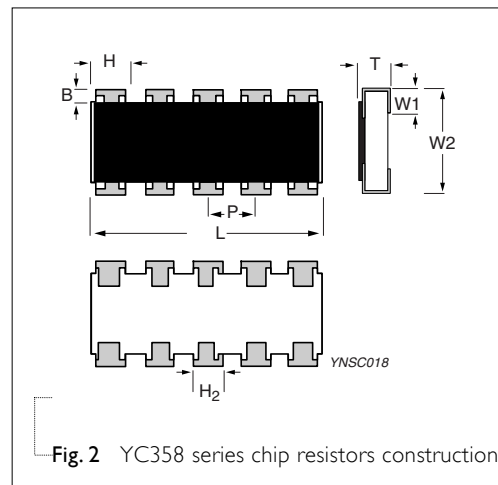



Fig. 2 YC358 series chip resistors construction

Table I

TYPE	YC358
B (mm)	0.5 \pm 0.15
H (mm)	1.1 \pm 0.15
P (mm)	1.27 \pm 0.05
L (mm)	6.4 \pm 0.2
H ₂ (mm)	0.9 \pm 0.15
T (mm)	0.6 \pm 0.1
W ₁ (mm)	0.5 \pm 0.15
W ₂ (mm)	3.2 \pm 0.2


SCHEMATIC

For dimension see Fig. 2 and Table I



L-type

R1=R2=R3=R4=R5=R6=R7=R8




T-type

R1=R2=R3=R4=R5=R6=R7=R8

Fig. 3 Equivalent circuit diagram

POWER RATING

**RATED POWER AT 70°C,
YC358=1/16W FOR ELEMENT**

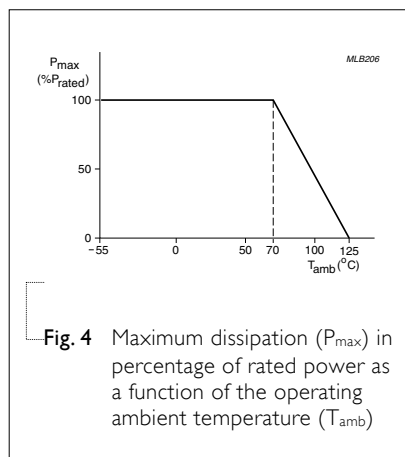**RATED VOLTAGE:**

The DC or AC (rms) continuous working voltage corresponding to the rated power is determined by the following formula:

$$V = \sqrt{P \times R}$$

Where

V=Continuous rated DC
or AC (rms) working voltage (V)

P=Rated power (W)

R=Resistance value (Ω)

ELECTRICAL CHARACTERISTICS

Table 2

CHARACTERISTICS	YC358 1/16W
Operating Temperature Range	-55°C to +125°C
Maximum Working Voltage	50V
Maximum Overload Voltage	100V
Dielectric Withstanding Voltage	100V
Number of Resistors	8
Resistance Range	10 Ω to 330K Ω
Temperature Coefficient	± 200 ppm/°C

TAPING REEL

Table 3

DIMENSION	YC358
Tape Width	12mm
ØA (mm)	180+0/-3
ØB (mm)	60+1/-0
ØC (mm)	13.0±0.2
ØD (mm)	21±0.8
W (mm)	13.0±0.3
T (mm)	15.4±1

For dimension see Table 3

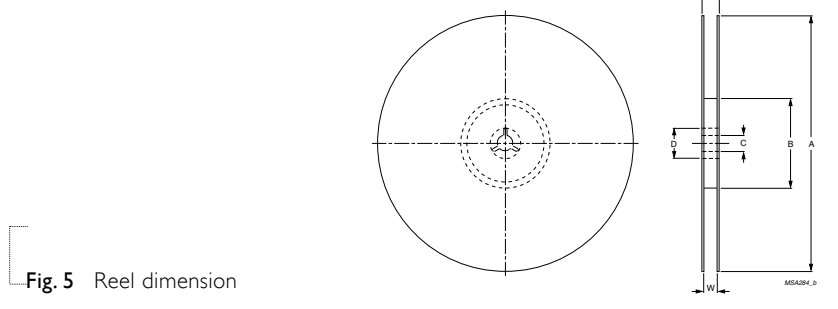


Fig. 5 Reel dimension

PAPER TAPE SPECIFICATION

Table 4

DIMENSION	YC358
A (mm)	3.5±0.2
B (mm)	6.7±0.2
W (mm)	12±0.3
E (mm)	1.75±0.1
F (mm)	5.5±0.05
P ₀ (mm)	4.0±0.1
P ₁ (mm)	4.0±0.1
P ₂ (mm)	2.0±0.05
ØD ₀ (mm)	1.5±0.1
T (mm)	1.0±0.1

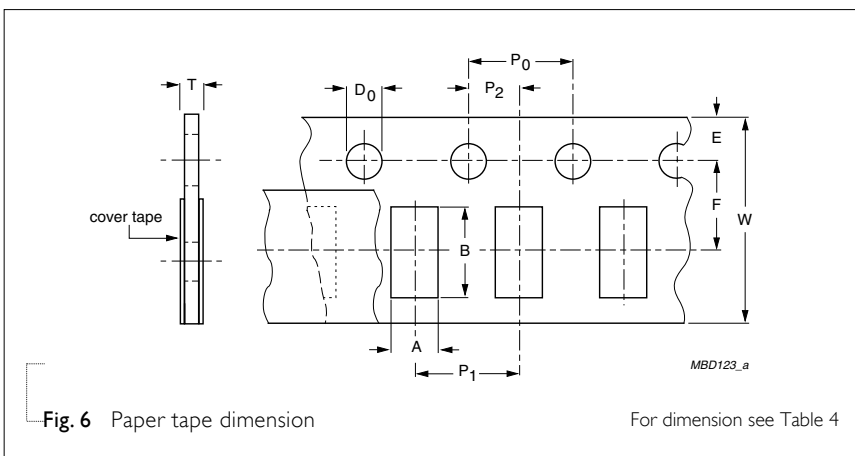


Fig. 6 Paper tape dimension

For dimension see Table 4

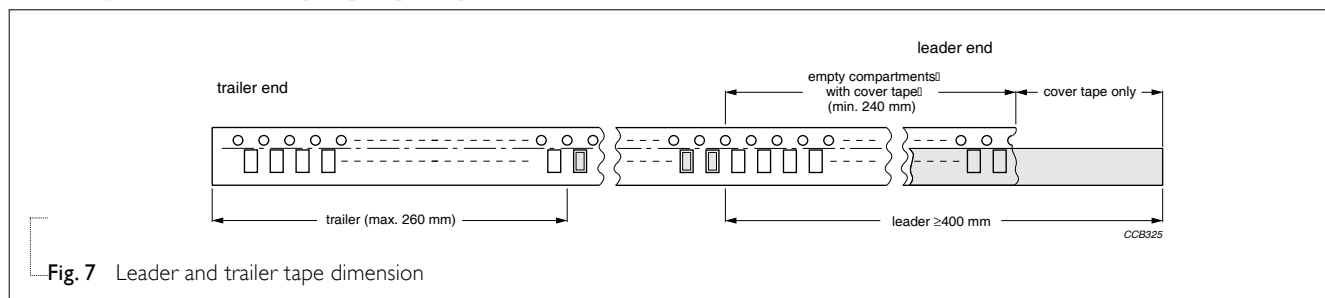
PACKING METHOD**LEADER/TRAILER TAPE SPECIFICATION**

Fig. 7 Leader and trailer tape dimension

Table 5 Packing style and packaging quantity

PACKING STYLE	REEL DIMENSION	YC358
Paper Taping Reel (R)	7" (178 mm)	4,000

TYPE	TEST METHOD	ACCEPTANCE STANDARD				
Temperature Coefficient of Resistance (T.C.R.)	<p>Measure resistance at +25°C or specified room temperature as R₁, then measure at -55°C or +125°C respectively as R₂. Determine the temperature coefficient of resistance from the following formula:</p>	<p>Formula</p> <hr/> $\text{T.C.R.} = \frac{R_2 - R_1}{R_1(t_2 - t_1)} \times 10^6 \text{ (ppm/}^\circ\text{C)}$ <p>Where t₁=+25°C or specified room temperature t₂=-55°C or +125°C test temperature R₁=resistance at reference temperature in ohms R₂=resistance at test temperature in ohms</p>				
Thermal Shock	<p>At -55±3°C for 2 minutes and at +125±2°C for 2 minutes as one cycle. After 5 cycles, the specimen shall be stabilized at room temp. Measure the resistance to determine ΔR/R(%) after one more hour.</p>	±(1%+0.05Ω)				
Low Temperature Operation	<p>Place the specimen in a test chamber maintained at -65 (+0/-5)°C. After one hour stabilization at this temperature, full rated working voltage shall be applied for 45 (+5/-0) minutes. Have 15 (+5/-0) minutes after remove the voltage, the specimen shall be removed from the chamber and stabilized at room temperature for 24 hrs. Measure the resistance to determine ΔR/R(%).</p>	±(1.0%+0.05Ω) No visible damage				
Short Time Overload	<p>Apply 2.5 times of rated voltage but not exceeding the maximum overload voltage for 5 seconds. Have the specimen stabilized at room temperature for 30 minutes minimum. Measure the resistance to determine ΔR/R(%).</p>	±(2.0%+0.05Ω) No visible damage				
Insulation Resistance	<p>Place the specimen in the jig and apply a rated continues overload voltage (R.C.O.V) for one minute as shown. Measure the insulation resistance.</p>	<table border="1"> <thead> <tr> <th>Type</th> <th>YC358</th> </tr> </thead> <tbody> <tr> <td>Voltage (DC)</td> <td>100V</td> </tr> </tbody> </table>	Type	YC358	Voltage (DC)	100V
Type	YC358					
Voltage (DC)	100V					
Dielectric Withstand Voltage	<p>Place the specimen in the jig and apply a specified value continuous overload voltage as shown for one minute.</p>	<table border="1"> <thead> <tr> <th>Type</th> <th>YC358</th> </tr> </thead> <tbody> <tr> <td>Voltage (AC)</td> <td>100Vrms</td> </tr> </tbody> </table>	Type	YC358	Voltage (AC)	100Vrms
Type	YC358					
Voltage (AC)	100Vrms					
Resistance To Soldering Heat	<p>Immerse the specimen in the solder pot at 260±5°C. for 10±1 seconds. Have the specimen stabilized at room temperature for 30 minutes minimum. Measure the resistance to determine ΔR/R(%).</p>	±(1.0%+0.05Ω) No visible damage				

TYPE	TEST METHOD	ACCEPTANCE STANDARD
Moisture Resistance	Place the specimen in the test chamber and subject to 42 damp heat cycles. Each one of which consists of the steps 1 to 7 as figure 9. The total length of test is 1,000 hours. Have the specimen stabilized at room temperature for 24 hours after testing. Measure the resistance to determine $\Delta R/R(\%)$.	$\pm(2.0\%+0.05\Omega)$ No visible damage
Life	Place the specimen in the oven at $70\pm 2^\circ\text{C}$. Apply the rated voltage to the specimen at the 1.5 hours on and 0.5 hour off cycle. The total length of test is 1,000 hours. Have the specimen stabilized at room temperature for one hour minimum after testing. Measure the $\Delta R/R(\%)$.	$\pm(2\%+0.1\Omega)$ No visible damage
Solderability	Immerse the specimen in the solder pot at $235\pm 5^\circ\text{C}$ for 5 sec.	At least 95% solder coverage on the termination
Bending Strength	Mount the specimen on a test board as shown in the figure 8. Slowly apply the force till the board is bent for 5 ± 1 sec. Measure the $\Delta R/R(\%)$ at this position.	$\pm(1.0\%+0.05\Omega)$ No visible damage




Fig. 8 Principle of the bending test

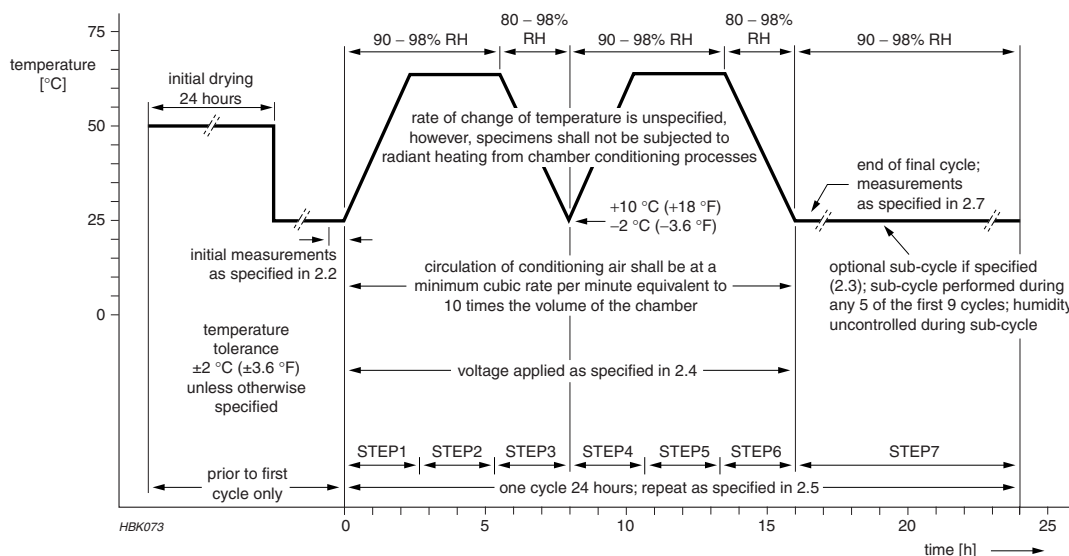


Fig. 9 Conditions by change of temperature