
2W+2W AMPLIFIER

WITH DC VOLUME CONTROL—YD7496L

DESCRIPTION

The YD7496L is a stereo 2W+2W class AB power amplifier assembled in the @ PowerDIP20 package, specially designed for high quality sound, TV and Monitor applications.

Features of the YD7496L include linear volume control, Stand-by and mute functions.

FEATURES

- *2W+2W OUTPUT POWER $R_L=8\Omega$ @ THD=10% , $V_{cc}=14V$.
- *ST-BY AND MUTE FUNCTION.
- *LOW TURN-ON TURN-OFF POP NOISE.
- *LINER VOLUME CONTROL DC COUPLED WITH POWER OP. AMP.
- *NO BOUCHEROT CELL.
- *NO ST-BY RC INPUT NETWORK.
- *SINGLE SUPPLY RANGING UP TO 15V
- *SHORT CIRCUIT PROTECTION.
- *THERMAL OVERLOAD PROTECTION.
- *INTERNALLY FIXED GAIN.
- *SOFT CLIPPING.
- *VARIABLE OUTPUT AFTER VOLUME CONTROL CIRCUIT.
- *POWERDIP 20 PACKAGE.

WuXi YouDa Electronics Co., Ltd

Add: No.5 Xijin Road, National Hi-Tech Industrial Development Zone, Wuxi Jiangsu China


Tel: 86-510-85205117 86-510-85205106 Fax: 86-510-85205110 Website: www.e-youda.com

SHENZHEN OFFICE Tel: 86-755-83740369 Fax: 86-755-83741418

YOU DA INTEGRATED CIRCUIT

YD7496L

BLOCK DIAGRAM

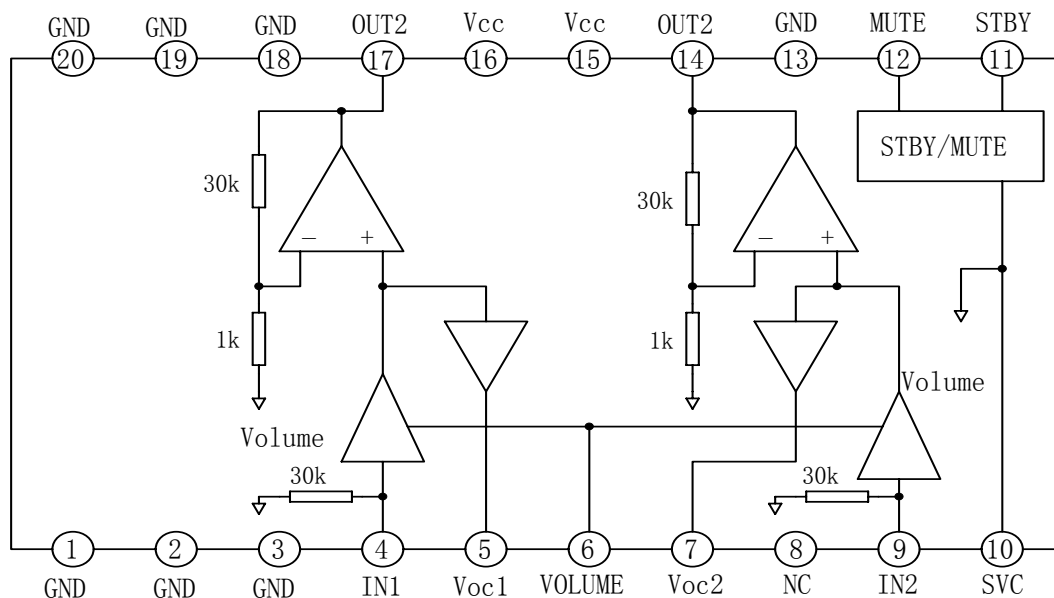

ABSOLUTE MAXIMUM RATINGS (T_{amb}=25°C)

PARAMETER		SYMBOL	VALUE	UNIT
DC Supply Voltage		V _{cc}	26	V
Maximum Input Voltage		V _{in}	8	V _{p-p}
Volume CTRL DC Voltage		V ₆	7	V
Output Peak Current(internally limited)		I _{op}	1.0	A
Power Dissipation	No Heat Sink	P _D	2	W
	T _c =60°C		6.0	
Operating Temperature		T _{opr}	-20~+70	°C
Storage Temperature		T _{stg}	-40~+150	°C

MUTE STAND-BY TRUTH TABLE

MUTE	ST-BY	OPERATING CONDITION
H	H	STANDBY
L	H	STANDBY
H	L	MUTE
L	L	PLAY

YOU DA INTEGRATED CIRCUIT


YD7496L

ELECTRICAL CHARACTERISTICS

($V_{CC}=14V, R_L=8\ \Omega, R_g=50\ \Omega, T_{amb}=25^\circ C$, Unless otherwise specified.)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Supply Range	V_{CC}		10		18	V
Quiescent Current	I_{CCQ}			25	50	mA
Input Offset Voltage	V_o			7		mV
Output Power	P_o	THD=10%	1.6	2		W
		THD=1%		1.3		
Total Harmonic Distortion	THD	$P_o=1W$			0.4	%
Closed Loop Gain	G_v	Vol Ctrl>4.5V	28.5	30	31.5	dB
Attenuation at Minimum Volume	G_{min}	Vol Ctrl<0.5V	-80			dB
Monitor Out Gain	G_{vc}	Vol Ctrl>4.5V	-1.5	0	1.5	dB
Frequency Response	BW			0.6		MHz
Input Resistance	R_{in}		22.5	30		k Ω
Total Output Noise	EN	F=20Hz~22kHz, max volume		500	800	μV
		F=20Hz~22kHz, max attenuation		100	250	μV
		F=20Hz~22kHz, mute		60	150	μV
Supply Voltage Rejection	SVR	Max volume, $C_{svr}=470\ \mu, V_r=1V$	35	39		dB
		Max attenuation, $C_{svr}=470\ \mu, V_r=1V$	55	65		dB
Thermal Muting	T_M			150		$^\circ C$
Thermal Shut-down	T_s			160		$^\circ C$
MUTE STAND-BY & INPUT SELECTION FUNCTIONS						
Stand-by ON Threshold	$V_{ST\ ON}$		3.5			V
Stand-by OFF Threshold	$V_{ST\ OFF}$				1.5	V
Mute ON Threshold	$V_{M\ ON}$		3.5			V
Mute OFF Threshold	$V_{M\ OFF}$				1.5	V
Quiescent Current @ Stand-by	$I_{CCQSTBY}$			0.6	1	mA
Mute Attenuation	G_{mute}		-50	-65		dB
Stand-by bias current	I_{stby}	Stand by on $V_{ST-BY}=5V$ $V_{MUTE}=5V$		80		μA
		Play or Mute	-20	-5		
Mute bias current	I_{mute}	Mute		1	5	μA
		Play		0.2	2	

APPLICATION CIRCUIT

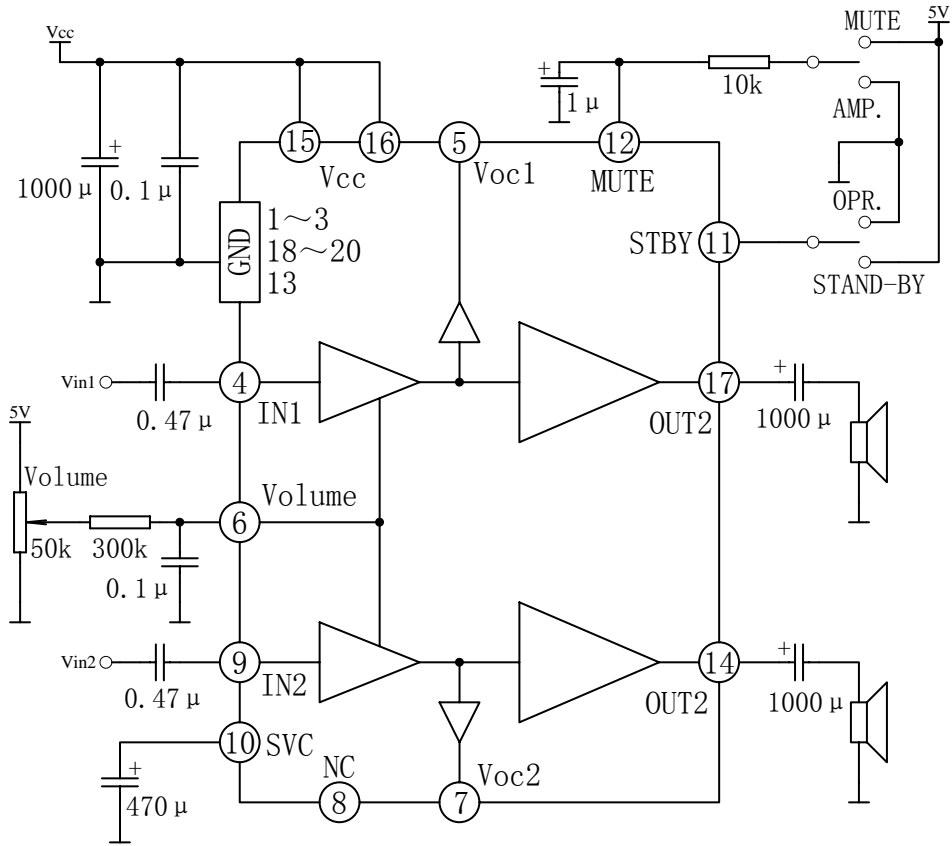

OUTLINE DRAWING

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.85		1.40	0.033		0.055
b		0.50			0.020	
b1	0.38		0.50	0.015		0.020
D			24.80			0.976
E		8.80			0.346	
e		2.54			0.100	
e3		22.86			0.900	
F			7.10			0.280
l			5.10			0.201
L		3.30			0.130	
Z			1.27			0.050

