

# YG811S06R

(60V / 5A TO-220F15)

## SCHOTTKY BARRIER DIODE

### Features

- Low  $V_F$
- Super high speed switching.
- High reliability by planer design.

### Applications

- High speed power switching.

### Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	$V_{RRM}$		60	V
Repetitive peak surge reverse voltage	$V_{RSM}$	$t_w=500ns, duty=1/40$	60	V
Isolating voltage	$V_{iso}$	Terminals to Case, AC. 1min.	1500	V
Average output current	$I_o$	$duty=1/2, T_c=127^{\circ}C$ Rectangl wave	5	A
Suege current	$I_{FSM}$	Sine wave 10ms	80	A
Operating junction temperature	$T_j$		-40 to +150	$^{\circ}C$
Storage temperature	$T_{stg}$		-40 to +150	$^{\circ}C$


- Electrical Characteristics ( $T_a=25^{\circ}C$  Unless otherwise specified )

Item	Symbol	Conditions	Max.	Unit
Forward voltage drop	$V_F$	$I_F=5.0A$	0.59	V
Reverse current	$I_R$	$V_R=V_{RRM}$	5.0	mA
Thermal resistance	$R_{th(j-c)}$	Junction to case	5.0	$^{\circ}C/W$


- Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

### Outline Drawings

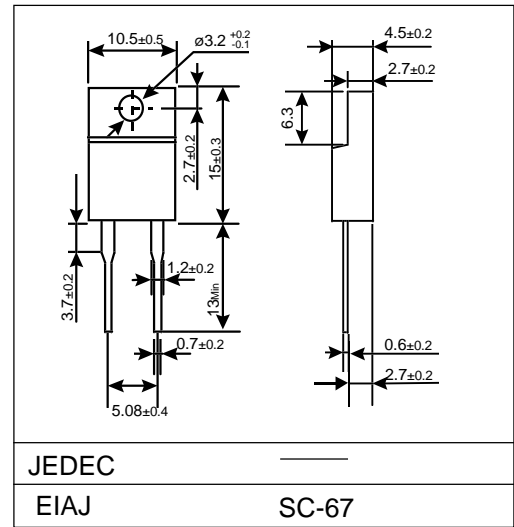

### Connection Diagram



**Characteristics**

