




给您一颗快乐的“芯”！

# YSO680PR



## Features

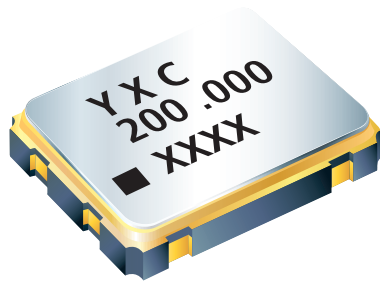

- Quartz Crystal Programmable Oscillator
- Any frequency between 1MHz~200MHz accurate to 6 decimal places
- Operating temperature from -40 to +85
- CMOS compatible output
- Industry-standard packages: 2.5 x 2.0 , 3.2 x 2.5 , 5.0 x 3.2 , 7.0 x 5.0 mm x mm

### Applications:

- Ideal for e-Books, clock for MPU, Consumer electronics, etc


## Electrical Specifications

All Min and Max limits are specified over temperature and rated operating voltage with 15 pF output load unless otherwise stated. Typical values are at 25°C and nominal supply voltage.

Parameter	1.8 V	2.5 V	3.3 V
Frequency Range	1MHz~110MHz	1MHz~166MHz	1MHz~200MHz
Supply Voltage Variation(Vdd)10%	1.62 V~1.98 V	2.25 V~2.75 V	2.97 V~3.63 V
Standby Current	15 $\mu$ A		
Frequency Tolerance	$\pm$ 20ppm, $\pm$ 25ppm, $\pm$ 50ppm, or specify		
Output Load	15 pF, or specify		
Operating Temperature Range	- 40 ~ + 85 $^{\circ}$ C, or specify		
Storage Temperature Range	- 55 ~ + 125 $^{\circ}$ C		
Voltage Vol ( Max. ) / Vol ( Min. )	VOH=90%Vdd / VOL=10%Vdd		
Duty Cycle	45~55%		
Start-up Time	10ms Max.		
Supply Current	See Below		
Frequency Aging ( at 25 $^{\circ}$ C )	$\pm$ 3 ppm / year Max.		

## Pin Description

Pin	Symbol		Functionality
1	OE/ $\overline$ ST/NC	Output Enable	Pin 1=H: Specified frequency output Pin 1=L: Pin 3 output is low. Specified frequency output stop.
		Standby	Pin 1=H: Specified frequency output Pin 1=L: Pin 3 output is low. Device goes to sleep mode. Supply current reduces to 15uA(Standby Current).
		No Connect	Pin 1=VDD or Pin 1 is Open. Specified frequency output. Pin 1 has no function.
2	GND	Power	Electrical ground
3	OUT	Output	Oscillator output
4	VDD	Power	Power supply voltage

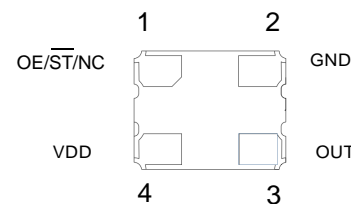

Pin Assignments



给您一颗快乐的“芯”！

# YSO680PR



## Dimensions and Patterns

Package Size – Dimensions (Unit: mm)	Recommended Land Pattern (Unit: mm)
<p><b>2.5 x 2.0 mm</b></p>	<p>TOP View Suggested Layout</p>
<p><b>3.2 x 2.5 mm</b></p>	<p>TOP View Suggested Layout</p>
<p><b>5.0 x 3.2 mm</b></p>	<p>TOP View Suggested Layout</p>
<p><b>7.0 x 5.0 mm</b></p>	<p>TOP View Suggested Layout</p>

**Notes:**

1. A capacitor of value 0.01μF~0.1μF or higher between Vdd and GND is required.



给您一颗快乐的“芯”!

# YSO680PR



## Performance Plots

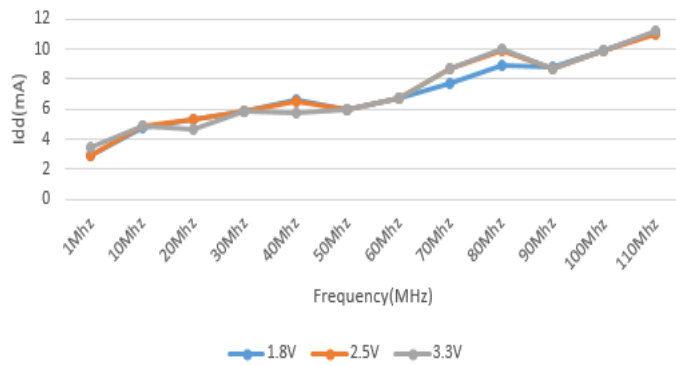


Figure 1. Idd vs Frequency

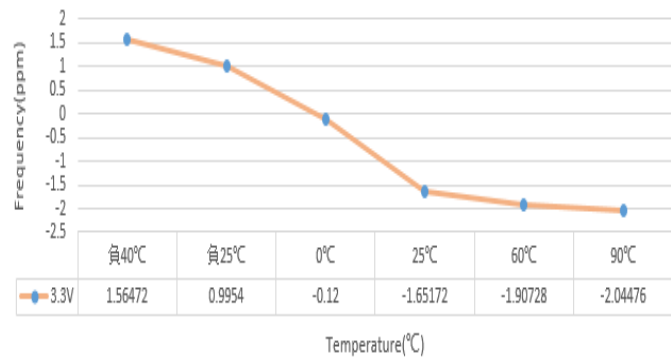


Figure 2. Frequency vs Temperature

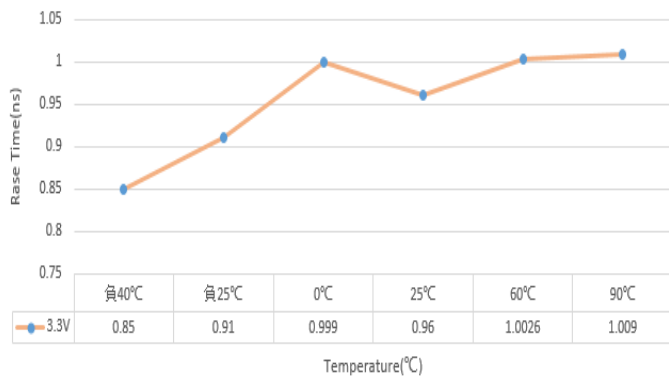


Figure 3. 20%-80% Rise Time vs Temperature

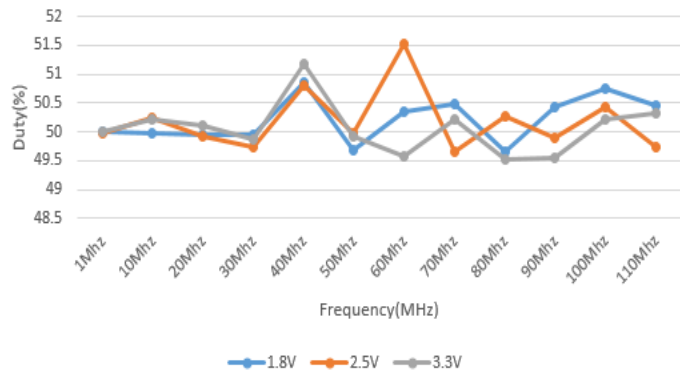


Figure 4. Duty Cycle vs Frequency

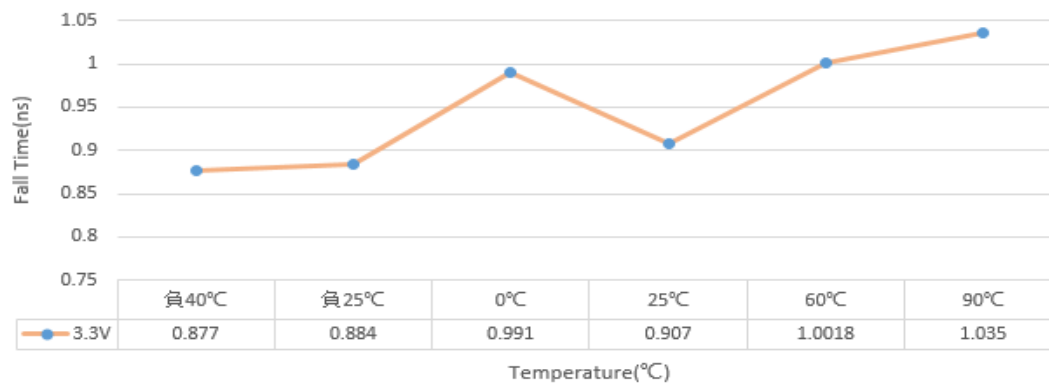


Figure 5. 20%-80% Fall Time vs Temperature

**Notes:**

- All plots are measured with 15 pF load at room temperature, unless otherwise stated.
- Phase noise plots are measured with Agilent E5052B signal source analyzer. Integration range is up to 5 MHz for carrier frequencies below 40 MHz.

come visit our site <http://www.yxc.hk>



给您一颗快乐的“芯”！

# YSO680PR




★ PART NUMBER GUIDE 部件号示例 e.g. OP7050200MEDA4SI - u YSO680PR=7.0 ×5.0 SMD SEAM TYPE

Quartz Crystal Oscillator	Dimensions	Frequency (Hz)	Supply voltage (V)	Frequency Stability Overall (ppm)	output	Pin	Material	Operating Temp. Range	-	Remark
OP	7050	200M	E	D	A	4	S	I	-	u

★ INPUT CURRENT 工作电流

Supply Voltage	Power Dissipation				
	1.000 ~ 30.000 MHz	30.000 ~ 75.000 MHz	75.000 ~ 110.000 MHz	133.000 ~ 166.000 MHz	166.000 ~ 200.000 MHz
1.8 V	6 mA max	8 mA max	12 mA max	—	—
2.5 V	8 mA max	10 mA max	15 mA max	15 mA max	—
3.3 V	10 mA max	15 mA max	20 mA max	22 mA max	25 mA max

★ REFLOW SOLDERING PROFILE 回流焊特性

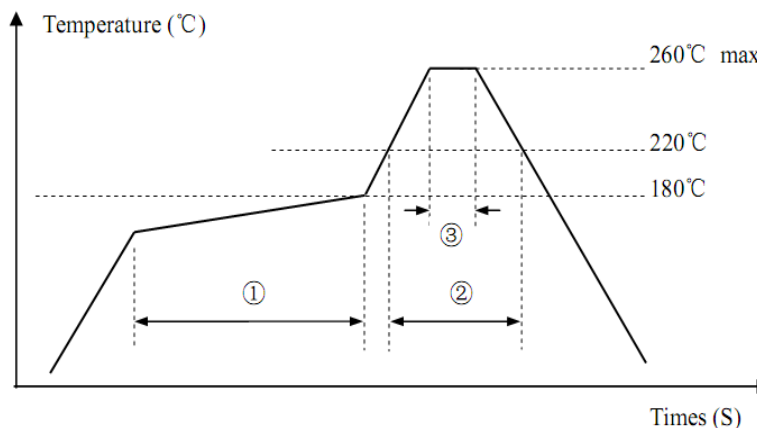

Pb free reflow A	①	Preheat	160~180°C	120sec. max
	②	Primary heat	220°C	60sec. max
	③	Peak	260°C	10sec. max.

★ Test Circuit 测试电路

