

Coaxial

Power Splitter/Combiner

ZN2PD-63+

2 Way-0° 50Ω 1800 to 6000 MHz


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.25W max.

Coaxial Connections

SUMPORT	S
PORT 1	1
PORT 2	2

Outline Drawing

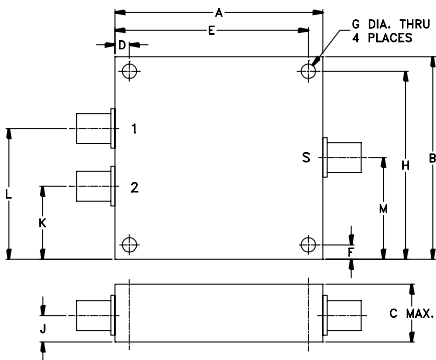

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
1.80	1.75	.66	.125	1.675	.125	.125
45.72	44.45	16.76	3.18	42.55	3.18	3.18
H	J	K	L	M	wt	
1.625	.31	.63	1.13	.88	grams	
41.28	7.87	16.00	28.70	22.35	34	

Features

- wide frequency band, 1800-6000 MHz
- high isolation, 19 dB min.
- very good VSWR, 1.22:1 typ.

Applications

- PCS
- WIMAX
- satellite up & down links
- line of sight links



CASE STYLE: VVV180

Connectors	Model	Price	Qty.
SMA	ZN2PD-63-S+	\$59.95 ea.	(1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS
Compliance. See our web site for RoHS Compliance
methodologies and qualifications.


Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.			S Typ.	S Max.	OUT Typ.	OUT Max.
f _L -f _U 1800-6000	24	19	0.4	0.7	4	0.3	1.22	1.55	1.18	1.30


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
1800.00	3.33	3.31	0.02	21.91	0.54	1.42	1.16	1.18
2000.00	3.31	3.29	0.02	25.15	0.61	1.32	1.16	1.17
2200.00	3.30	3.27	0.03	26.23	0.66	1.22	1.15	1.16
2400.00	3.30	3.27	0.03	25.00	0.72	1.12	1.13	1.14
2600.00	3.31	3.28	0.03	23.60	0.80	1.03	1.11	1.12
3000.00	3.35	3.31	0.04	22.50	0.96	1.12	1.12	1.13
3400.00	3.37	3.33	0.04	24.13	1.01	1.19	1.13	1.14
3800.00	3.38	3.32	0.05	28.69	1.11	1.17	1.12	1.12
4200.00	3.38	3.32	0.06	31.64	1.20	1.13	1.09	1.07
4600.00	3.40	3.34	0.06	27.68	1.27	1.14	1.07	1.07
5000.00	3.45	3.39	0.07	25.60	1.34	1.15	1.09	1.11
5400.00	3.49	3.41	0.08	25.15	1.45	1.10	1.11	1.12
5600.00	3.50	3.42	0.08	24.70	1.47	1.06	1.13	1.12
5800.00	3.49	3.41	0.08	23.45	1.54	1.03	1.12	1.12
6000.00	3.50	3.41	0.09	21.28	1.62	1.09	1.11	1.11


ZN2PD-63+
INSERTION LOSS

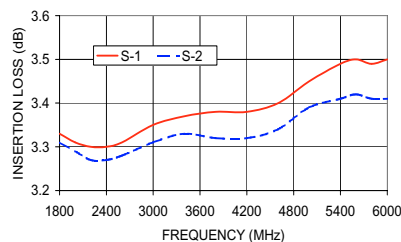


ZN2PD-63+
ISOLATION

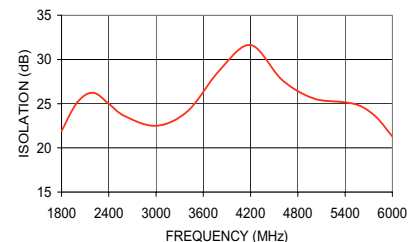

ZN2PD-63+
VSWR

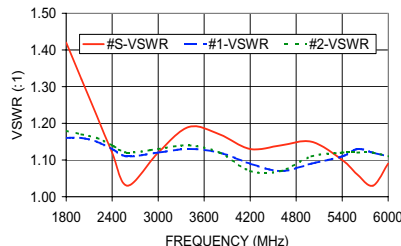

electrical schematic

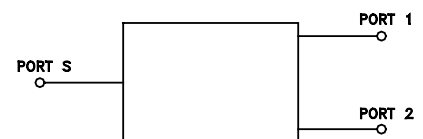

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. OR
M106537
ED-12512/1
ZN2PD-63+
HY/CP/AM
080610