

www.DataSheet4U.com

***THIS DOCUMENT IS FOR MAINTENANCE
PURPOSES ONLY AND IS NOT
RECOMMENDED FOR NEW DESIGNS***



www.DataSheet4U.com

ZN458

2.45V PRECISION REFERENCE REGULATOR

The ZN458 is a monolithic integrated circuit providing a precise stable reference source of 2.45V in a two lead package without the need for an external shaping capacitor.

FEATURES

- Guaranteed 5mV Maximum Deviation over Full Temperature Range
- Low Temperature Coefficient 0.003%/°C
- Low Slope Resistance - 0.1 Ohms
- Very Good Long Term Stability - 10ppm
- Low Noise - 10 microvolts
- Internally Shaped
- Tight Tolerance ±1.43%
- Two Pin Package
- Wide Operating Current 2-120mA

ABSOLUTE MAXIMUM RATINGS

Dissipation	300mW
Operating temperature range	-20°C to +70°C
Storage temperature range	-55°C to +150°C

ORDERING INFORMATION

Device	TC (ppm/°C)	Temperature range
ZN458	99	-20°C to +70°C
ZN458A	49	-20°C to +70°C
ZN458B	29	-20°C to +70°C

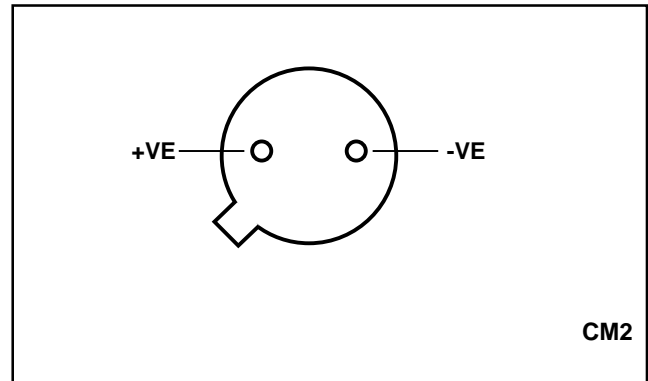


Fig.1 Pin connection - bottom view

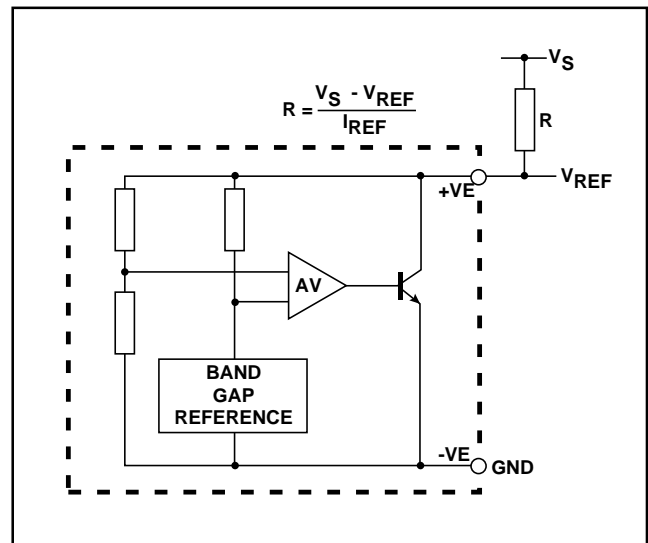


Fig.2 Circuit diagram

ZN458

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Units	Test conditions
Output voltage	V_{REF}	2.42	2.45	2.49	V	Measured at 2mA
Slope resistance	R_{REF}	-	0.1	0.2	Ω	
Reference current	I_{REF}	2.0	-	120	mA	
Maximum change in V_{REF}	ΔV_{REF}	-	10	22	mV	-20 to +70°C
ZN458		-	6	11	mV	
ZN458A		-	4	6.5	mV	
RMS noise voltage 1Hz-10kHz		-	10	-	μV	
V_{REF} drift at 70°C		-	± 10	-	ppm/1000 hours	

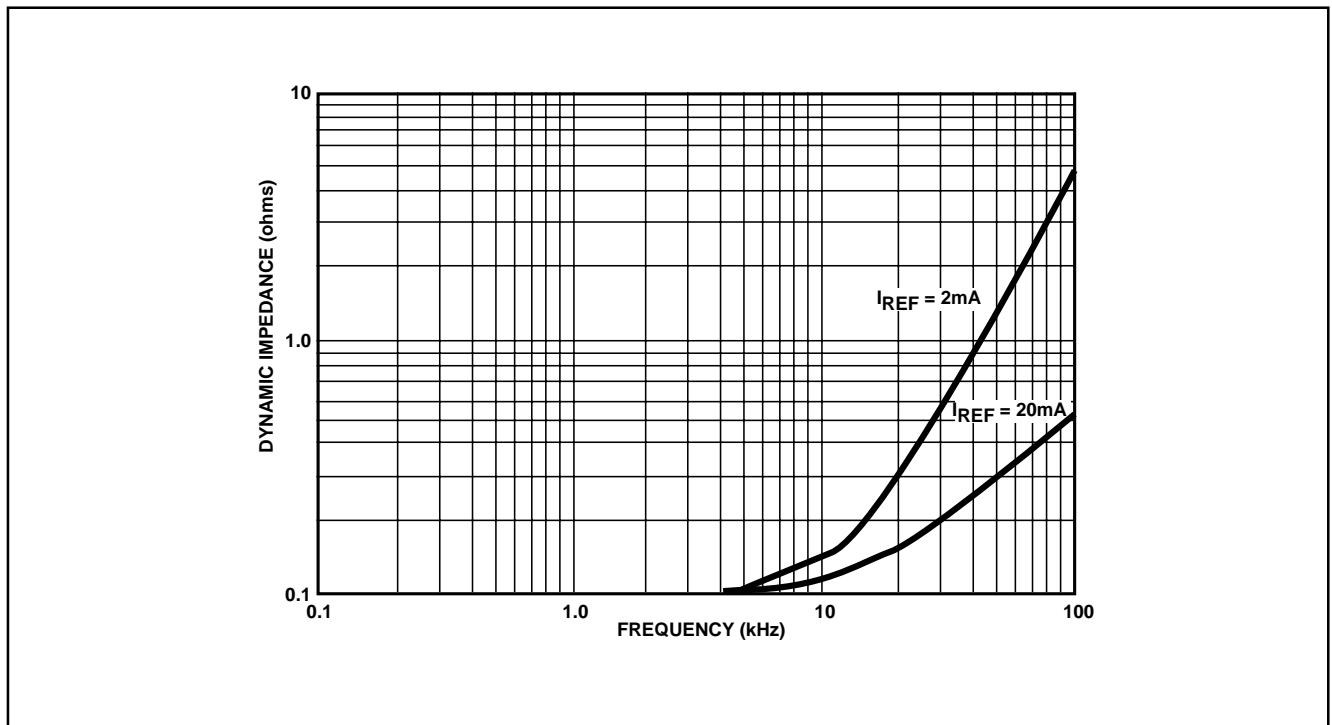


Fig.3 Dynamic impedance

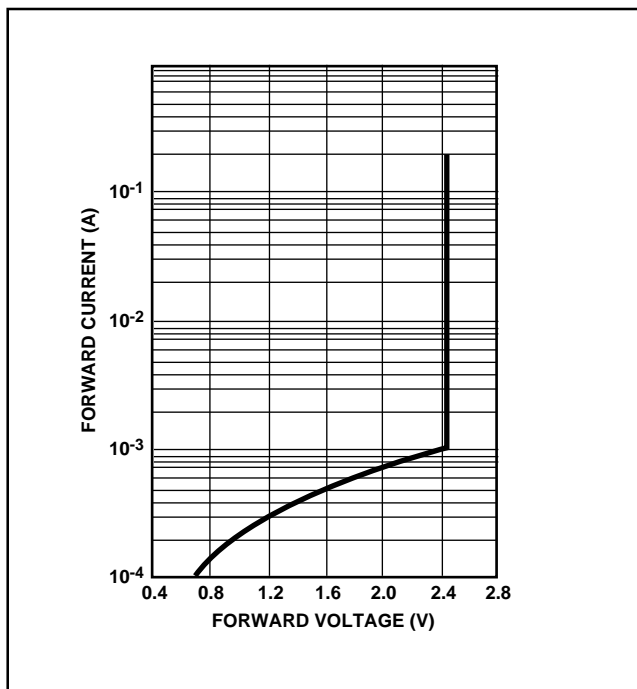


Fig.4 Forward characteristic

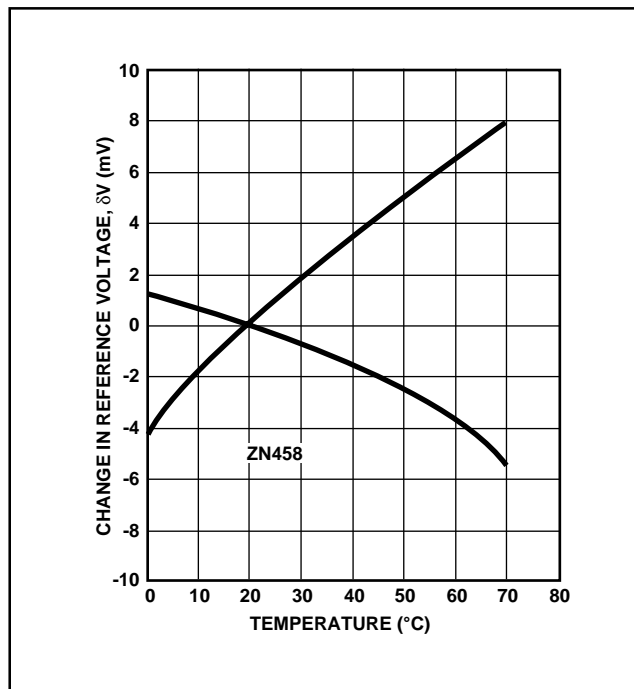


Fig.5 Temperature characteristic (typical)

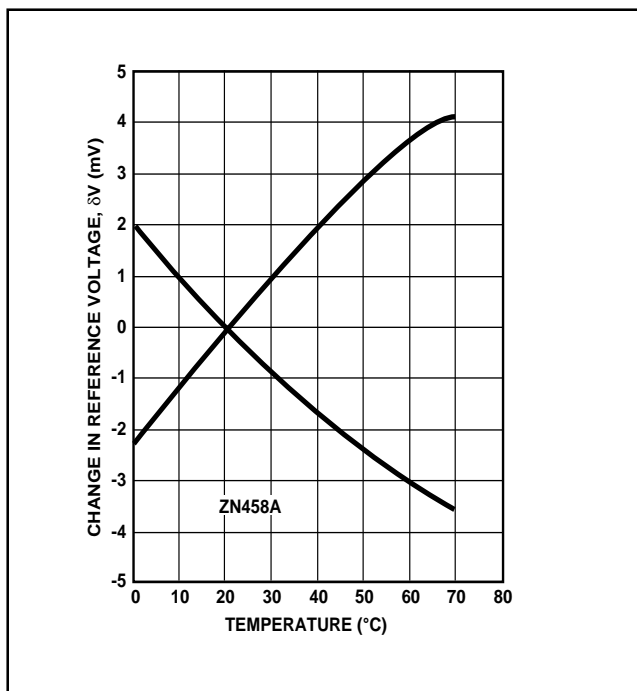


Fig.6 Temperature characteristic (typical)

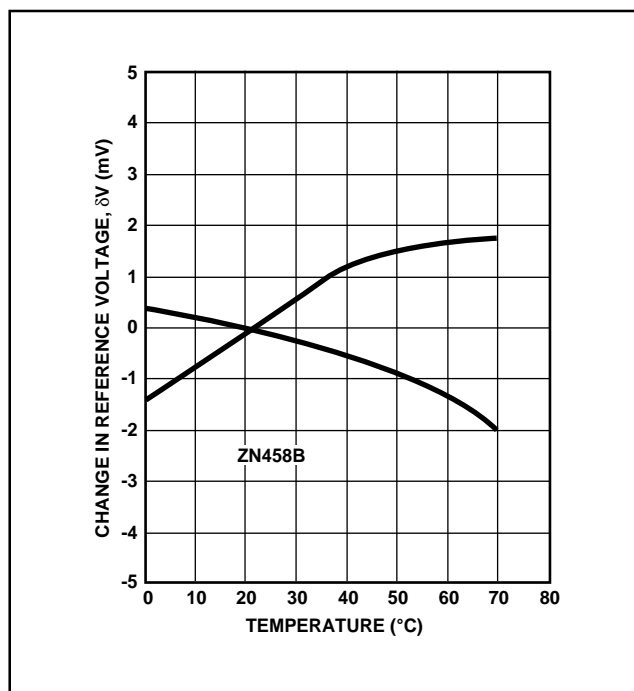


Fig.7 Temperature characteristic (typical)

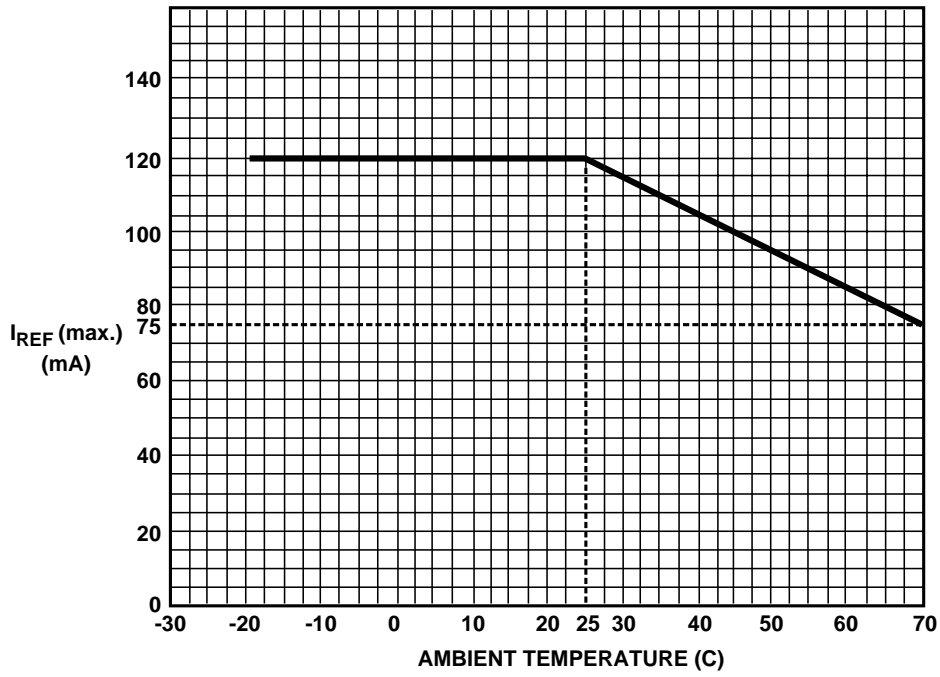


Fig.8 Derating curve



HEADQUARTERS OPERATIONS
GEC PLESSEY SEMICONDUCTORS
Cheney Manor, Swindon,
Wiltshire SN2 2QW, United Kingdom.
Tel: (0793) 518000
Fax: (0793) 518411

GEC PLESSEY SEMICONDUCTORS
P.O. Box 660017
1500 Green Hills Road,
Scotts Valley, California 95067-0017,
United States of America.
Tel: (408) 438 2900
Fax: (408) 438 5576

CUSTOMER SERVICE CENTRES

- **FRANCE & BENELUX** Les Ulis Cedex Tel: (1) 64 46 23 45 Fax : (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 3609 06-0 Fax : (089) 3609 06-55
- **ITALY** Milan Tel: (02) 66040867 Fax: (02) 66040993
- **JAPAN** Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- **NORTH AMERICA Integrated Circuits and Microwave Products** Scotts Valley, USA
Tel (408) 438 2900 Fax: (408) 438 7023.
Hybrid Products, Farmingdale, USA Tel (516) 293 8686 Fax: (516) 293 0061.
- **SOUTH EAST ASIA** Singapore Tel: (65) 3827708 Fax: (65) 3828872
- **SWEDEN** Stockholm, Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **UK, EIRE, DENMARK, FINLAND & NORWAY**
Swindon Tel: (0793) 518510 Fax : (0793) 518582

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1994 Publication No. DS3025 Issue No. 2.1 January 1994