

High IP3

Low Noise Amplifier

50Ω 1000 to 2400 MHz

NEW!

ZRL-2400LN



BLUE CELL™

CASE STYLE: FJ893

PRICE: \$139.95 ea. QTY (1-9)

Maximum Ratings

Operating Temperature	-40°C to 80°C case -40°C to 60°C ambient
Storage Temperature	-55°C to 100°C
DC Voltage	+17V max.



Features

- high IP3, +45 dBm typ.
- low noise figure, 1.2 dB typ.
- broadband flat gain response
- internal voltage regulated
- over voltage and transient protected

Applications

- very low noise
- high dynamic range
- PCS, UMTS, GSM, cellular, wireless data
- defense communications
- satellite communications

Outline Drawing

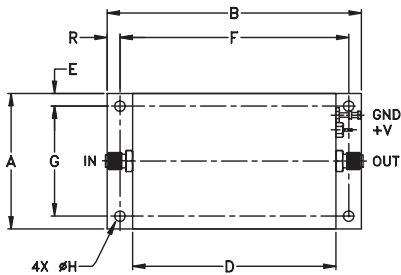

Outline Dimensions (inch/mm)





A	B	C	D	E	F	G	H	J
2.00	3.75	.80	3.00	.19	3.374	1.624	.156	.44
50.80	95.25	20.32	76.20	4.83	85.70	41.25	3.96	11.18
K	L	M	N	P	Q	R	S	wt.
.26	1.00	.51	.22	.26	—	.19	.10	grams
6.60	25.40	12.95	5.59	6.60	—	4.83	2.54	135

Electrical Specifications (T_{AMB} = 25°C)

FREQ. RANGE (MHz)	GAIN (dB)		NOISE FIGURE (dB)		MAXIMUM POWER (dBm)			INTERCEPT POINT IP3 dBm Typ.*	VSWR (:1)		DIRECTIVITY (dB) Typ.	DC POWER			
	Typ.	Min.	Typ.	Max.	Output (1 dB Comp.)	Input (no damage)	In		Out	Volt ¹ Typ.		Max. Current (mA)			
1000-2400															
1000-1400	31	28	±1.6	±2.0	1.2	2.0	23	21	+10	45	1.50	1.35	13	12	500
1400-1900	27	24	±1.8	±2.2	1.0	1.4	24	23	+10	44	1.15	1.25	16	12	500
1900-2400	25	23	±1.0	±2.0	1.2	1.4	24	23	+10	45	1.20	1.30	16	12	550

* 1MHz tone spacing

¹ Other voltages available in the 6.5 to 17V range, please contact factory.

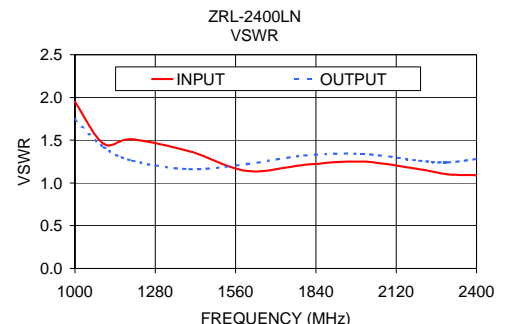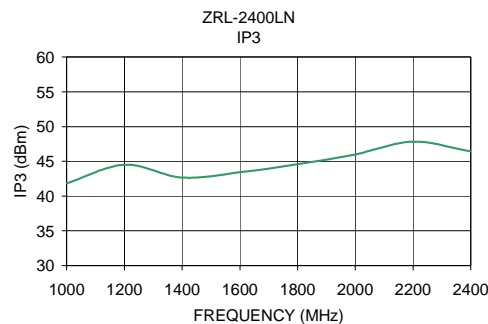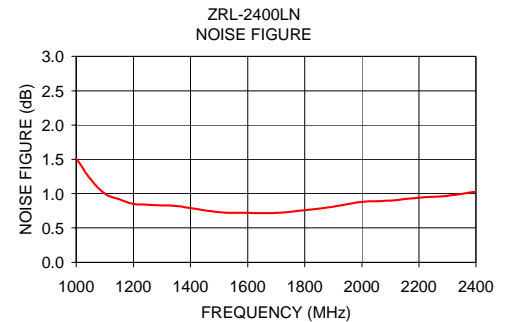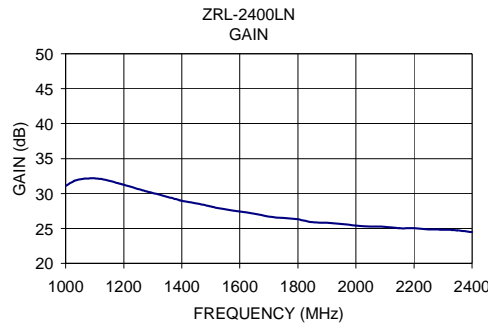

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. E
M92817
ZRL-2400LN
EDB020608
BLUEC/TD/CP
040826