


ZTBF Series

- Surface Mount
- Fast Delivery
- Tape & Reel or Bulk Packaging
- Highly Competitive Prices for Volume Users

www.DataSheet4U.com



Series	Frequency Range	Frequency Tolerance	ESR	Temperature Tolerance	Aging
ZTBF---P	375 -440kHz	+/-2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTBF---E	441 -509kHz	+/-2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTBF---P	510 -699kHz	+/-2.0kHz	20Ω	+/- 0.3%	+/- 0.5%
ZTBF---J	700 -999kHz	+/- 0.5%	70Ω	+/- 0.3%	+/- 0.5%
ZTBF---MJ	1.0 – 1.25MHz	+/- 0.5%	100Ω	+/- 0.3%	+/- 0.5%

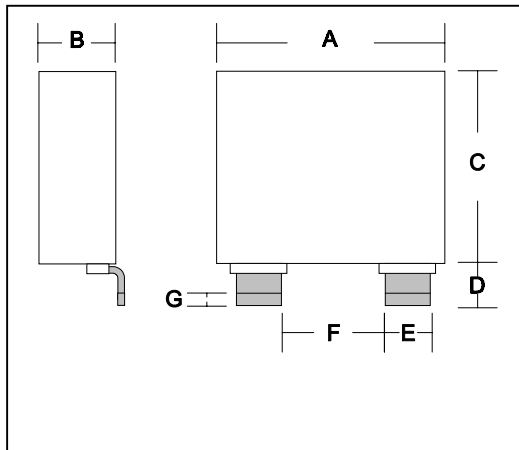

Series	A	B	C	D	E	F	G
ZTBF--P	7.9	3.6	9.3	0.9	1.0	3.6	0.7
ZTBF--E	7.0	3.5	9.0	0.9	0.9	3.5	0.6
ZTBF--J/MJ	5.0	2.2	6.0	0.6	0.8	2.2	0.6

Dimensions in mm