

Directional Coupler

ZX30-20-4

50Ω

5 to 1000 MHz



Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Coaxial Connections

INPUT	1
OUTPUT	2
COUPLED	3

Features

- very flat coupling
- very broad, multi-octave
- all welded construction
- protected by U.S. Patent 6,140,887 & 6,784,531

CASE STYLE: FL905

Connectors	Model	Price	Qty.
SMA	ZX30-20-4-S	\$29.95	(1-24)

Applications


- VHF/UHF
- instrumentation
- communication receivers & transmitters
- cable tv

Directional Coupler Electrical Specifications (T_{AMB}= 25°C)

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)			DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W							
	Nom.	Typ. Flatness	L Typ. Max.	M Typ. Max.	U Typ. Max.	L Typ. Min.	M Typ. Min.	U Typ. Min.		L Max.	MU Max.						
f _L -f _U																	
5-1000	20.5±0.6	±0.5	0.3	0.5	0.35	0.6	0.6	0.9	21	19	22	19	19	11	1.11	1.0	1.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]
 1. Mainline loss includes theoretical power loss at coupled port.

Outline Drawing

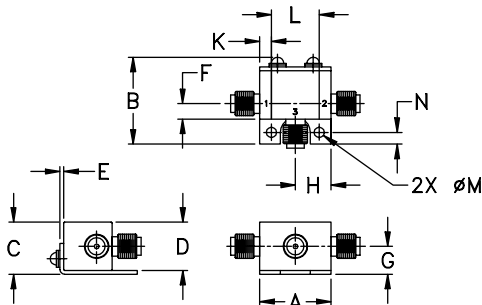

Outline Dimensions (inch mm)


A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0


Typical Performance Data

Frequency (MHz)	Insertion Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
20.00	0.29	20.09	21.35	29.65	33.25	27.81
100.00	0.29	20.12	22.22	29.95	33.34	27.20
180.00	0.32	20.16	23.67	30.03	32.96	25.43
260.00	0.33	20.17	26.11	30.01	32.22	23.53
340.00	0.34	20.18	29.14	29.95	31.83	21.53
450.00	0.36	20.20	28.63	30.13	30.82	19.44
575.00	0.41	20.29	22.50	30.59	30.09	17.36
750.00	0.46	20.46	16.86	32.61	29.81	15.04
875.00	0.51	20.63	14.14	35.69	28.84	13.69
1000.00	0.56	20.85	12.18	41.42	27.44	12.56


ZX30-20-4 INSERTION LOSS

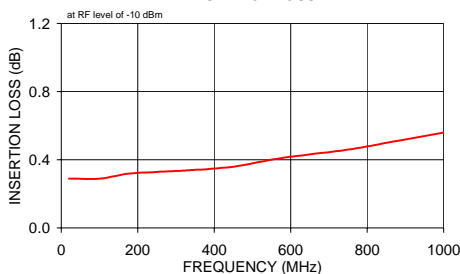

ZX30-20-4 COUPLING & DIRECTIVITY

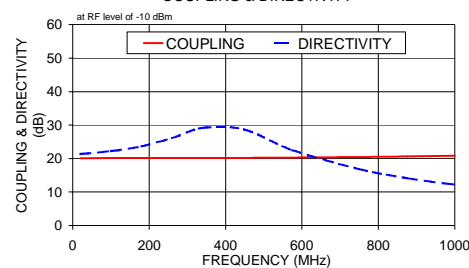

ZX30-20-4 RETURN LOSS

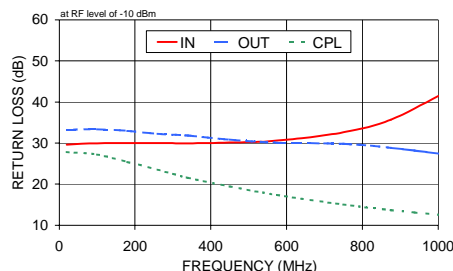

electrical schematic

