


ZXMN2B03E6

20V SOT23-6 N-channel enhancement mode MOSFET with low gate drive capability

Summary

$V_{(BR)DSS}$	$R_{DS(on)}$ (Ω)	I_D (A)
20	0.040 @ $V_{GS} = 4.5V$	5.4
	0.055 @ $V_{GS} = 2.5V$	4.6
	0.075 @ $V_{GS} = 1.8V$	4.0



Description

This new generation trench MOSFET from Zetex features low on-resistance achievable with low gate drive.

Features

- Low on-resistance
- Fast switching speed
- Low gate drive capability
- SOT23-6 package

Applications



- DC-DC converters
- Power management functions
- Disconnect switches
- Motor control

Ordering information

Device	Reel size (inches)	Tape width (mm)	Quantity per reel
ZXMN2B03E6TA	7	8	3,000

Device marking

2B3



Absolute maximum ratings

Parameter	Symbol	Limit	Unit
Drain-source voltage	V_{DSS}	20	V
Gate-source voltage	V_{GS}	± 8	V
Continuous drain current @ $V_{GS} = 4.5V$; $T_{amb} = 25^{\circ}C^{(b)}$ @ $V_{GS} = 4.5V$; $T_{amb} = 70^{\circ}C^{(b)}$ @ $V_{GS} = 4.5V$; $T_{amb} = 25^{\circ}C^{(a)}$	I_D	5.4 4.3 4.3	A
Pulsed drain current ^(c)	I_{DM}	26	A
Continuous source current (body diode) ^(b)	I_S	2.8	A
Pulsed source current (body diode) ^(c)	I_{SM}	26	A
Power dissipation at $T_{amb} = 25^{\circ}C^{(a)}$	P_D	1.1	W
Linear derating factor		8.8	mW/ $^{\circ}C$
Power dissipation at $T_{amb} = 25^{\circ}C^{(b)}$	P_D	1.7	W
Linear derating factor		13.7	mW/ $^{\circ}C$
Operating and storage temperature range	T_J, T_{stg}	-55 to +150	$^{\circ}C$

Thermal resistance

Parameter	Symbol	Limit	Unit
Junction to ambient ^(a)	$R_{\theta JA}$	113	$^{\circ}C/W$
Junction to ambient ^(b)	$R_{\theta JA}$	73	$^{\circ}C/W$

NOTES:





(a) For a device surface mounted on 25mm x 25mm FR4 PCB with high coverage of single sided 1oz copper, in still air conditions.

(b) For a device surface mounted on FR4 PCB measured at $t \leq 5$ sec.

(c) Repetitive rating - 25mm x 25mm FR4 PCB, $D=0.02$, pulse width 300 μs - pulse width limited by maximum junction temperature.

ZXMN2B03E6

Thermal characteristics

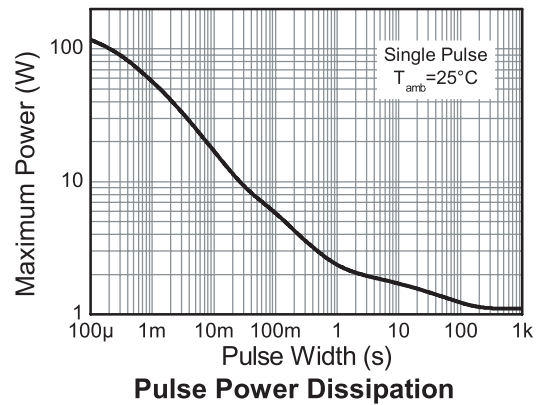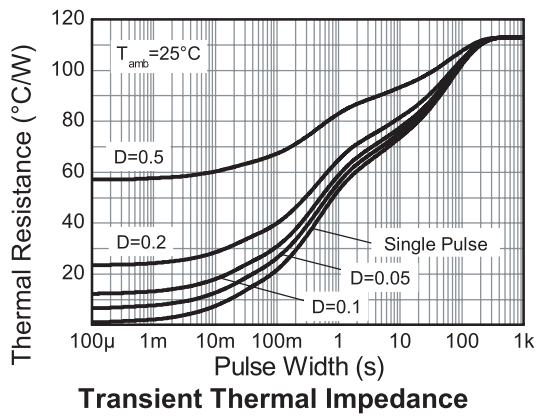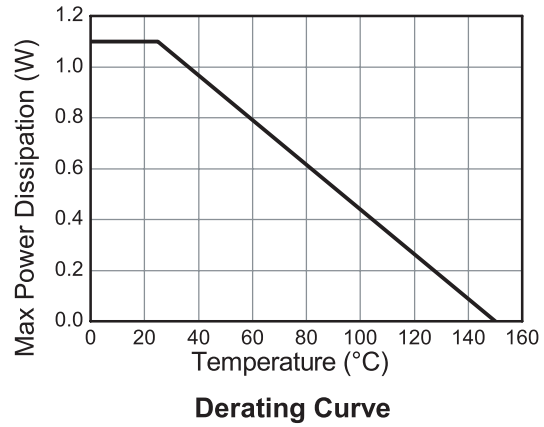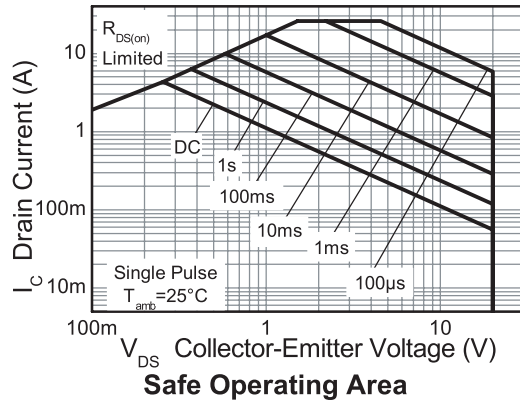

ZXMN2B03E6

Electrical characteristics (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Static						
Drain-source breakdown voltage	V _{(BR)DSS}	20			V	I _D = 250μA, V _{GS} =0V
Zero gate voltage drain current	I _{DSS}			1	μA	V _{DS} = 20V, V _{GS} =0V
Gate-body leakage	I _{GSS}			100	nA	V _{GS} =±8V, V _{DS} =0V
Gate-source threshold voltage	V _{GS(th)}	0.4		1.0	V	I _D = 250μA, V _{DS} =V _{GS}
Static drain-source on-state resistance ^(*)	R _{DS(on)}			0.040	Ω	V _{GS} = 4.5V, I _D = 4.3A
				0.055	Ω	V _{GS} = 2.5V, I _D = 3.7A
				0.075	Ω	V _{GS} = 1.8V, I _D = 3.2A
Forward transconductance ^(*) (‡)	g _{fs}		13.5		S	V _{DS} = 10V, I _D = 4.3A
Dynamic ^(‡)						
Input capacitance	C _{iSS}		1160		pF	V _{DS} = 10V, V _{GS} =0V f=1MHz
Output capacitance	C _{oSS}		210		pF	
Reverse transfer capacitance	C _{rSS}		136		pF	
Switching ^(†) (‡)						
Turn-on-delay time	t _{d(on)}		4.2		ns	V _{DD} = 10V, V _{GS} = 4.5V I _D = 1A R _G ≈ 6.0Ω
Rise time	t _r		6.2		ns	
Turn-off delay time	t _{d(off)}		33.9		ns	
Fall time	t _f		12.4		ns	
Total gate charge	Q _g		14.5		nC	V _{DS} = 10V, V _{GS} = 4.5V I _D = 4.3A
Gate-source charge	Q _{gs}		2		nC	
Gate drain charge	Q _{gd}		2.8		nC	
Source-drain diode						
Diode forward voltage ^(*)	V _{SD}		0.67	0.95	V	T _j =25°C, I _S = 1.8A, V _{GS} =0V
Reverse recovery time ^(‡)	t _{rr}		10.8		ns	T _j =25°C, I _F = 2.8A, di/dt=100A/μs
Reverse recovery charge ^(‡)	Q _{rr}		3.4		nC	







NOTES:

(*) Measured under pulsed conditions. Pulse width $\leq 300\mu\text{s}$; duty cycle $\leq 2\%$.







(†) Switching characteristics are independent of operating junction temperature.

(‡) For design aid only, not subject to production testing.

Typical characteristics

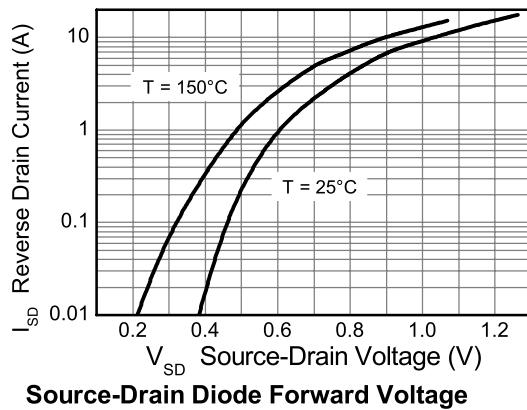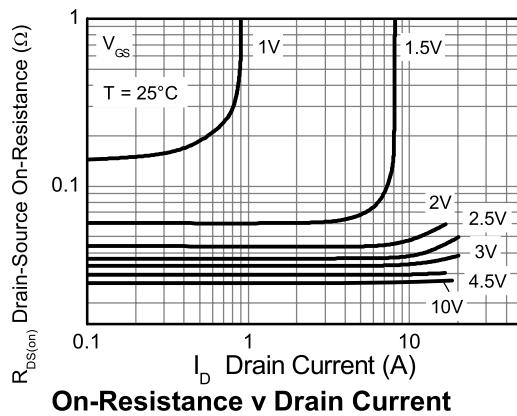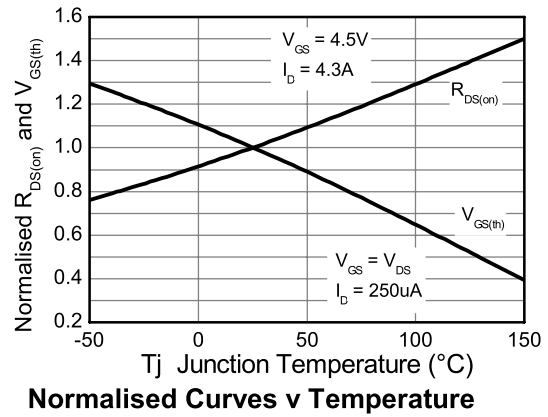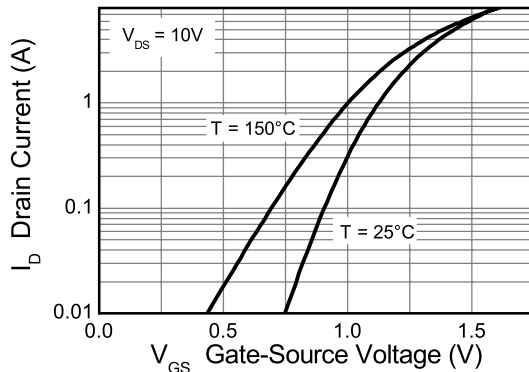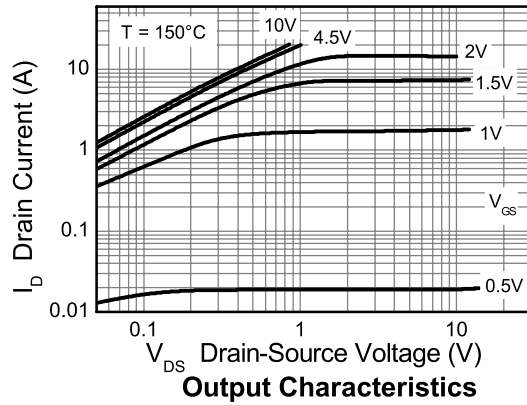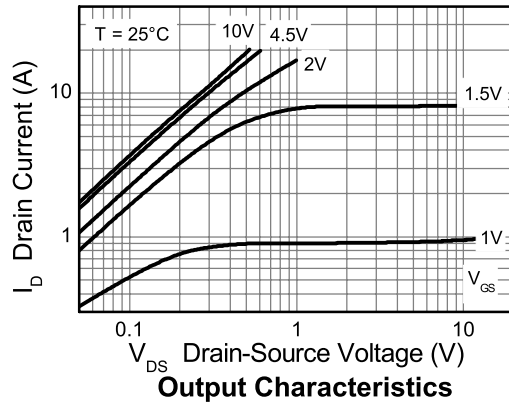

Typical characteristics

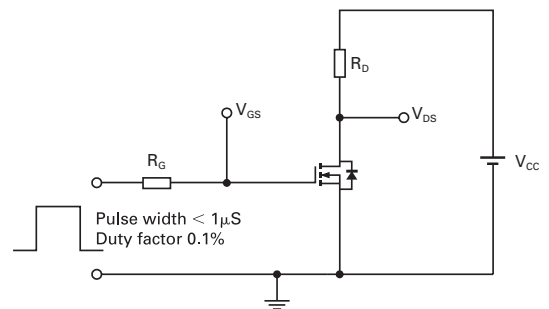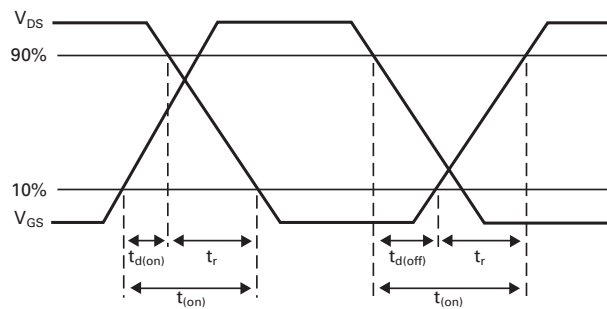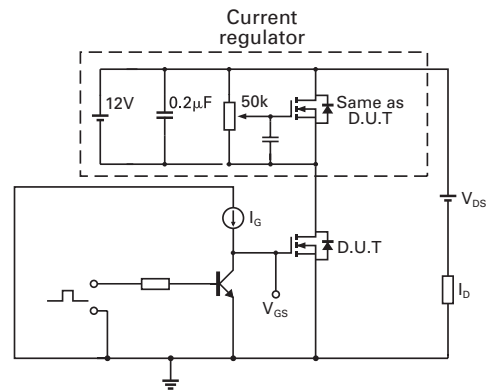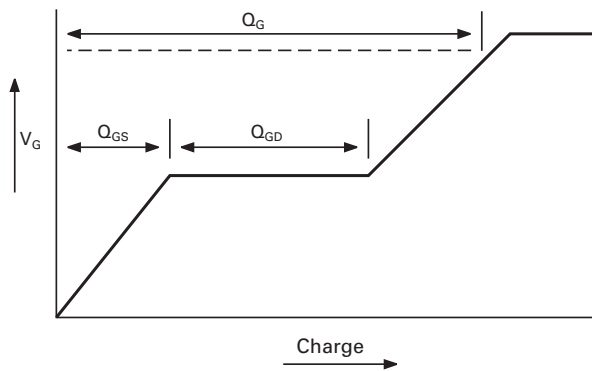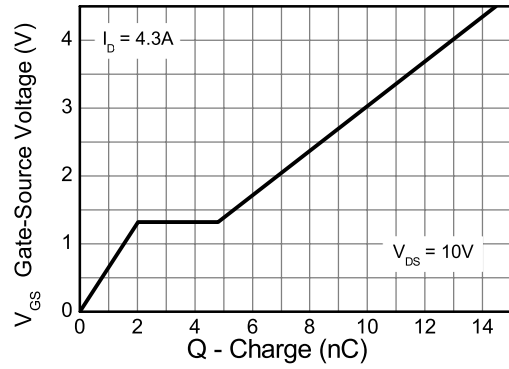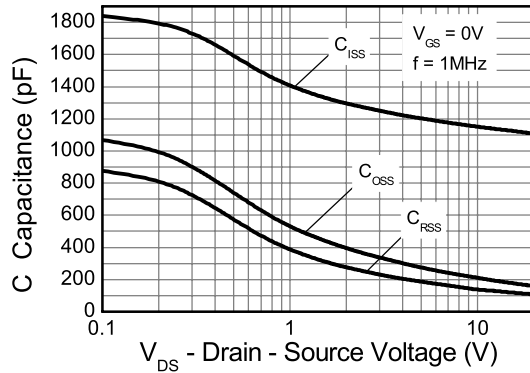


ZXMN2B03E6

Intentionally left blank

ZXMN2B03E6

Package outline - SOT23-6

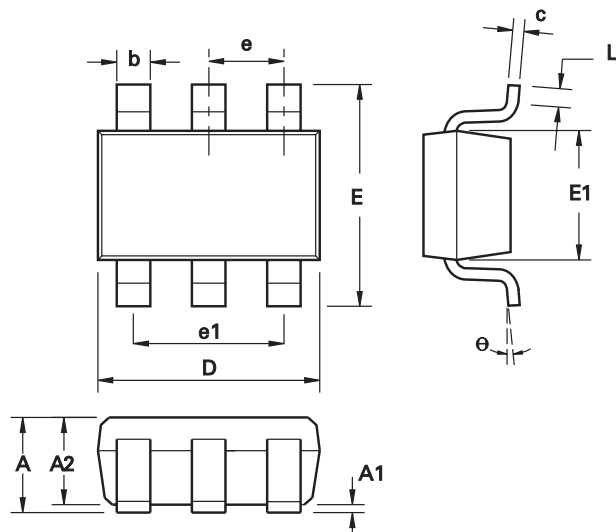

DIM	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.45	0.354	0.0570
A1	0.00	0.15	0.00	0.0059
A2	0.90	1.30	0.0354	0.0511
b	0.35	0.50	0.0078	0.0196
C	0.09	0.26	0.0035	0.0102
D	2.70	3.10	0.1062	0.1220
E	2.20	3.20	0.0866	0.1181
E1	1.30	1.80	0.0511	0.0708
L	0.10	0.60	0.0039	0.0236
e	0.95 REF		0.0374 REF	
e1	1.90 REF		0.0748 REF	
L	0°	30°	0°	30°

Note: Controlling dimensions are in millimeters. Approximate dimensions are provided in inches

Europe

Zetex GmbH
Kustermann-park
Balanstraße 59
D-81541 München
Germany
Telefon: (49) 89 45 49 49 0
Fax: (49) 89 45 49 49 49
europe.sales@zetex.com

Americas

Zetex Inc
700 Veterans Memorial Highway
Hauppauge, NY 11788
USA
Telephone: (1) 631 360 2222
Fax: (1) 631 360 8222
usa.sales@zetex.com

Asia Pacific

Zetex (Asia Ltd)
3701-04 Metroplaza Tower 1
Hing Fong Road, Kwai Fong
Hong Kong
Telephone: (852) 26100 611
Fax: (852) 24250 494
asia.sales@zetex.com

Corporate Headquarters

Zetex Semiconductors plc
Zetex Technology Park, Chadderton
Oldham, OL9 9LL
United Kingdom
Telephone: (44) 161 622 4444
Fax: (44) 161 622 4446
hq@zetex.com

For international sales offices visit www.zetex.com/offices

Zetex products are distributed worldwide. For details, see www.zetex.com/salesnetwork

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.