



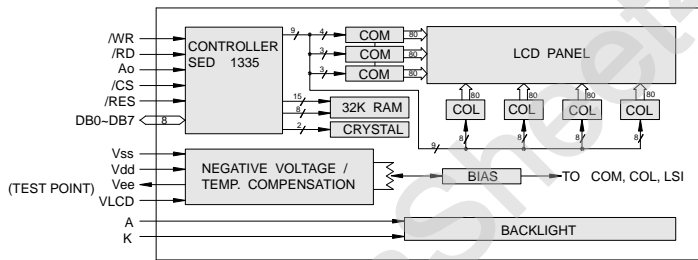

OUTLINE DIMENSIONS BLOCK DIAGRAM

液晶之父 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

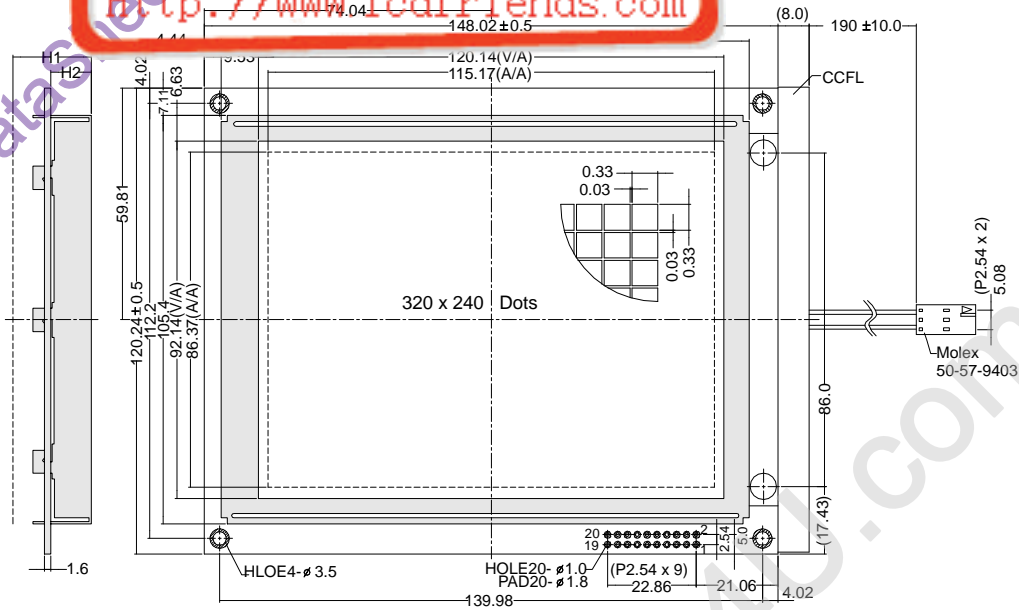

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION

Overall Size	148.02 x 120.24	Module	H2 / H1
View Area	120.14 x 92.14	W / O B/L	- / -
Dot Size	0.33 x 0.33	EL B/L	- / -
Dot Pitch	0.36 x 0.36	LED CCFL B/L	10.5 / 20.3

PIN ASSIGNMENT

Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	V _{LCD}	Contrast Adjust
4	RD	Data Read
5	WR	Data Write
6	Ao	Command / Data select
7-14	DB0-DB7	Data bus line
15	CS	Chip select
16	RST	Reset
17	Vee	Negative voltage input
18	FG	Frame Ground
19/20	NC	No Connection

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7.0	V
LCD driving supply voltage	Vdd-Vee	25°C	0	35.0	V
Input voltage	V _{in}	25°C	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typical	Max.	Units	
Power supply voltage	Vdd-Vss	25°C	4.5	-	5.5	V	
LCD operation voltage	Vop	Top	N	W	N	W	V
		-20°C	-	-	-	-	V
		0°C	-	-	26.4	-	V
		25°C	-	-	24.8	-	V
		50°C	-	-	24.2	-	V
70°C	-	-	-	-	V		
LCM current consumption (No B/L)	I _{dd}	Vdd=5V	-	50	-	mA	
Backlight current consumption	LED/edge	VB/L=4.2V	-	200	-	mA	
	LED/white	VB/L=3.5V	-	160	-	mA	

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED, EL Backlight feature, other Specs not available on catalog is under request.

