



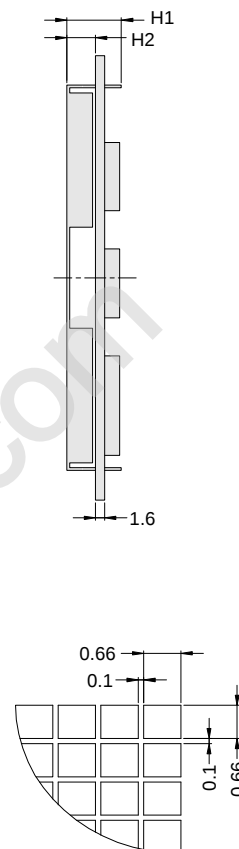

OUTLINE DIMENSIONS & BLOCK DIAGRAM

液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

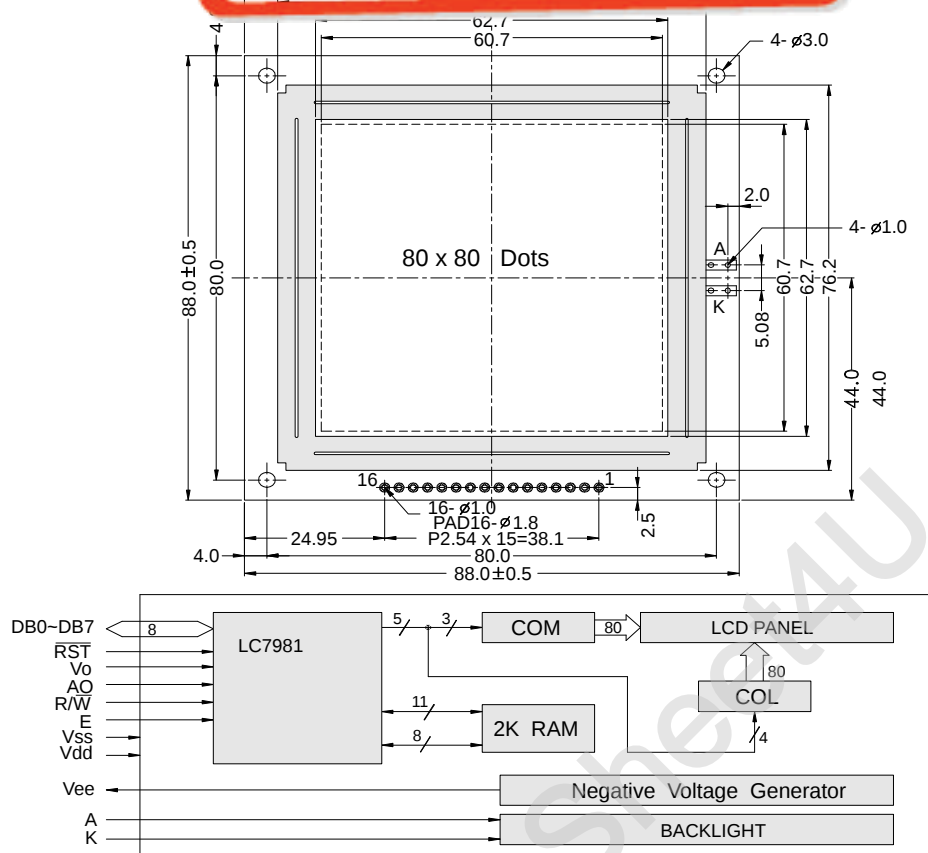

The tolerance unless classified $\pm 0.3\text{mm}$

MECHANICAL SPECIFICATION

Overall Size	88.0 x 88.0	Module	H2 / H1
View Area	62.7 x 62.7	W / O B/L	5.1 / 9.7
Dot Size	0.66 x 0.66	EL B/L	5.1 / 9.7
Dot Pitch	0.76 x 0.76	LED B/L	- / -

PIN ASSIGNMENT

Pin no.	Symbol	Function
1	Vss	Power supply(GND)
2	Vdd	Power supply(+)
3	Vo	Contrast Adjust
4	Ao	Command / data select
5	R/W	Data read / write
6	E	Enable signal
7	DB0	Data bus line
8	DB1	Data bus line
9	DB2	Data bus line
10	DB3	Data bus line
11	DB4	Data bus line
12	DB5	Data bus line
13	DB6	Data bus line
14	DB7	Data bus line
15	Vee	Negative voltage
16	RST	Reset

ABSOLUTE MAXIMUM RATING

Item	Symbol	Condition	Min.	Max.	Units
Supply for logic voltage	Vdd-Vss	25°C	-0.3	7.0	V
LCD driving supply voltage	Vdd-Vee	25°C	-0.3	16.5	V
Input voltage	Vin	25°C	-0.3	Vdd+0.3	V

ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min.	Typical	Max.	Units
Power supply voltage	Vdd-Vss	25°C	4.5	—	5.5	V
LCD operation voltage	Vop	Top	N	W	N	W
		-20°C	—	—	—	—
		0°C	9.7	9.3	10.2	10.4
		25°C	8.9	8	9.4	9.9
		40°C	8.6	—	9.1	—
LCD operation voltage	Vop	70°C	—	7.5	7.9	8.3
		70°C	—	7.5	7.9	8.3
LCM current consumption (No B/L)	Idd	Vdd=5V	—	2.8	4	mA
Backlight current consumption	LED/edge	VB/L=4.2V	—	—	—	mA
	LED/array	VB/L=4.2V	—	—	—	mA

REMARK

LCD option: STN, TN, FSTN

Backlight Option: LED, EL Backlight feature, other Specs not available on catalog is under request.