


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

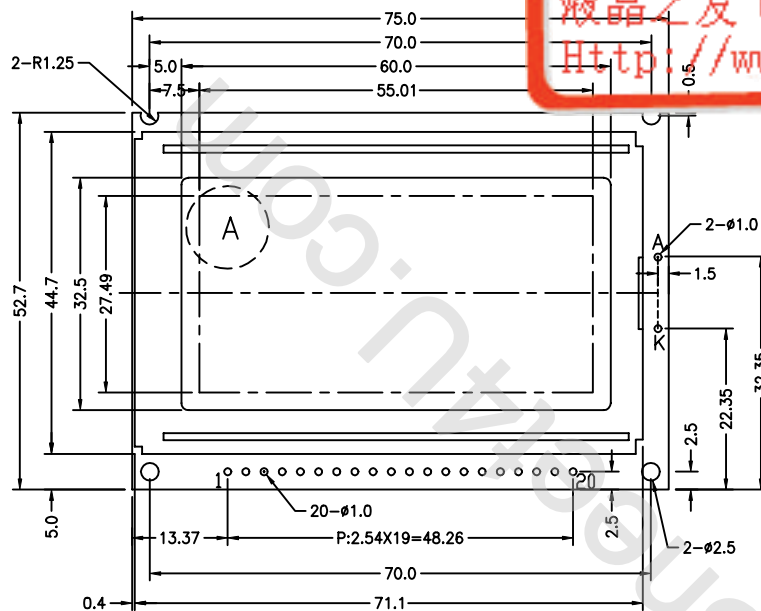


1	2	3	4	5	6	7	8	9	10
V _{DD}	V _{SS}	V _{EE}	DB0	DB1	DB2	DB3	DB4	DB5	DB6
11	12	13	14	15	16	17	18	19	20
DB7	CS1	CS2	RST	R/W	D/I	E	F _{GND}	A	K

NOTES:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/64 DUTY 1/9 BIAS
5. LCD OPERATING VOTAGE: 12.0V
6. OPERATING TEMP: 0°C~+50°C
7. STORAGE TEMP: -20°C~+60°C
8. CONTROLLER: HD61202UTE
9. BACKLIGHT: LED
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: ±0.3mm

DETAIL A:

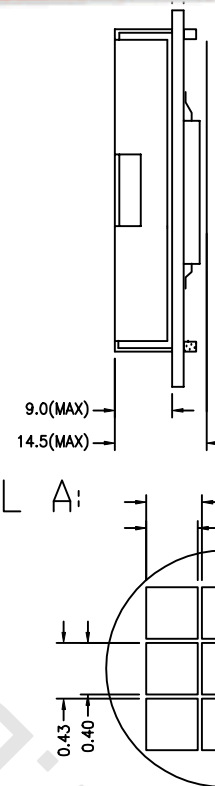

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM12864DBC	
CHECKED BY:	DWG NO: G-3	
APPROVED BY:	DWG NAME: TM12864DBC-3	
CONFIRMED BY:	SHEET NO: OF	