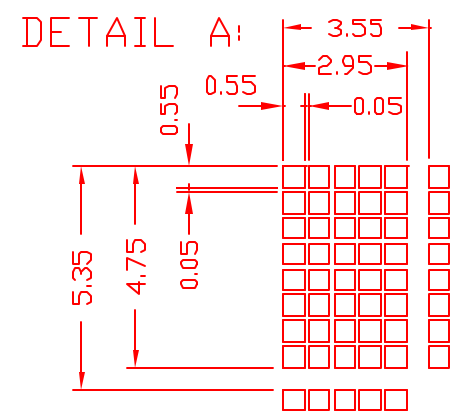
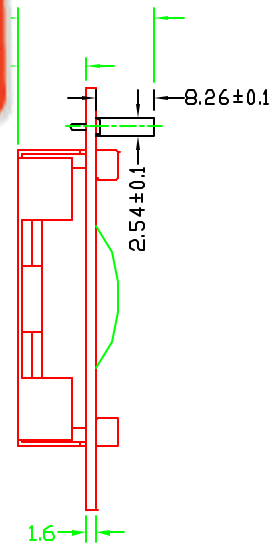
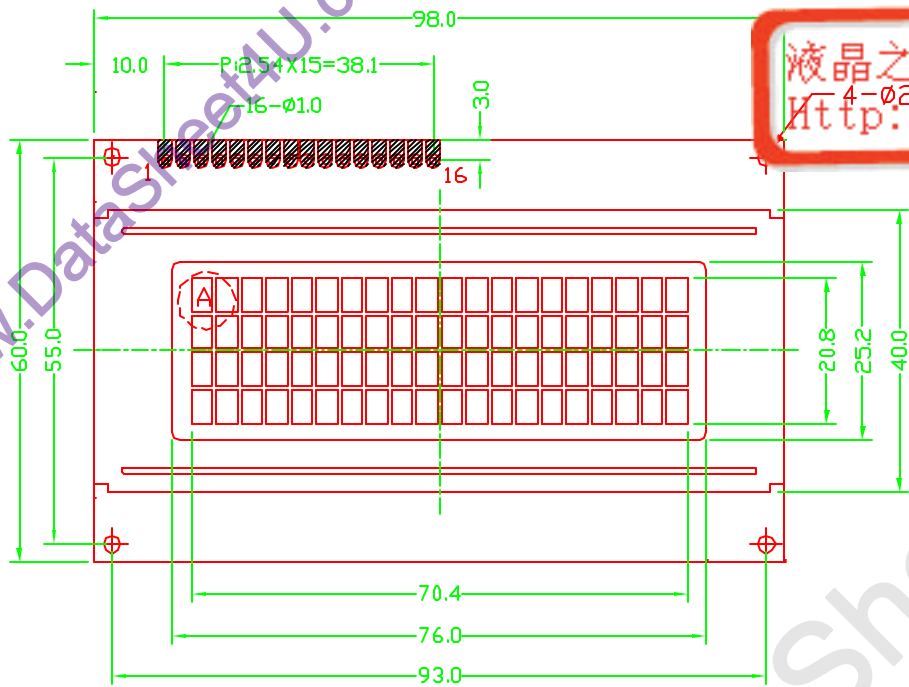




液晶之友 电话: 020-33819057
<http://www.lcdfriends.com>



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

- NOTES:
1. DISPLAY TYPE: STN/YELLOW MODE
 2. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 3. VIEWING DIRECTION: 6:00
 4. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
 5. LCD OPERATING VOLTAGE: 4.7V
 6. OPERATING TEMP: 0°C~+50°C
 7. STORAGE TEMP: -20°C~+60°C
 8. BACKLIGHT TYPE: LED
 9. CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
 10. CONNECTOR TYPE: 929974-01-16(3M)
 11. BEZEL IS TO BE PAINTED BLACK
 12. ALL UNMARKED TOLERANCE: ±0.3mm

 TIAN-MA MICROELECTRONICS CO. 6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China		
DRAWN BY:	CHECKED BY:	SCALE:
APPROVED BY:	DWG NO: G-1	UNIT: mm
CONFIRMED BY:	DWG NAME: TM204ABC8G-1	SHEET NO: 0F