



液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

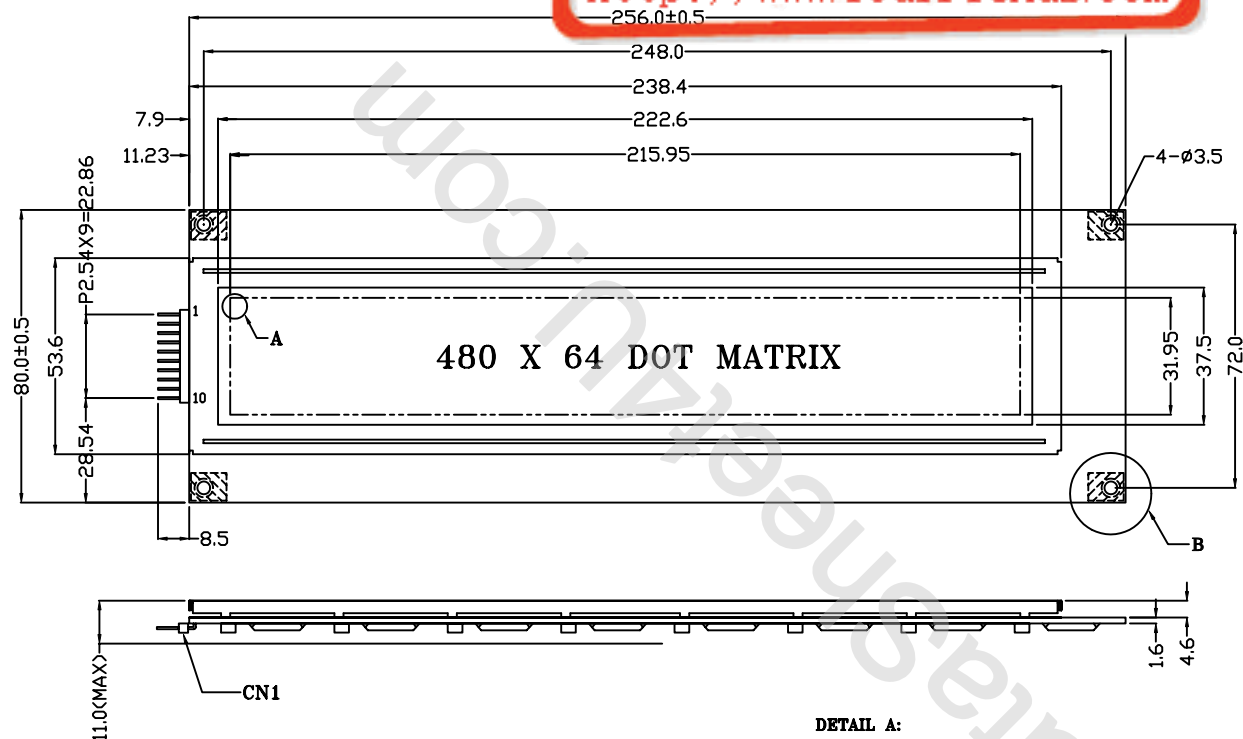


CN1 PIN ASSIGNMENT

1	D1
2	D2
3	FLM
4	M
5	CL1
6	CL2
7	VDD
8	VSS
9	VEE
10	F.G

DETAIL B:

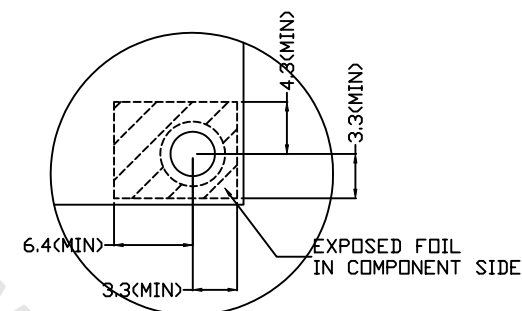

DETAIL A:




NOTES:

- 1.DISPLAY TYPE: STN/GRAY MODE
- 2.VIEW DIRECTON: 6:00
- 3.POLARIZER MODE: REFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C--+50°C
- 5.STORAGE TEMP: -20°C--+60°C
- 6.COM AND SEG DRIVER: S6B0086X01-Q0RJ
- 7.WITHOUT BACKLIGHT
- 8.ALL UNMARKED TOLERANCES: ±0.3mm
- 9.CONNECTOR: CN1 I/O PORT 10PIN
- 10.BEZEL COLOR: WHITE
- 11.LCD OPERATING VOLTAGE: 14.2V
- 12.DRIVE METHOD: BIAS=1/9 DUTY=1/64



TIAN-MA MICROELECTRONICS CO.

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM48064BDA	
CHECKED BY:		
APPROVED BY:		
CONFIRMED BY:	DWG NO: G-1	SCALE: UNIT: mm
	DWG NAME: TM48064BDAG-1	SHEET NO: OF