


SMD General Purpose Transistor (PNP)

Features

- PNP Silicon Epitaxial Planar Transistor for Switching and Amplifier Applications
- RoHS compliance



Mechanical Data

SOT-23



Case:	SOT-23, Plastic Package
Terminals:	Solderable per MIL-STD-202G, Method 208
Weight:	0.008 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	MMBT2907A	Unit	Conditions
	Marking Code	2F		
-V_{CEO}	Collector-Emitter Voltage (Open Base)	60	V	
-V_{CBO}	Collector-Base Voltage (Open Emitter)	60	V	
-V_{EBO}	Emitter-Base Voltage (Open Collector)	5.0	V	
-I_C	Collector Current (D.C)	600	mA	
P_{tot}	Power Dissipation above 25°C	250	mW	
f_T	Transition Frequency at f= 100MHz	200	MHz	-I _C =50mA, -V _{CE} =20V
R_{θj-a}	From junction to ambient in free air	500	K/W	
T_J	Junction Temperature	150	° C	
T_{STG}	Storage Temperature Range	-55 to +150	° C	

SMD General Purpose Transistor (PNP)

MMBT2907A

Electrical Characteristics ($T_{Ambient}=25^{\circ}\text{C}$ unless noted otherwise)


Symbol	Description	Min.	Max.	Unit	Conditions
hFE	D.C. Current Gain	75	-		-VCE=10V, -IC=0.1mA
		100	-		-VCE=10V, -IC=1mA
		100			-VCE=10V, -IC=10mA
		100	300		-VCE=10V, -IC=150mA
		50	-		-VCE=10V, -IC=500mA
-ICBO	Collector Cut–Off Current	-	10	nA	-VCB=50V, IE=0
-ICEX		-	10	μA	-VCB=50V, IE=0, Tj=125° C
-IBEX	Base Current with Reverse Biased Emitter Junction	-	50	nA	-VEB=0.5V, -VCE=30V
-VCEsat	Collector-Emitter Saturation Voltage	-	0.4	V	-IC=150mA, -IB=15mA
		-	1.6		-IC=500mA, -IB=50mA
-VBEsat	Base-Emitter Saturation Voltage	-	1.3	V	-IC=150mA, -IB=15mA
		-	2.6		-IC=500mA, -IB=50mA
-V(BR)CEO	Collector-Emitter Breakdown Voltage	60	-	V	-IC=10mA, IB=0
-V(BR)CBO	Collector-Base Breakdown Voltage	60	-	V	-IC=10μA, IE=0
-V(BR)EBO	Emitter-Base Breakdown Voltage	5.0	-	V	-IE=10μA, IC=0
fT	Current Gain-Bandwidth Product	200	-	MHz	-VCE=20V, -IC=50mA, f=100MHz
Co	Output Capacitance	-	8.0	pF	-VCB=10V, f=1.0MHz, IE=0
Ci	Input Capacitance	-	30	pF	-VEB=2.0V, f=1.0MHz, IC=0
ton	Turn on Time	-	45	ns	-IB=15mA -IC=150mA -VCC=30V
td	Delay Time	-	10		
tr	Rise Time	-	40		
toff	Turn-Off Time (ts + tf)	-	100	ns	-IB=15mA -IC=150mA -VCC=6V
ts	Storage Time	-	80		
tf	Fall Time	-	30		

SMD General Purpose Transistor (PNP)

MMBT2907A

Dimensions in mm

SOT-23

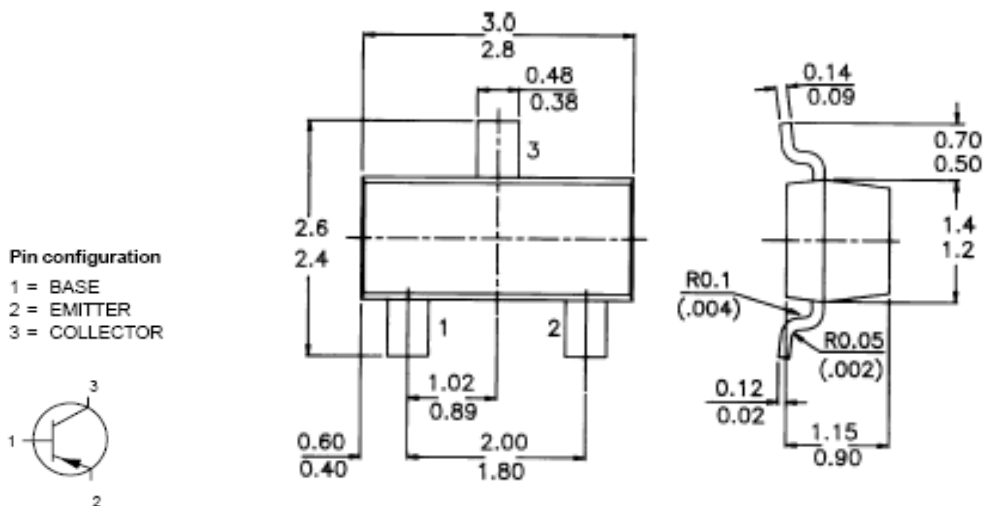

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931