

## Features

- 1.5 dB Noise Figure
- 32 dBm Output IP3
- Single +2.5 V Bias
- Lead-Free SC70 6-Lead (SOT-363) Package
- Halogen-Free “Green” Mold Compound
- RoHS\* Compliant and 260°C Reflow Compatible

## Description

The MAAL-011119 is a broadband gain block GaAs MMIC amplifier assembled in a lead-free SC70-6LD (SOT-363) surface mount plastic package. The topology is a monolithic single stage self-biased design featuring a convenient 50  $\Omega$  input/output impedance that minimizes the number of external components.


The MAAL-011119 is fabricated on MACOM’s pHEMT process to help realize the complementary high IP3 and low noise figure. This process features full passivation for performance and reliability.

## Ordering Information<sup>1,2</sup>

Part Number	Package
MAAL-011119-TR3000	3000 piece reel
MAAL-011119-001SMB	Sample Board

1. Reference Application Note M513 for reel size information.
2. All sample boards include 5 loose parts.

## Functional Schematic

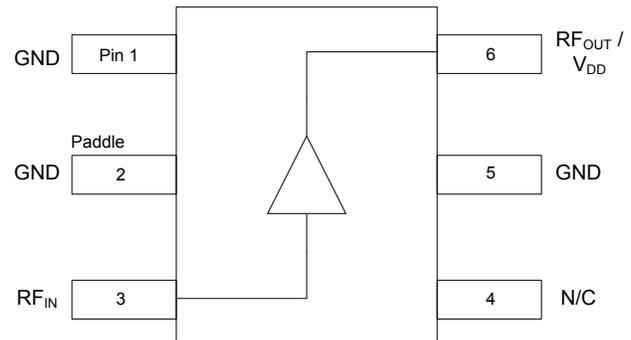

## Pin Configuration<sup>3</sup>

Pin No.	Function	Description
1	GND	Ground
2	GND	Ground
3	RF <sub>IN</sub>	RF Input
4	N/C	No Connection
5	GND	Ground
6 <sup>4</sup>	RF <sub>OUT</sub> /V <sub>DD</sub>	RF Output / Drain Voltage

3. MACOM recommends connecting unused package pins to ground.
4. MACOM recommends connecting a series inductor and shunt capacitor to pin 6; reference schematic on page 3.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

**Electrical Specifications:  $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 2.5\text{ V}$ ,  $Z_0 = 50\ \Omega$**

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Gain	1900 MHz	dB	9.4	10.5	12.0
	2150 MHz		—	10.0	—
Noise Figure	1900 MHz	dB	—	1.5	2.1
	2150 MHz		—	1.4	—
Input Return Loss	1900 MHz	dB	—	7	—
	2150 MHz		—	14	—
Output Return Loss	1900 MHz	dB	—	20	—
	2150 MHz		—	20	—
Output P1dB	950-2150 MHz	dBm	—	16	—
Output IP3	950-2150 MHz	dBm	—	32	—
Current	—	mA	60	80	100

### Absolute Maximum Ratings<sup>5,6</sup>

Parameter	Absolute Maximum
Gain Compression	6 dB
Voltage	5.5 V
Junction Temperature <sup>7,8</sup>	+150°C
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation near these survivability limits.
7. Operating at nominal conditions with  $T_J \leq +150^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.
8. Junction Temperature ( $T_J$ ) =  $T_C + \Theta_{JC} * (V * I)$   
 Typical thermal resistance ( $\Theta_{JC}$ ) = 131°C/W
  - a) For  $T_C = 25^\circ\text{C}$ ,  
 $T_J = 58^\circ\text{C}$  @ 2.5 V, 100 mA
  - b) For  $T_C = 85^\circ\text{C}$ ,  
 $T_J = 118^\circ\text{C}$  @ 2.5 V, 100 mA

### Handling Procedures

Please observe the following precautions to avoid damage:


### Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM class 1A devices.


## Satellite TV Amplifier 900 - 2200 MHz

Rev. V2

### PCB Layout

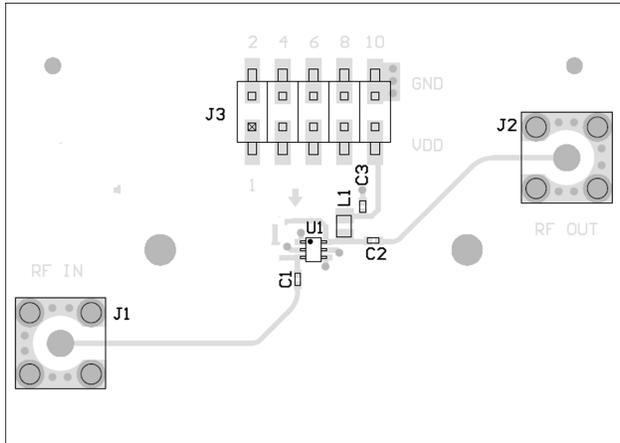


### Schematic

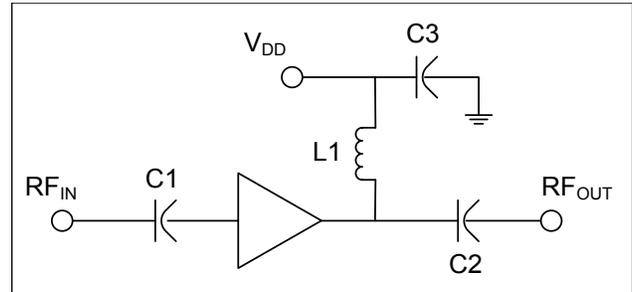

### Parts List

Part	Value	Case Style
C1	39 pF	0402
C2	39 pF	0402
C3	470 pF	0402
L1	12 nH	0402


### Lead-Free SC-70 6-Lead (SOT-363)<sup>†</sup>

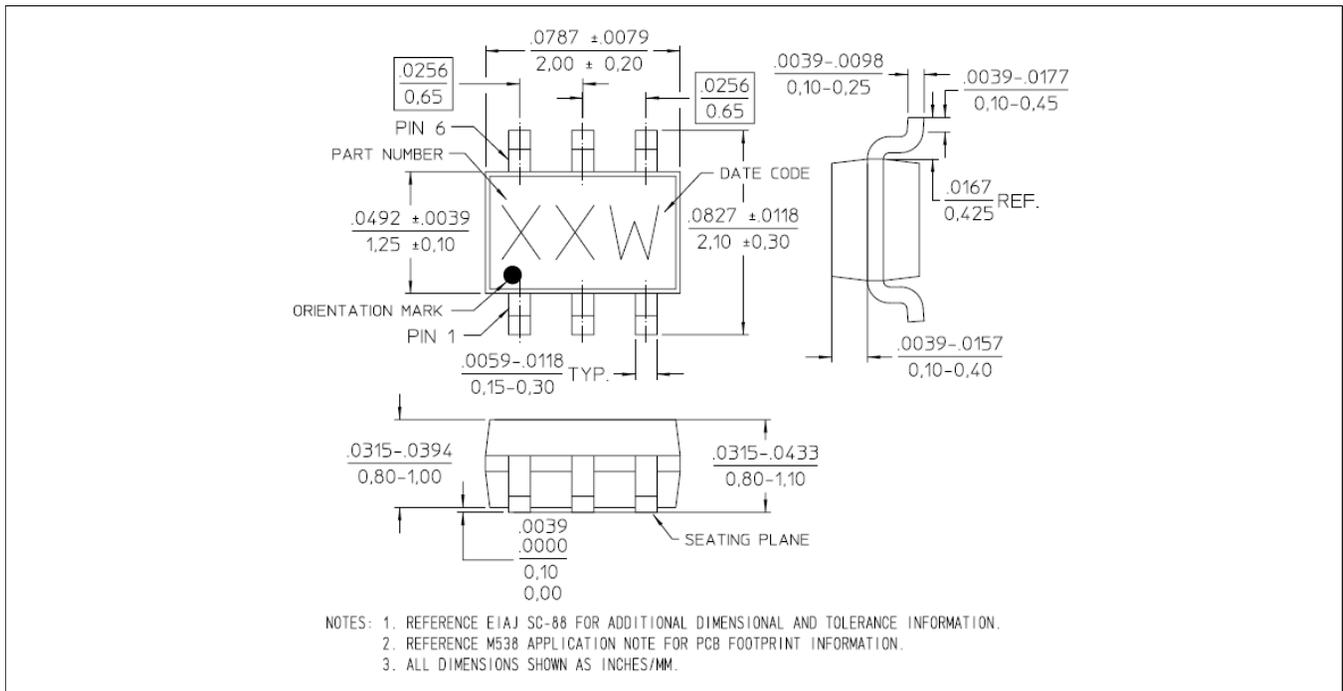


<sup>†</sup> Reference Application Note M538 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is matte tin over copper.

**Typical Performance Curves with  $V_{DD} = 2.5\text{ V}$**


**Gain**

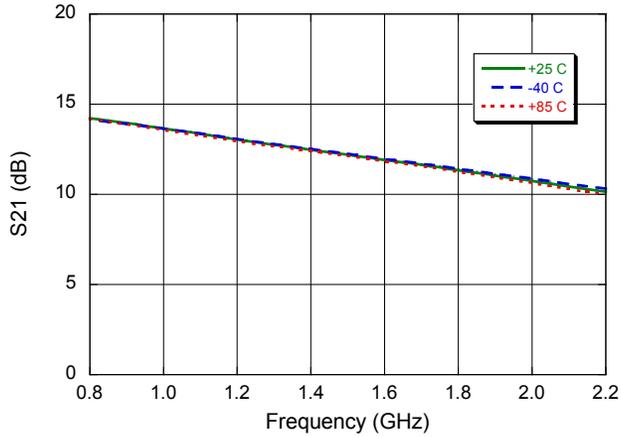


**Noise Figure**

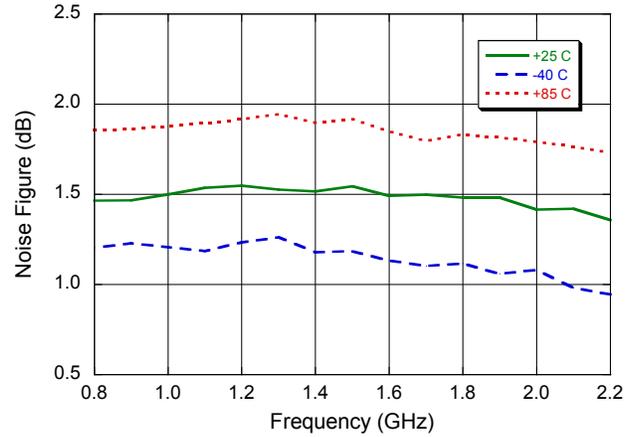

**Input Return Loss**

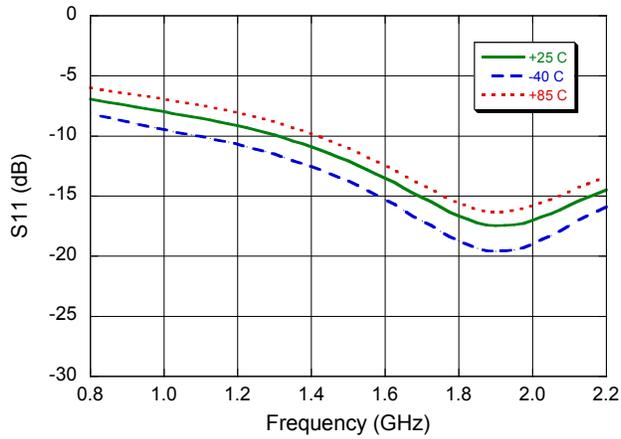


**Output Return Loss**

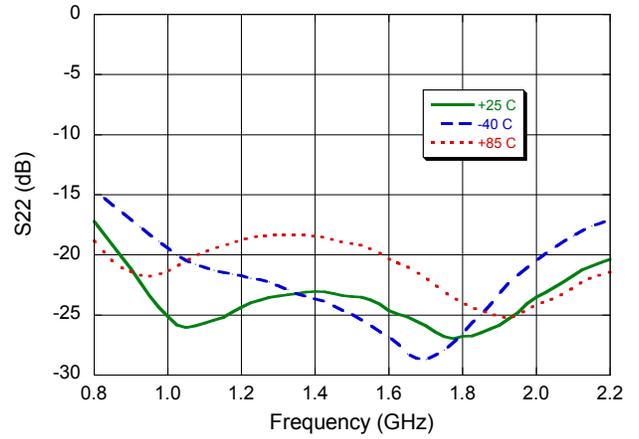


**Typical Performance Curves with  $V_{DD} = 2.5\text{ V}$**


**P1dB**

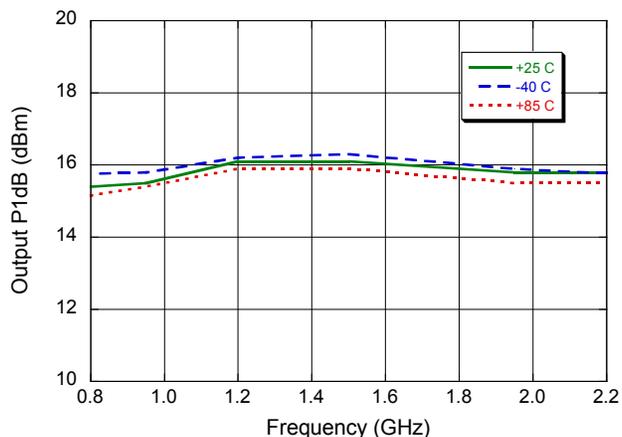

**Output IP3 @ -12 dBm Input Power**

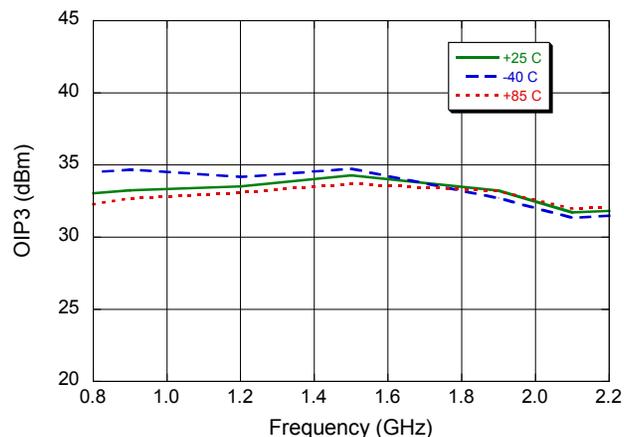


**Current vs. Temperature**

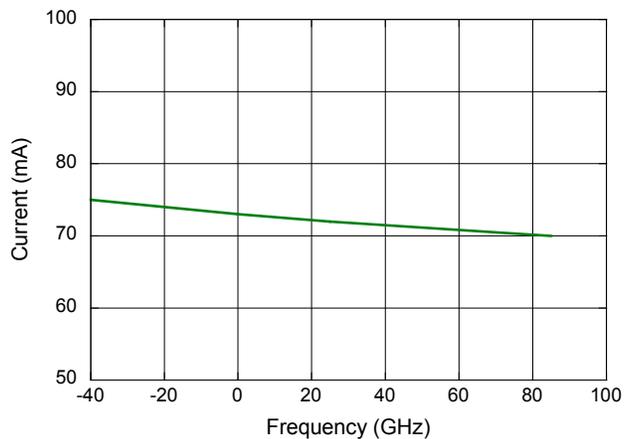


## Feedback Circuit Application Section

The feedback circuit allows for the gain to be reduced at the low end of the frequency band providing a flatter gain response. The feedback components presented in the parts list below contributed to the results shown on Sheet 7.

### PCB Layout

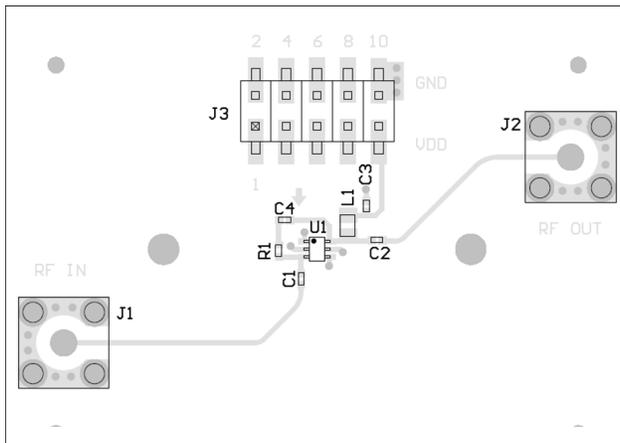

### Schematic

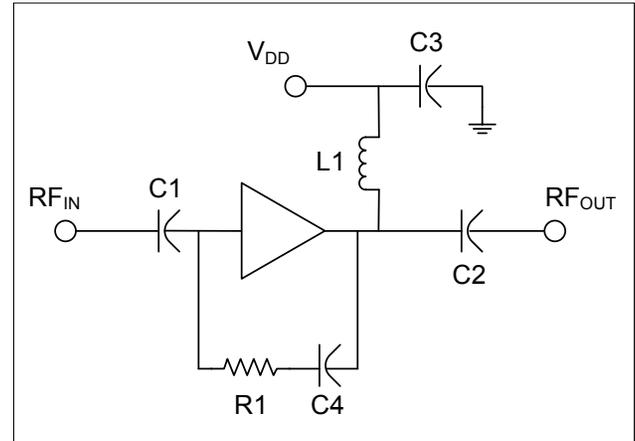


### Parts List


Part	Value	Case Style
C1	39 pF	0402
C2	39 pF	0402
C3	470 pF	0402
C4	68 pF	0402
L1	12 nH	0402
R1	450 Ω	0402

## Feedback Circuit Application Section Performance Curves


**Gain**

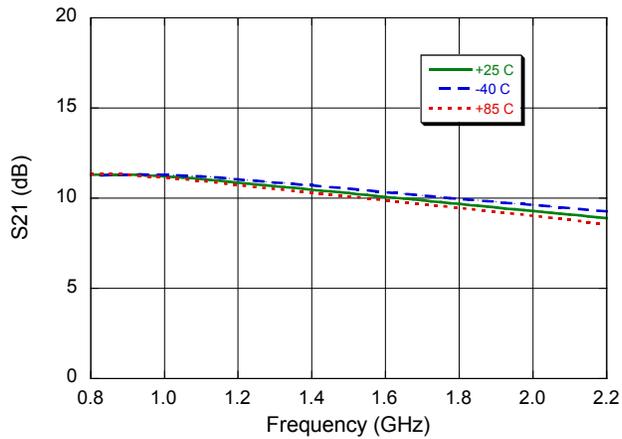


**Noise Figure**

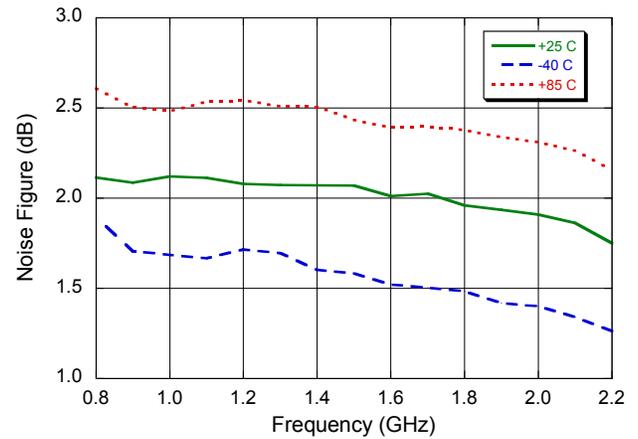


**Input Return Loss**

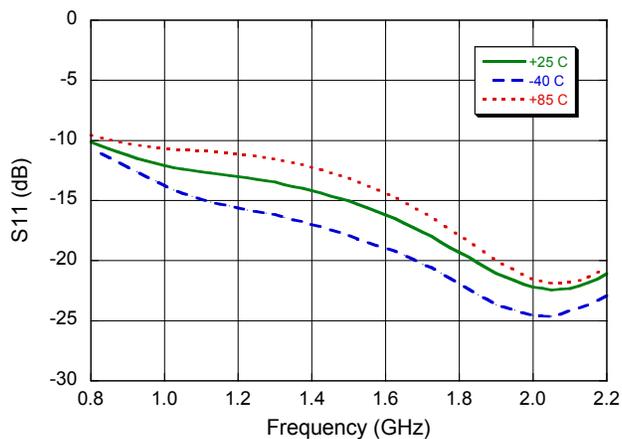


**Output Return Loss**

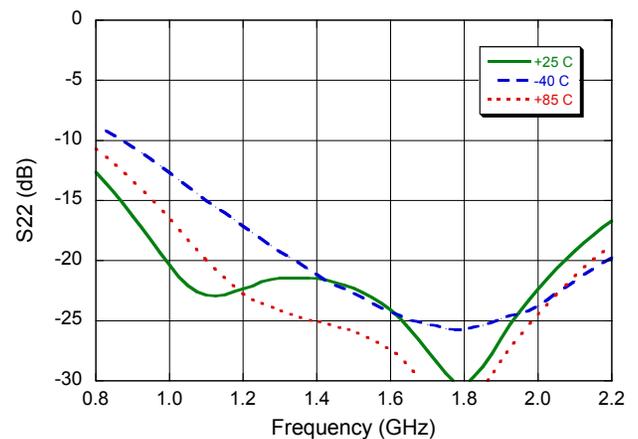

**P1dB**

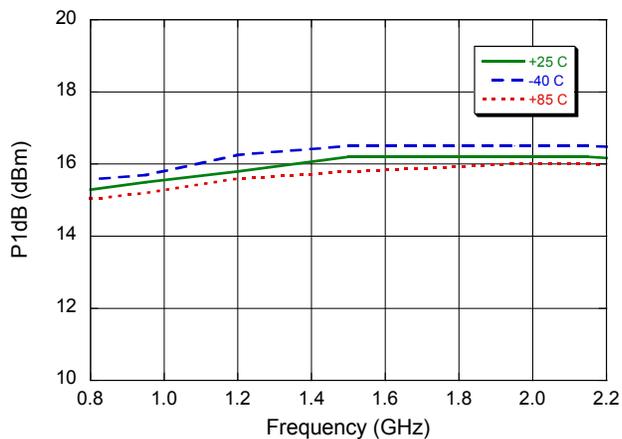

**Output IP3 @ -12 dBm Input Power**

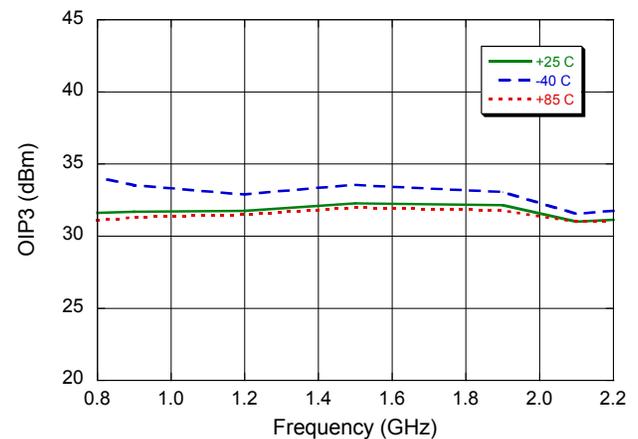

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.