
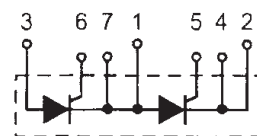



TIRISTORI TIR


TIRISTORSKI MODULI

Tip	Cena	U_{DRM}	I_{TAV}	I_{TSM}	I_{GT}	U_{GT}	Case
		U_{PRM} (V)	(A)	(KA)	(mA)	(V)	
MTT25	85,00	600	25	0,9	150	3	TO240
SKKT26	96,00	600	26	0,9	150	3	TO240
SKKT56	136,00	800	56	1,35	150	3	TO240
MCC44-12I01B	158,00	1200	80	1,8	150	3	TO240
MCC56-12I08B	176,00	1200	100	3,2	150	3	TO240
MCC95-08I08B	228,00	800	180	6,0	150	3	TO240


U_{DRM} - probojni napon neprovođenog stanja, U_{RRM} - probojna vrednost reverznog napona, I_{TAV} - poprečna struja provođenja, I_{TSM} - udarna struja provođenja, I_{GT} - struja okidanja gejta, U_{GT} - napon okidanja gejta

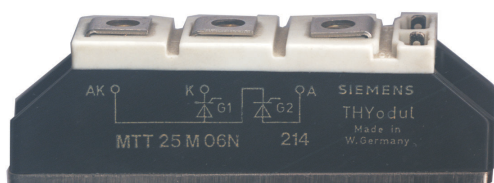

MCC44I01B

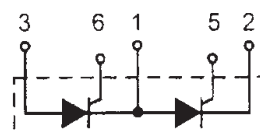


MCC56I08B MCC95I08B

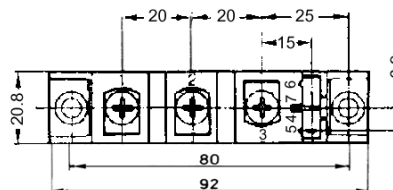


TITRISTORSKO-DIODNI MODUL

Tip	Cena	U_{DRM}	I_{TAV}	I_{TSM}	I_{GT}	U_{GT}	Case
		U_{PRM} (V)	(A)	(KA)	(mA)	(V)	
MCD26-08I08B	98,00	800	50	1,35	150	3	TO240

U_{DRM} - probojni napon neprovođenog stanja, U_{RRM} - probojna vrednost reverznog napona, I_{TAV} - poprečna struja provođenja, I_{TSM} - udarna struja provođenja, I_{GT} - struja okidanja gejta, U_{GT} - napon okidanja gejta

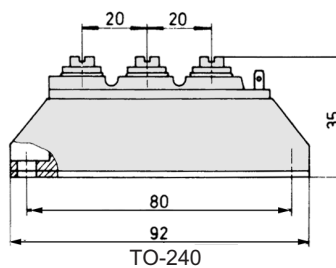

TO-240

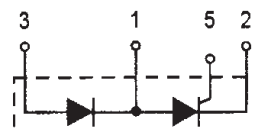

MCD26I08B