

Small kVA 3 Phase Isolation Transformer**TT2039-TT2045**

VA:	350, 500, 750, 1000, 1500 2000, 3000	Phase:	Three-Phase
Input Voltage:	400 Delta	Frequency:	50 Hz
Output Voltage:	480Y/277	BIL:	4 kV
Taps:	See wiring diagram	Coils:	Copper
Insulation Class:	Class F 155° C	Temp Rise:	100° C
Impedance:	2.5 - 3.5%		

Open Enclosure

10 Full 10 Year Warranty**Feature Highlights**

10 Year Warranty
UL Listed
CSA Approved

- Copper windings
- 1.5 to 2 week build time
- Solidly fixed terminals with standard combination slotted Robertson head screw connections facilitate wiring.
- Built with heat-proof insulation for compact size and long life.
- Unique bobbin-wound coils for greater efficiency, superior heat evacuation, and compact structure.

Optional Features

- NEMA 4/4x
- Encapsulation
- Other voltages/multiple tap
- Electrostatic shield

Please call us for additional options.


Small kVA 3 Phase Isolation Transformer

TT2039-TT2045

60 Hz


TT2039	350 VA
TT2040	500 VA
TT2041	750 VA
TT2042	1000 VA
TT2043	1500 VA
TT2044	2000 VA
TT2045	3000 VA

Wiring Connection		
Pri. Volts	Connect Taps	Line Leads
400	1- X1 & 2- X2 & 3 - X3	X1, X2, X3
Sec. Volts	Connect Taps	Line Leads
480 (277)	1- H1 & 2- H2 & 3 - H3	H1, H2, H3(H0)

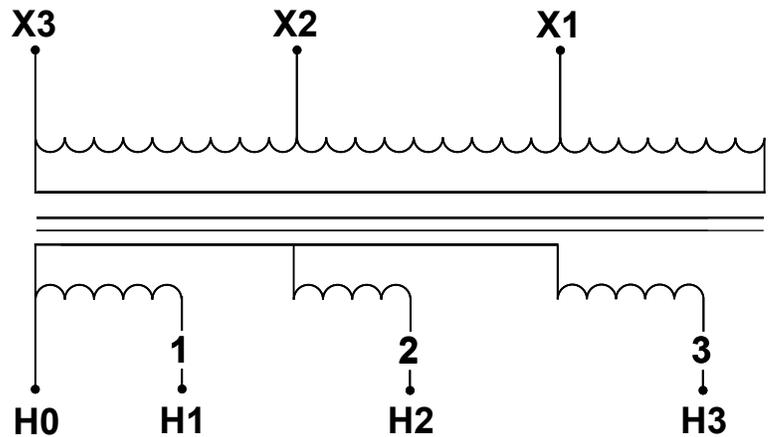

Small kVA 3 Phase Isolation Transformer

TT2039-TT2045

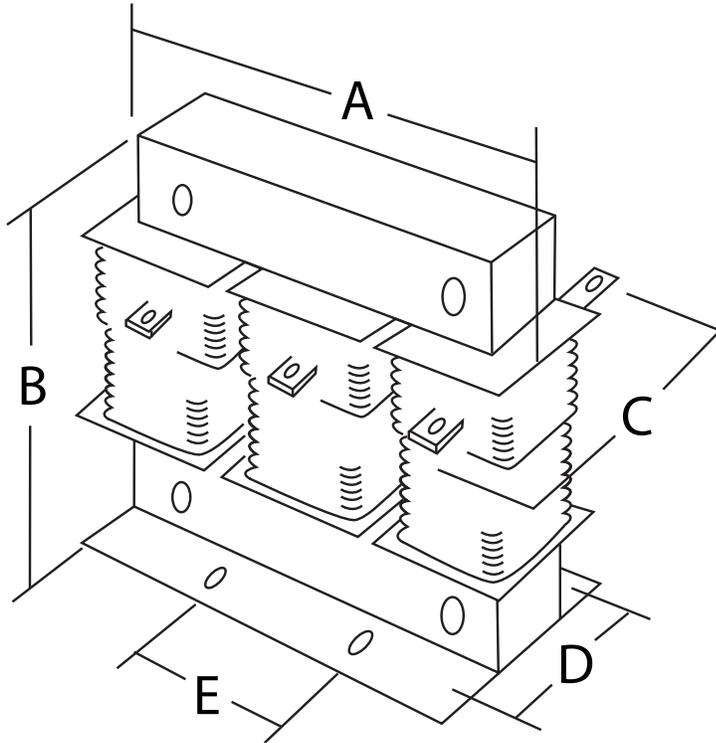

Open Units - Dimension Table

Part # (60 Hz)	VA	A	B	C	D	E	Mounting Holes	Ship Weight (lbs)
TT2039	350	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	12
TT2040	500	7.2	5.4	3.6	2.58	2.4	0.28 x 0.56	14
TT2041	750	9	6.75	3.9	2.75	3	0.35 x 0.788	23
TT2042	1000	9	6.75	4.1	2.75	3	0.35 x 0.788	26
TT2043	1500	9	6.75	5.4	4.25	3	0.35 x 0.788	40
TT2044	2000	9	6.75	5.55	4.25	3	0.35 x 0.788	46
TT2045	3000	9	6.75	6	4.25	3	0.35 x 0.788	55

Approximate dimensions given in inches.

Note: All dimensions are +/- 0.06 in. except for "C," which is +/- 0.25 in.