


isc Triacs
BTB04 T/D/S/A
FEATURES

- With TO-220AB non insulated package
- Suitable for general purpose applications where gate high sensitivity is required. Application on 4Q such as phase control and static switching.
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

SYMBOL	PARAMETER	MIN	UNIT
$I_{T(RMS)}$	RMS on-state current (full sine wave) $T_j=95^\circ\text{C}$	4	A
I_{TSM}	Non-repetitive peak on-state current $t_p=10\text{ms}$	40	A
T_j	Operating junction temperature	110	°C
T_{stg}	Storage temperature	-45~150	°C
$R_{th(j-c)}$	Thermal resistance, junction to case	3.2	°C/W
$R_{th(j-a)}$	Thermal resistance, junction to ambient	60	°C/W

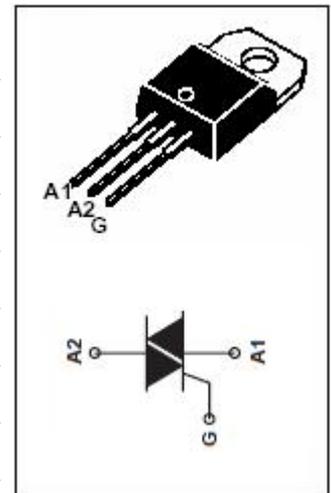

SYMBOL	PARAMETER	400T/D/S/A	600T/D/S/A	700T/D/S/A	UNIT
V_{DRM}	Repetitive peak off-state voltage	400	600	700	V
V_{RRM}	Repetitive peak reverse voltage	400	600	700	V

ELECTRICAL CHARACTERISTICS (Tc=25°C unless otherwise specified)

SYMBOL	PARAMETER	CONDITIONS	MAX				UNIT	
I_{RRM}	Repetitive peak reverse current	$V_R=V_{RRM}$, $V_R=V_{RRM}$, $T_j=110^\circ\text{C}$	0.01 0.75				mA	
I_{DRM}	Repetitive peak off-state current	$V_D=V_{DRM}$, $V_D=V_{DRM}$, $T_j=110^\circ\text{C}$	0.01 0.75				mA	
I_{GT}	Gate trigger current	$V_D=12\text{V}$; $R_L=33\ \Omega$	I - II - III	T	D	S	A	mA
				5	5	10	10	
			IV	5	10	10	25	
I_H	Holding current	$I_{GT}=0.1\text{A}$, Gate Open	15	15	25	25	mA	
V_{GT}	Gate trigger voltage all quadrant	$V_D=12\text{V}$; $R_L=30\ \Omega$	1.5				V	
V_{TM}	On-state voltage	$I_T=5\text{A}$	1.65				V	

isc Triacs**BTB04 T/D/S/A****NOTICE:**

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

