

ECC802S

A. F. twin triode with separate cathodes, non microphonic

Base: NOVAL

$$U_f = 6,3 \text{ V}/12,6 \text{ V}$$

$$I_f = \text{ca. } 300/150 \text{ mA}$$

Typical characteristic:

$$U_a = 250 \text{ V}$$

$$R_k = 800 \Omega$$

$$I_a = 10,5 \text{ mA}$$

$$S = 2,2 \text{ mA/V}$$

$$R_i = 7,7 \text{ k}\Omega$$

$$\mu = 17$$

Limiting values:

$$U_a = 330 \text{ V}$$

$$W_a = 3 \text{ W}$$

$$I_k = 22 \text{ mA}$$

$$U_g = -55 \text{ V}$$

$$R_g = 1 \text{ M}\Omega$$

$$U_{k/f} = 100 \text{ V}$$

Capacitances:

system I.

$$C_{g/k} = 1,6$$

$$C_a = 0,5$$

$$C_{g/a} = 1,5$$

system II.

$$C_{g/k} = 1,6 \text{ pF}$$

$$C_a = 0,4 \text{ pF}$$

$$C_{g/a} = 1,5 \text{ pF}$$

NEW

Dimension and connections:

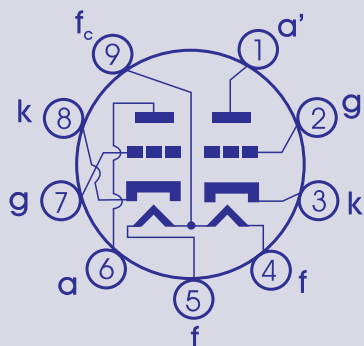
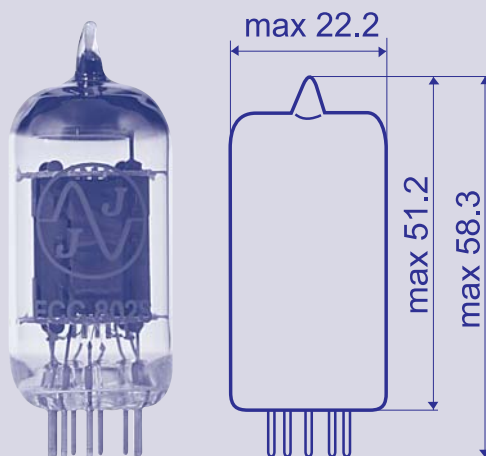
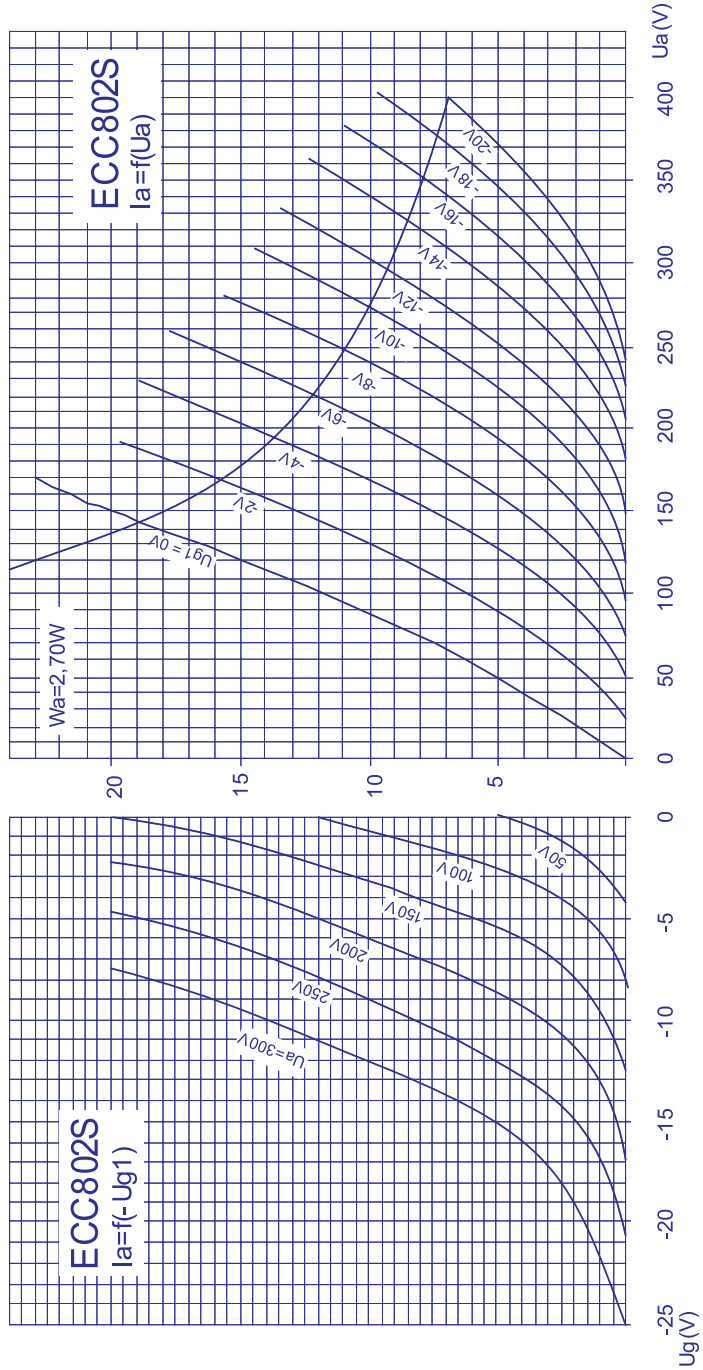




PLATE CHARACTERISTICS

 $I_a(\text{mA})$  $U_a(\text{V})$ $U_{g1}(\text{V})$

Excellence with every decibel

Excellence with every decibel

Excellence with every decibel