

SS1030

SCHOTTKY BARRIER DIODE

FEATURES


- General rectification
- Small power mold type (PMDU)
- Low I_R
- High reliability
- Silicon epitaxial planar
- In compliance with EU RoHS 2002/95/EC directives

APPLICATIONS

- Case: SOD-123 plastic
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx.Weight : 0.01 gram
- Marking : GS

SOD-123

Unit: inch (mm)

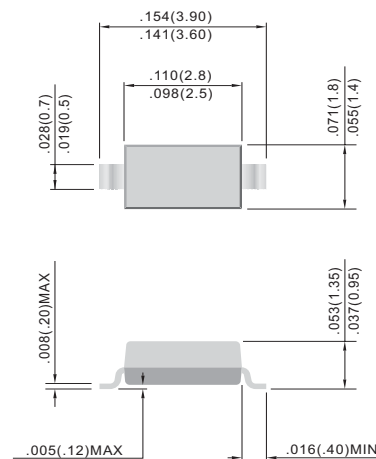

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}\text{C}$)







PARAMETER	SYMBOL	LIMITS	UNIT
Reverse Voltage (repetitive peak)	V_{RM}	30	V
Reverse Voltage (DC)	V_R	30	V
Average Rectified Forward Current	I_O	1	A
Forward Current Surge Peak (60Hz . 1cyc)	I_{FSM}	30	A
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-40 to 125 $^{\circ}\text{C}$	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Forward Voltage	V_{F1}	$I_F = 0.5\text{A}$	-	0.39	0.46	V
	V_{F2}	$I_F = 1.0\text{A}$	-	0.43	0.48	V
Reverse Current	I_{R1}	$V_R = 15\text{V}$	-	3.0	20	μA
	I_{R2}	$V_R = 30\text{V}$	-	9.0	50	μA

SS1030

●Electrical characteristic curves ($T_a=25^\circ\text{C}$)

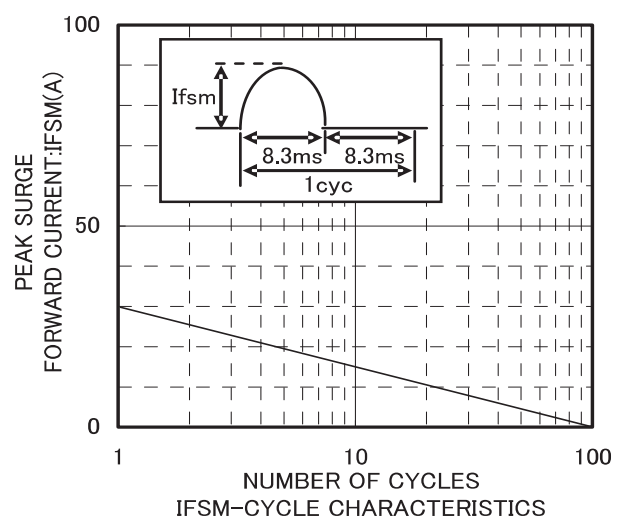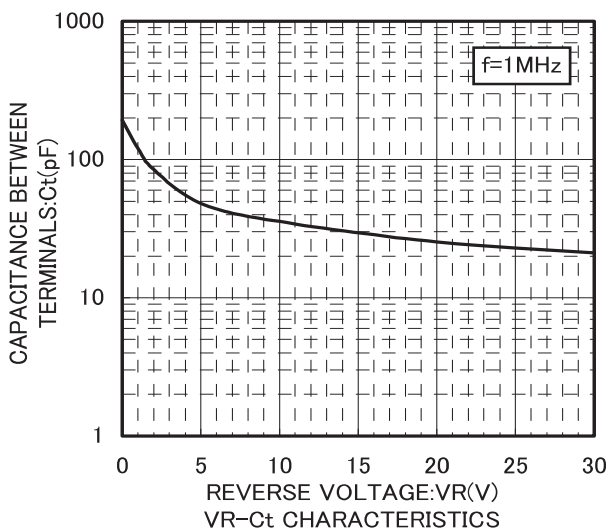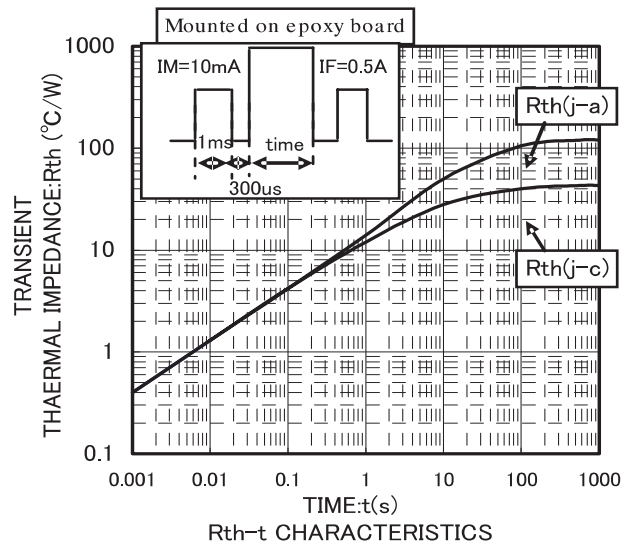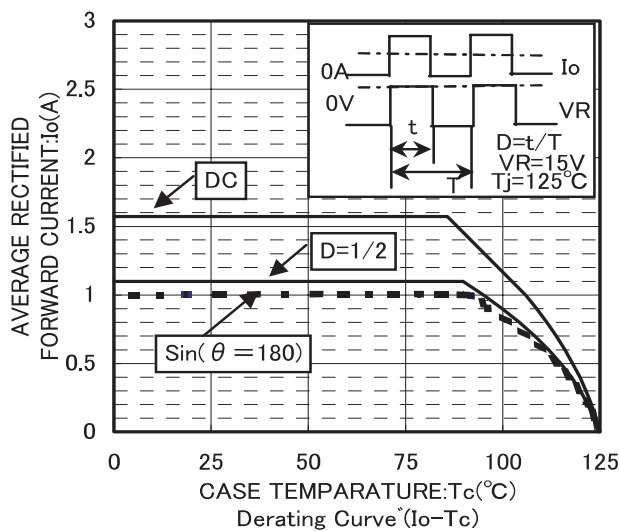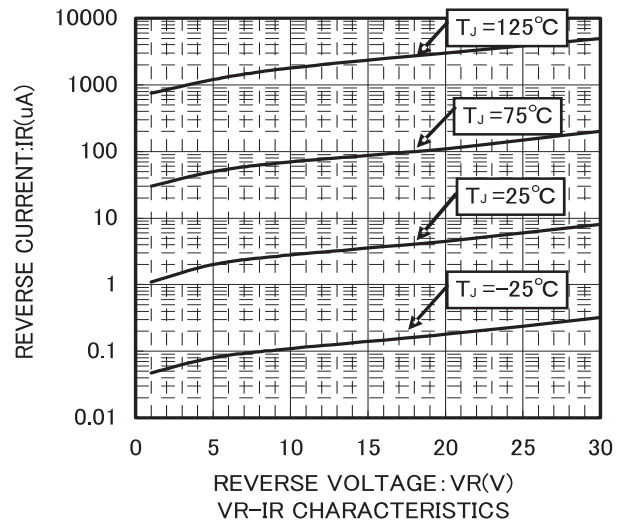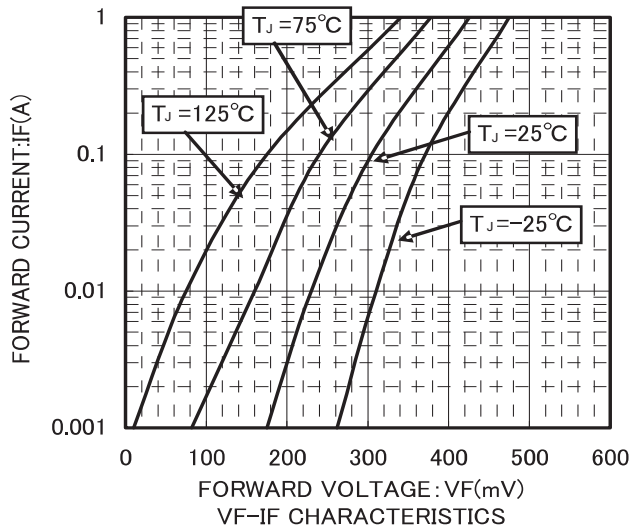


SS1030

MOUNTING PAD LAYOUT

SOD-123

Unit: inch (mm)

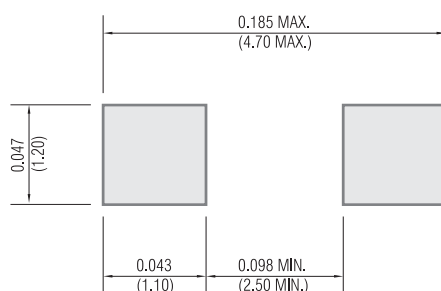

ORDER INFORMATION

- Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.