


Packages



3 pin SOT23 (suffix SO)

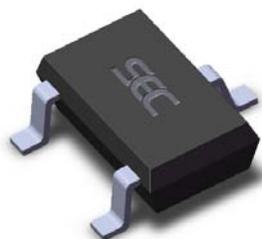


3 pin SIP (suffix UA)

Features and Benefits

- 4.5V to 24V Operation
- -40°C to 150°C Superior temperature operation
- Bipolar technology
- Open-collector 25 mA output
- Reverse battery protection
- Solid-state reliability
- Resistant to physical stress
- Small Size SOT23 3L or SIP 3L
- Activate with small, commercially available Permanent magnets

Functional Block Diagram

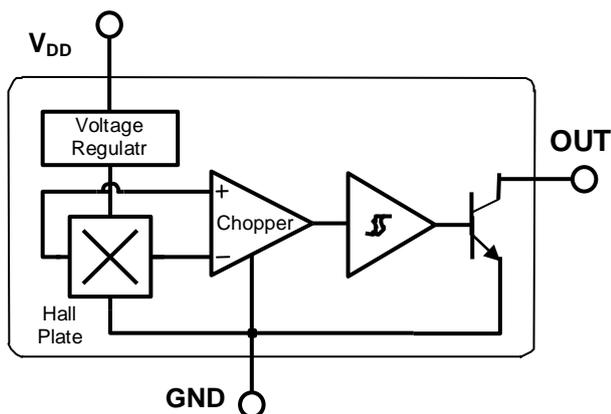

Application Examples

- Automotive, Consumer and Industrial
- Solid-state switch
- Brushless DC motor commutation
- Speed detection
- Angular position detection
- Linear position detection
- Proximity detection

General Description

The SS1072 is a unipolar Hall-effect sensor IC fabricated from bipolar technology. The device integrates a voltage regulator, reverse battery protection diode, Hall sensor with dynamic offset cancellation system, temperature compensation circuitry, small signal amplifier, Schmitt trigger and an open-collector output to sink up to 25 mA. With suitable output pull up, they can be used with bipolar or CMOS logic circuits

These Hall-effect switches are monolithic integrated circuits with tighter magnetic specifications, designed to operate continuously over extended temperatures to +150°C, and are more stable with both temperature and supply voltage changes. The unipolar switching characteristic makes these devices ideal for use with a simple bar or rod magnet.



Thanks to its wide operating voltage range and extended choice of temperature range, it is quite suitable for use in automotive, industrial and consumer applications.

The device is delivered in a Small Outline Transistor (SOT) and in a Plastic Single In Line (SIP 3L flat). Both 3-lead packages are RoHS compliant.

Glossary of Terms

| | |
|------------------------------|--|
| MilliTesla (mT), Gauss | Units of magnetic flux density: 1mT = 10 Gauss |
| RoHS | Restriction of Hazardous Substances |
| Operating Point (B_{OP}) | Magnetic flux density applied on the branded side of the package which turns the output driver ON ($V_{OUT} = V_{DSon}$) |
| Release Point (B_{RP}) | Magnetic flux density applied on the branded side of the package which turns the output driver OFF ($V_{OUT} = \text{high}$) |

Pin Definitions and Descriptions

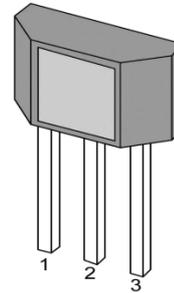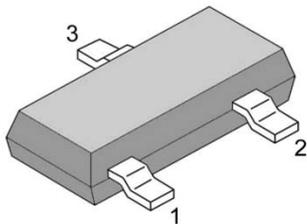

| SOT Pin № | SIP Pin № | Name | Type | Function |
|-----------|-----------|----------|--------|-----------------------|
| 1 | 1 | V_{DD} | Supply | Supply Voltage pin |
| 2 | 3 | OUT | Output | Open Drain Output pin |
| 3 | 2 | GND | Ground | Ground pin |

Absolute Maximum Ratings

| Parameter | Symbol | Value | Units |
|---------------------------|-----------|------------|-------|
| Supply Voltage | V_{DD} | 28 | V |
| Supply Current | I_{DD} | 50 | mA |
| Output Voltage | V_{OUT} | 28 | V |
| Output Current | I_{OUT} | 50 | mA |
| Storage Temperature Range | T_S | -65 to 170 | °C |

| Operating Temperature Range | Symbol | Value | Units |
|-----------------------------|--------|------------|-------|
| Temperature Suffix "E" | T_A | -40 to 85 | °C |
| Temperature Suffix "K" | T_A | -40 to 125 | °C |
| Temperature Suffix "L" | T_A | -40 to 150 | °C |

Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

General Electrical Specifications

DC Operating Parameters $T_A = 25^\circ\text{C}$, $V_{DD} = 4.5\text{V to } 24\text{V}$ (unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Units |
|---------------------------|------------|---|-----|------|-----|---------------|
| Supply Voltage | V_{DD} | Operating | 4.5 | | 24 | V |
| Supply Current | I_{DD} | $B < B_{RP}$ | 4 | 5 | 7 | mA |
| Output Saturation Voltage | V_{DSon} | $I_{OUT} = 20\text{mA}$, $B > B_{OP}$ | | 0.3 | 0.5 | V |
| Output Leakage Current | I_{OFF} | $B < B_{RP}$ $V_{OUT} = 24\text{V}$ | | 0.1 | 10 | μA |
| Output Rise Time | t_r | $R_L = 820\Omega$, $C_L = 20\text{pF}$ | | 0.04 | 2.0 | μs |
| Output Fall Time | t_f | $R_L = 820\Omega$, $C_L = 20\text{pF}$ | | 0.18 | 2.0 | μs |

Magnetic Specifications

DC Operating Parameters $V_{DD} = 4.5\text{V to } 24\text{V}$ (unless otherwise specified)



| Package | Parameter | Symbol | Test Conditions | Min | Typ | Max | Units |
|---------|-----------------|------------|---|------|------|------|-------|
| UA | Operating Point | B_{OP} | $T_A = 25^\circ\text{C}$, $V_{DD} = 12\text{V DC}$ | 160 | 180 | 200 | G |
| | Release Point | B_{RP} | | 110 | 140 | 170 | G |
| | Hysteresis | B_{HYST} | | | 40 | | G |
| SO | Operating Point | B_{OP} | $T_A = 25^\circ\text{C}$, $V_{DD} = 12\text{V DC}$ | -200 | -180 | -160 | G |
| | Release Point | B_{RP} | | -170 | -140 | -110 | G |
| | Hysteresis | B_{HYST} | | | 40 | | G |

Output Behavior versus Magnetic Pole


DC Operating Parameters $T_A = -40^\circ\text{C to } 150^\circ\text{C}$, $V_{DD} = 4.5\text{V to } 24\text{V}$ (unless otherwise specified)

| Test Conditions (UA) | Test Conditions (SO) | OUT |
|----------------------|----------------------|------|
| $B < B_{RP}$ | $B > B_{RP}$ | High |
| $B > B_{OP}$ | $B < B_{OP}$ | Low |

The SOT-23 device is reversed from the UA package. The SOT-23 output transistor will be turned on (drops low) in the presence of a sufficiently strong north pole magnetic field applied to the marked face.

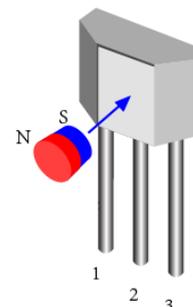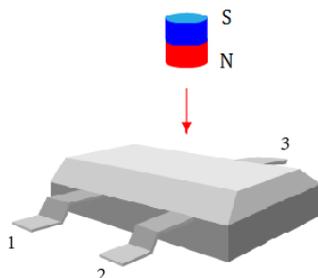


Application Information

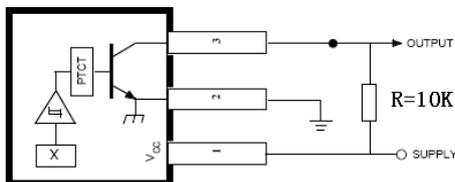

Package Information


Package UA, 3-Pin SIP:

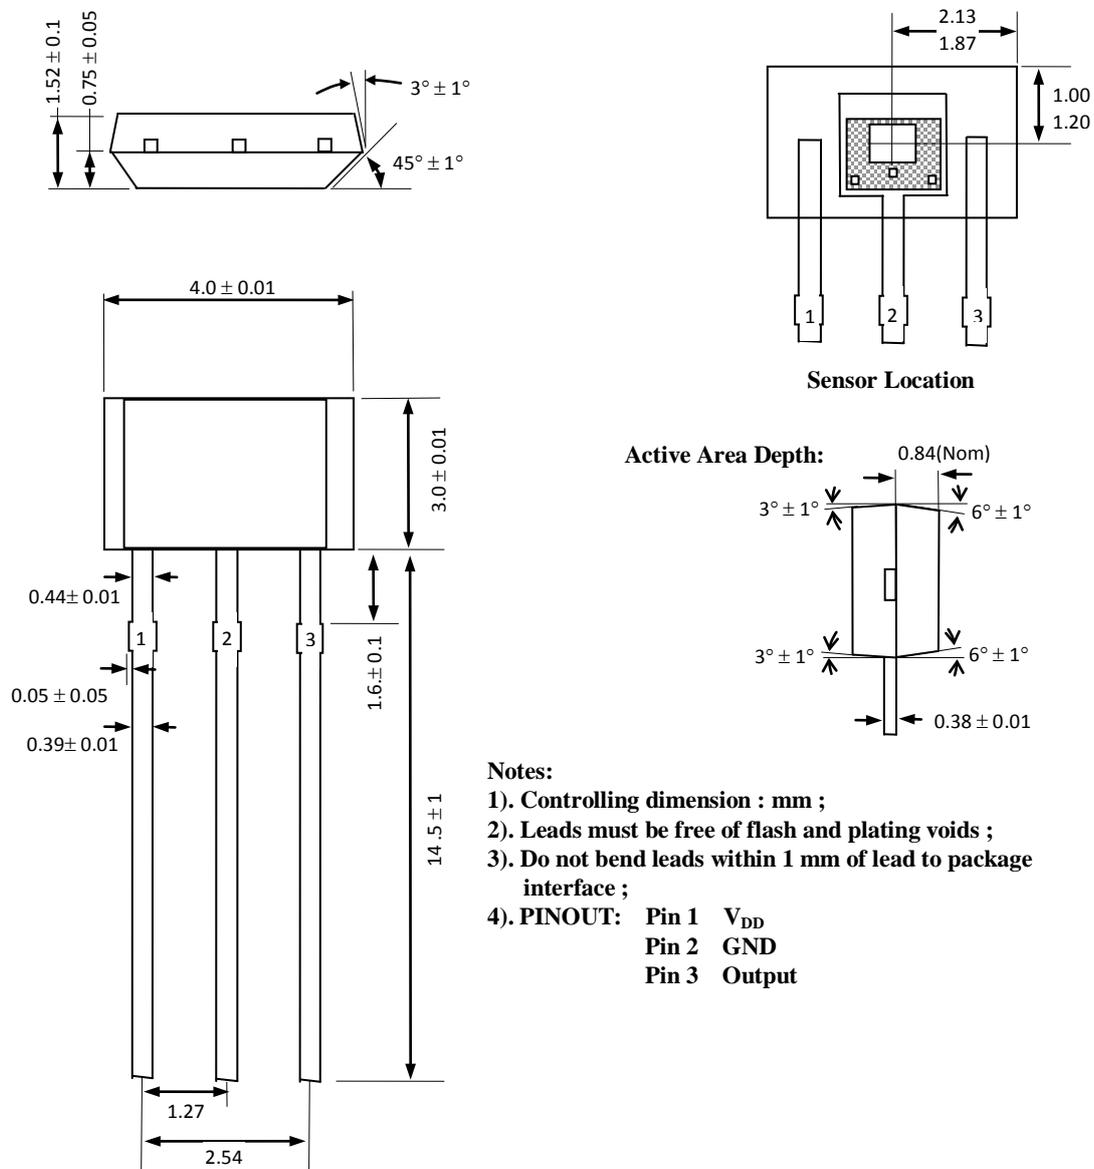

Notes:

- 1). Controlling dimension : mm ;
- 2). Leads must be free of flash and plating voids ;
- 3). Do not bend leads within 1 mm of lead to package interface ;
- 4). PINOUT: Pin 1 V_{DD}
Pin 2 GND
Pin 3 Output


Package SO in SOT-23:

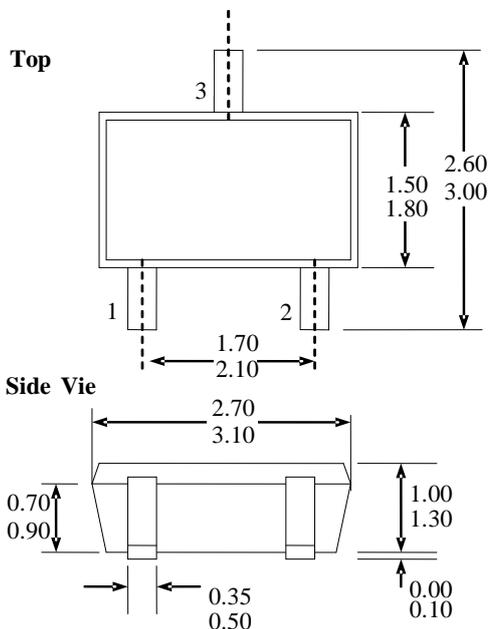

Notes

- 1). PINOUT: Pin 1 V_{DD}
Pin 2 Output
Pin 3 GND
- 2). All dimensions are in millimeters;

End

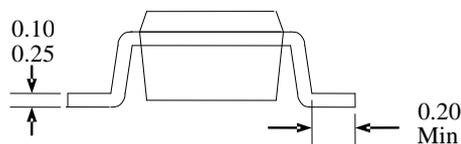

Ordering Information

| Part No. | Pb-free | Temperature Code | Package Code | Packing |
|------------|---------|------------------|--------------|------------------------------|
| SS1072ESOT | YES | -40°C to 85°C | SOT-23 | 7-in. reel, 3000 pieces/reel |
| SS1072EUA | YES | -40°C to 85°C | TO-92 | Bulk, 1000 pieces/bag |
| SS1072KSOT | YES | -40°C to 125°C | SOT-23 | 7-in. reel, 3000 pieces/reel |
| SS1072KUA | YES | -40°C to 125°C | TO-92 | Bulk, 1000 pieces/bag |
| SS1072LSOT | YES | -40°C to 150°C | SOT-23 | 7-in. reel, 3000 pieces/reel |
| SS1072LUA | YES | -40°C to 150°C | TO-92 | Bulk, 1000 pieces/bag |