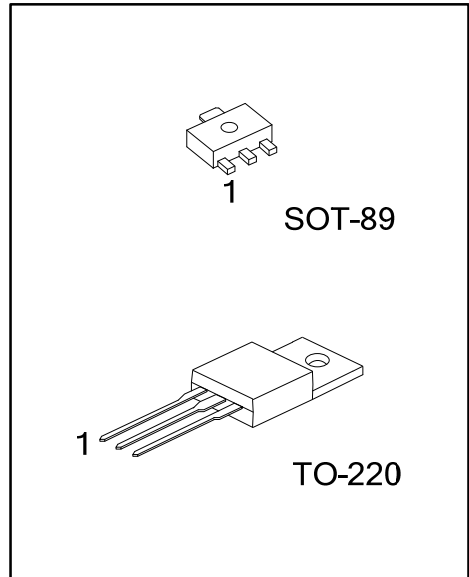


**2SD880****NPN SILICON TRANSISTOR****NPN EPITAXIAL TRANSISTOR****DESCRIPTION**

The UTC **2SD880** is designed for audio frequency power amplifier applications.

FEATURES

- * High DC Current Gain: $h_{FE}=200(\text{Max.})(V_{CE}=5V, I_C=0.5A)$
- * Low Saturation Voltage: $V_{CE(SAT)}=1.0V(\text{Max.})(I_C=3A, I_B=0.3A)$
- * Complementary to 2SB834

**ORDERING INFORMATION**

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
-	2SD880G-AB3-R	SOT-89	B	C	E	Tube
2SD880L-TA3-T	2SD880G-TA3-T	TO-220	B	C	E	Tube

Note: Pin Assignment: B: Base C: Collector E: Emitter

2SD880G-AB3-R (1) Packing Type (2) Package Type (3) Green Package	(1) T: Tube, R: Tape Reel (2) AB3: SOT-89, TA3: TO-220 (3) G: Halogen Free and Lead Free, L: Lead Free
---	---

MARKING

SOT-89	TO-220
□□□ 2SD880G → Data Code 1	UTC 2SD880□ □□□□□ Lot Code ← 1 → Data Code L: Lead Free G: Halogen Free

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER			SYMBOL	RATINGS	UNIT
Collector to Base Voltage			V _{CBO}	60	V
Collector to Emitter Voltage			V _{CEO}	60	V
Emitter to Base Voltage			V _{EBO}	7	V
Collector Current			I _C	3	A
Base Current			I _B	0.5	A
Power Dissipation	SOT-89	T _A =25	P _D	0.55	W
	TO-220			1.5	
	SOT-89	T _C =25		3	
	TO-220			30	
Junction Temperature			T _J	150	W
Storage Temperature			T _{STG}	-55~+150	°C







Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ **ELECTRICAL CHARACTERISTICS** ($T_A = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Emitter Breakdown Voltage	BV_{CEO}	$I_C = 50\text{mA}$, $I_E = 0$	60			V
Collector Cut-Off Current	I_{CBO}	$V_{CB} = 60\text{V}$, $I_E = 0$			100	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB} = 7\text{V}$, $I_C = 0$			100	μA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 3\text{A}$, $I_B = 300\text{mA}$			1	V
Base-Emitter Saturation Voltage	$V_{BE(ON)}$	$V_{CE} = 5\text{V}$, $I_C = 500\text{mA}$			1	V
DC Current Gain	h_{FE}	$I_C = 500\text{mA}$, $V_{CE} = 5\text{V}$	100		200	
Current gain bandwidth product	f_T	$V_{CE} = 5\text{V}$, $I_C = 500\text{mA}$		3		MHZ

■ TYPICAL CHARACTERISTICS

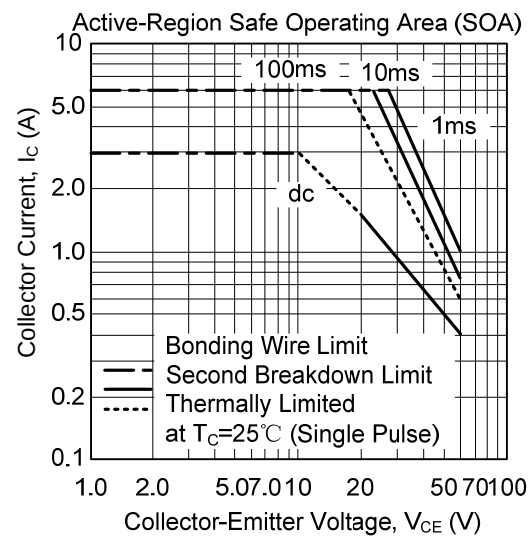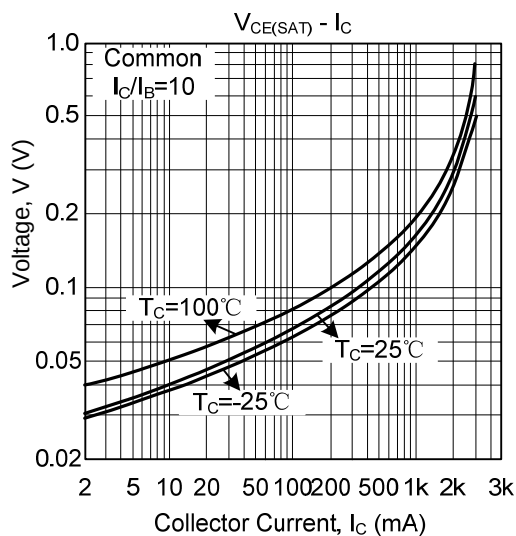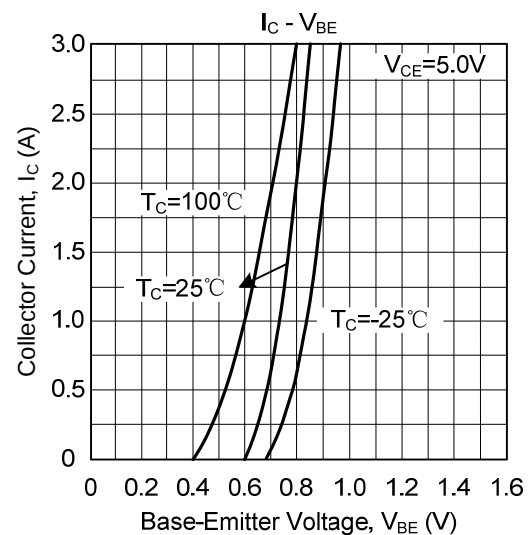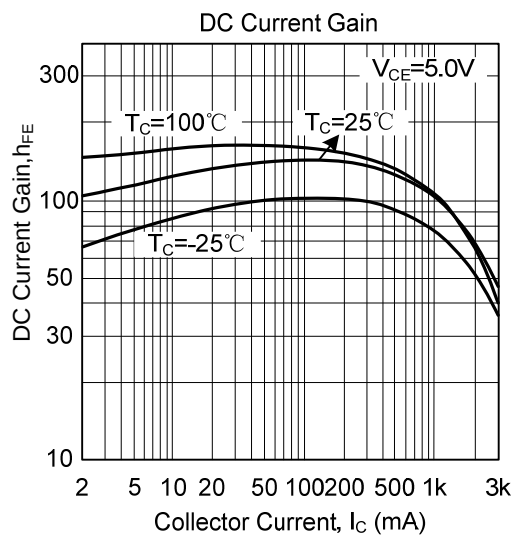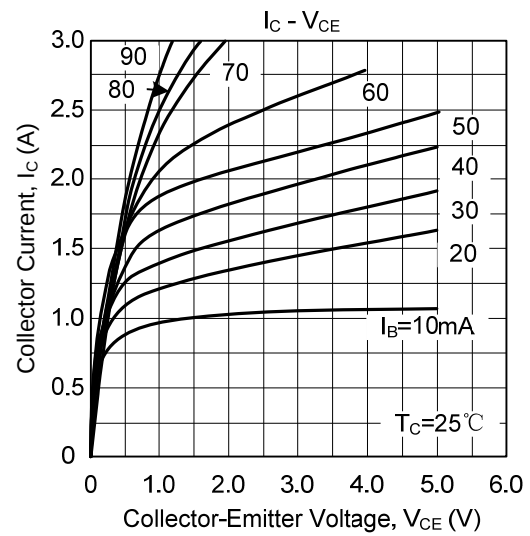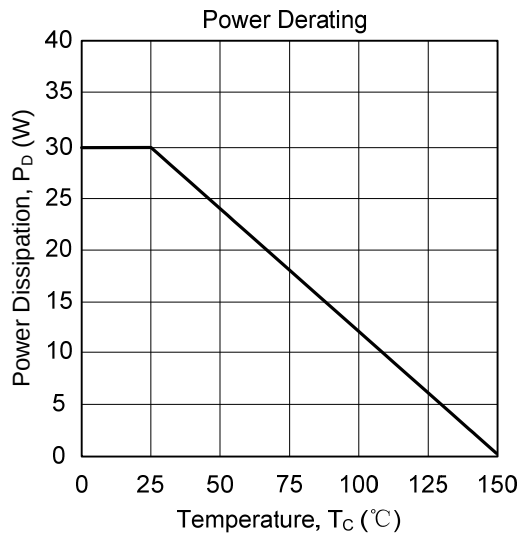

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.