

6.2 Amps, 600/650 Volts


N-CHANNEL MOSFET

DESCRIPTION

The 6N60 is a high voltage MOSFET and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and have a high rugged avalanche characteristics. This power MOSFET is usually used at high speed switching applications in switching power supplies and adaptors.


FEATURES

- * $R_{DS(ON)} = 1.5\Omega @ V_{GS} = 10V$
- * Ultra low gate charge (typical 20 nC)
- * Low reverse transfer Capacitance ($C_{RSS} = \text{typical } 10pF$)
- * Fast switching capability
- * Avalanche energy tested
- * Improved dv/dt capability, high ruggedness

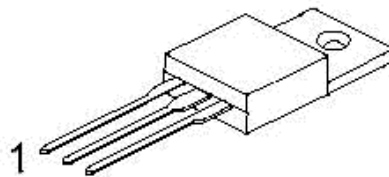

TO-220

SYMBOL



*Pb-free plating product number: 6N60L

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
6N60-x-TA3-T	6N60L-x-TA3-T	TO-220	G	D	S	Tube

6N60L-x-TA3-T  (1)Packing Type (2)Package Type (3)Drain-Source Voltage (4)Lead Plating	(1) T: Tube, R: Tape Reel (2) TA3: TO-220 (3) A: 600V, B: 650V (4) L: Lead Free Plating, Blank: Pb/Sn
--	--

ABSOLUTE MAXIMUM RATINGS (TC = 25 °C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage	6N60-A	V_{DS}	600	V
	6N60-B		650	V
Gate-Source Voltage		V_{GS}	±30	V
Avalanche Current (Note 1)		I_{AR}	6.2	A
Continuous Drain Current	TC = 25°C	I_D	6.2	A
	TC = 100°C		3.9	A
Pulsed Drain Current (Note 1)		I_{DM}	24.8	A
Avalanche Energy	Single Pulsed (Note 2)	E_{AS}	440	mJ
	Repetitive (Note 1)	E_{AR}	13	mJ
Power Dissipation		P_D	62.5	W
Junction Temperature		T_J	+150	°C
Operating Temperature		T_{OPR}	-55 ~ +150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction-to-Ambient	θ_{JA}	62	°C/W
Junction-to-Case	θ_{JC}	2	°C/W

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	6N60-A	BV_{DSS}	$V_{GS} = 0V, I_D = 250\mu A$	600		V
	6N60-B			650		V
Drain-Source Leakage Current		I_{DSS}	$V_{DS} = 600V, V_{GS} = 0V$		10	μA
Gate- Source Leakage Current	Forward	I_{GSS}	$V_{GS} = 30V, V_{DS} = 0V$		100	nA
	Reverse		$V_{GS} = -30V, V_{DS} = 0V$		-100	nA
Breakdown Voltage Temperature Coefficient	BV_{DSS}/T_J	$I_D = 250 \mu A$, Referenced to 25°C		0.53		V/°C
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2.0		4.0	V
Static Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 3.1A$			1.5	Ω
DYNAMIC CHARACTERISTICS						
Turn-On Delay Time	$t_{D(ON)}$	$V_{DD}=300V, I_D=6.2A, R_G=25\Omega$ (Note 4, 5)		20	50	ns
Turn-On Rise Time	t_R			70	150	ns
Turn-Off Delay Time	$t_{D(OFF)}$			40	90	ns
Turn-Off Fall Time	t_F			45	100	ns
Total Gate Charge	Q_G	$V_{DS}=480V, I_D=6.2A, V_{GS}=10V$ (Note 4, 5)		20	25	nC
Gate-Source Charge	Q_{GS}			4.9		nC
Gate-Drain Charge	Q_{GD}			9.4		nC

ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS} = 0\text{ V}, I_S = 6.2\text{ A}$			1.4	V
Maximum Continuous Drain-Source Diode Forward Current	I_S				6.2	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}				24.8	A
Reverse Recovery Time	t_{RR}	$V_{GS} = 0\text{ V}, I_S = 6.2\text{ A},$		290		ns
Reverse Recovery Charge	Q_{RR}	$di/dt = 100\text{ A}/\mu\text{s}$ (Note 4)		2.35		ns

1. Repetitive Rating : Pulse width limited by TJ
2. $L = 16.8\text{mH}$, $I_{AS} = 6\text{A}$, $V_{DD} = 90\text{V}$, $R_G = 25\ \Omega$, Starting TJ = 25°C
3. $I_{SD} \leq 6.2\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting TJ = 25°C
4. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$
5. Essentially independent of operating temperature

TEST CIRCUITS AND WAVEFORMS (Cont.)

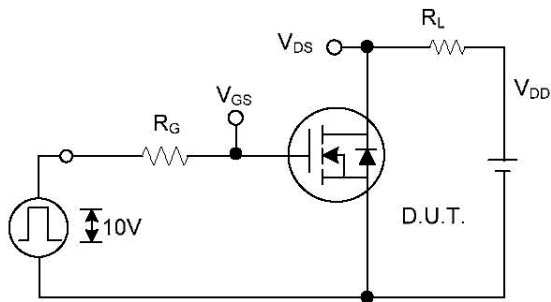


Fig. 2A Switching Test Circuit

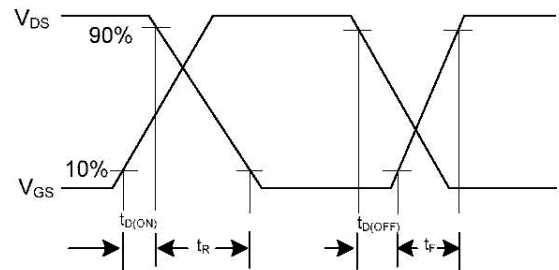


Fig. 2B Switching Waveforms

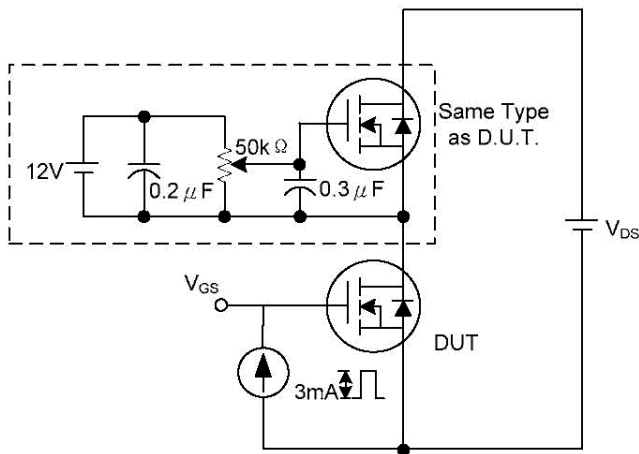


Fig. 3A Gate Charge Test Circuit

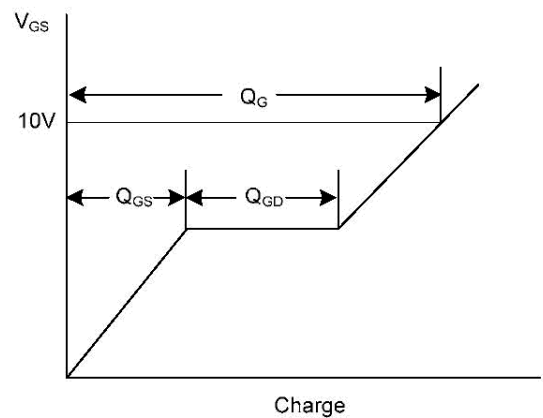


Fig. 3B Gate Charge Waveform

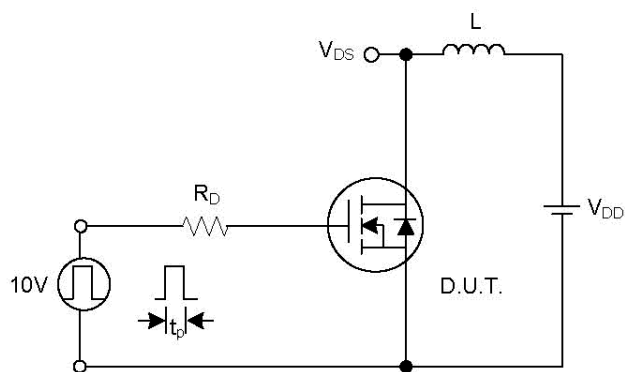


Fig. 4A Unclamped Inductive Switching Test Circuit

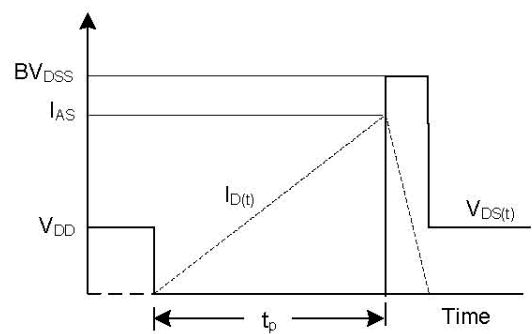


Fig. 4B Unclamped Inductive Switching Waveforms

