

MM3Z2V0_MM3Z75

VZ : 2.0 to 75 V

PD : 300 mW

Features

- Total Power Dissipation : Max. 300 mW
- Small plastic package suitable for surface mounted design
- Standard Zener Breakdown Voltage Range 2.0 to 75V
- Tolerance approximately $\pm 5\%$
- RoHS compliant package

Mechanical Data



- Case: SOD-323 Plastic Package
- Weight: approx. 0.004g

Packing & Order Information

3,000/Reel



RoHS
COMPLIANT

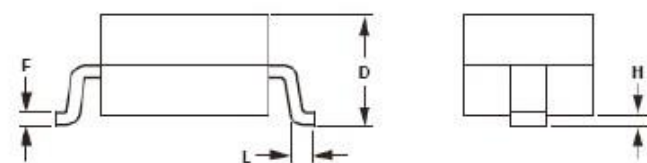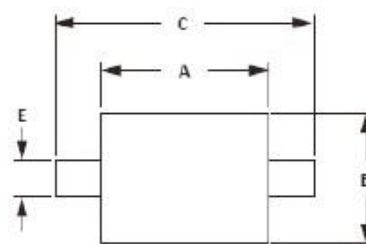

OUTLINE DIMENSIONS				
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.60	1.90	0.063	0.075
B	1.15	1.45	0.045	0.057
C	2.39	2.70	0.094	0.106
D	0.80	1.10	0.031	0.043
E	0.25	0.40	0.010	0.016
F	0.10	0.20	0.004	0.008
H	-	0.10	-	0.004
L	0.20	-	0.008	-
NOTES 1. Controlling dimension: millimeters. 2. Dimensioning and tolerances per ANSI Y14.5M, 1985. 3. Dimensions are exclusive of mold flash and metal burrs.				

Graphic symbol



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Maximum Ratings and Thermal Characteristics (Ta=25°C)

Symbol	Parameter	Value	Unit
P _{tot}	Power Dissipation	300	mW
V _F	Forward Voltage at I _F = 10 mA	0.9	V
R _{θJA}	Thermal Resistance form Junction to Ambient	0.3	K/mW
T _J	Junction Temperature Range	150	°C
T _{stg}	Storage Temperature Range	-65 to +150	°C

MM3Z2V0_MM3Z75

VZ : 2.0 to 75 V

PD : 300 mW

ELECTRICAL CHARACTERISTICS

Type No.	Marking	Zener Voltage (1)			Test Current	Zener Impedance(2)	Test Current	Leakage Current	
		VZ @ IZT (V)			IZT	ZZ @ IZ	IZ	IR @ VR	
		Min	Nom	Max	(mA)	(Ω)	(mA)	(μA)	(V)
MM3Z2V0	B0	1.80	2.0	2.15	5.0	100	5.0	120	0.5
MM3Z2V2	C0	2.08	2.2	2.33	5.0	100	5.0	120	0.07
MM3Z2V4	1C	2.28	2.4	2.56	5.0	100	5.0	120	1.0
MM3Z2V7	1D	2.5	2.7	2.9	5.0	110	5.0	120	1.0
MM3Z3V0	1E	2.8	3.0	3.2	5.0	120	5.0	50	1.0
MM3Z3V3	1F	3.1	3.3	3.5	5.0	130	5.0	20	1.0
MM3Z3V6	1H	3.4	3.6	3.8	5.0	130	5.0	10	1.0
MM3Z3V9	1J	3.7	3.9	4.1	5.0	130	5.0	5.0	1.0
MM3Z4V3	1K	4.0	4.3	4.6	5.0	130	5.0	5.0	1.0
MM3Z4V7	1M	4.4	4.7	5.0	5.0	130	5.0	2.0	1.0
MM3Z5V1	1N	4.8	5.1	5.4	5.0	130	5.0	2.0	1.5
MM3Z5V6	1P	5.2	5.6	6.0	5.0	80	5.0	1.0	2.5
MM3Z6V2	1R	5.8	6.2	6.6	5.0	50	5.0	1.0	3.0
MM3Z6V8	1X	6.4	6.8	7.2	5.0	30	5.0	0.5	3.5
MM3Z7V5	1Y	7.0	7.5	7.9	5.0	30	5.0	0.5	4.0
MM3Z8V2	1Z	7.7	8.2	8.7	5.0	30	5.0	0.5	5.0
MM3Z9V1	2A	8.5	9.1	9.6	5.0	30	5.0	0.5	6.0
MM3Z10	2B	9.4	10	10.6	5.0	30	5.0	0.1	7.0
MM3Z11	2C	10.4	11	11.6	5.0	30	5.0	0.1	8.0
MM3Z12	2D	11.4	12	12.7	5.0	35	5.0	0.1	9.0
MM3Z13	2E	12.4	13	14.1	5.0	35	5.0	0.1	10
MM3Z15	2F	13.8	15	15.8	5.0	40	5.0	0.1	11
MM3Z16	2H	15.3	16	17.1	5.0	40	5.0	0.1	12
MM3Z18	2J	16.8	18	19.1	5.0	45	5.0	0.1	13
MM3Z20	2K	18.8	20	21.2	5.0	50	5.0	0.1	15
MM3Z22	2M	20.8	22	23.3	5.0	55	5.0	0.1	17
MM3Z24	2N	22.8	24	25.6	5.0	60	2.0	0.1	19
MM3Z27	2P	25.1	27	28.9	5.0	70	2.0	0.1	21
MM3Z30	2R	28	30	32	5.0	80	2.0	0.1	23
MM3Z33	2X	31	33	35	5.0	80	2.0	0.1	25

MM3Z2V0_MM3Z75

VZ : 2.0 to 75 V

PD : 300 mW

ELECTRICAL CHARACTERISTICS

Type No.	Marking	Zener Voltage (1)			Test Current	Zener Impedance(2)	Test Current	Leakage Current	
		VZ @ IZT (V)			IZT	ZZ @ IZ	IZ	IR @ VR	
		Min	Nom	Max	(mA)	(Ω)	(mA)	(μA)	(V)
MM3Z36	2Y	34	36	38	5.0	90	2.0	0.1	27
MM3Z39	2Z	37	39	41	2.5	100	2.0	2.0	30
MM3Z43	3A	40	43	46	2.5	130	2.0	2.0	33
MM3Z47	3B	44	47	50	2.5	150	2.0	2.0	36
MM3Z51	3C	48	51	54	2.5	180	2.0	1.0	39
MM3Z56	3D	52	56	60	2.5	180	2.0	1.0	43
MM3Z62	3E	58	62	66	2.5	200	2.0	0.2	47
MM3Z68	3F	64	68	72	2.5	250	2.0	0.2	52
MM3Z75	3H	70	75	79	2.5	300	2.0	0.2	57

Notes :

(1) Vz is tested with pulses (20 ms).

(2) Zz is measured at Iz by given a very small A.C. current signal.

MM3Z2V0_MM3Z75

VZ : 2.0 to 75 V

PD : 300 mW

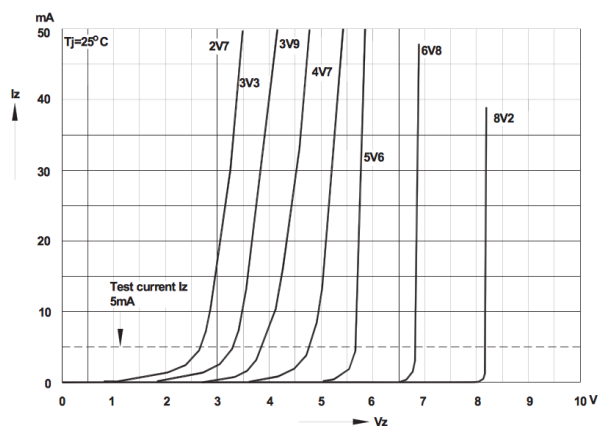


Fig 1 Breakdown characteristics Tj = constant (pulsed)

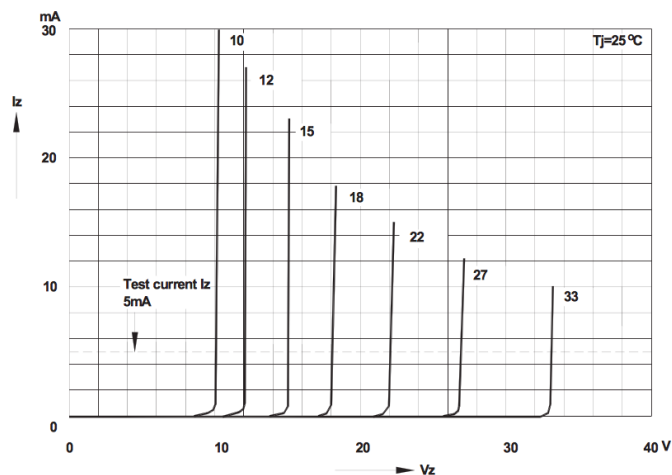


Fig 2 Breakdown characteristics Tj = constant (pulsed)

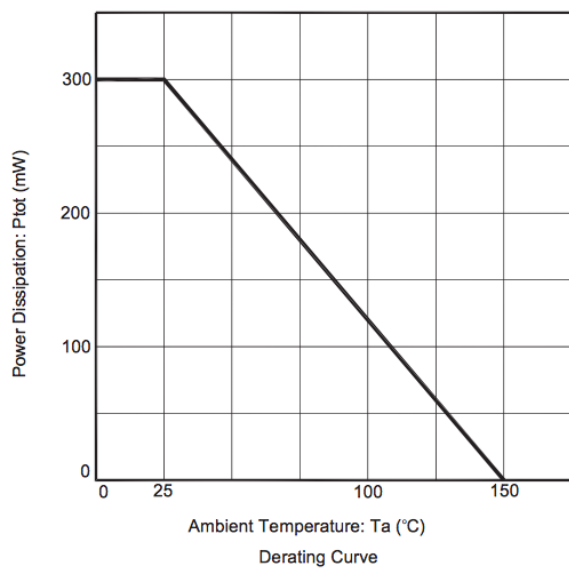


Fig 3 Power Derating

MM3Z2V0_MM3Z75

VZ : 2.0 to 75 V

PD : 300 mW

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Bruckewell Technology Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Bruckewell"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product. Bruckewell makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Bruckewell disclaims

- (i) Any and all liability arising out of the application or use of any product.
- (ii) Any and all liability, including without limitation special, consequential or incidental damages.
- (iii) Any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Bruckewell's knowledge of typical requirements that are often placed on Bruckewell products in generic applications.

Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time.

Product specifications do not expand or otherwise modify Bruckewell's terms and conditions of purchase, including but not limited to the warranty expressed therein.