


Applications

- General Purpose Wireless
- Uplink Band 34 and Band 39 Infrastructure

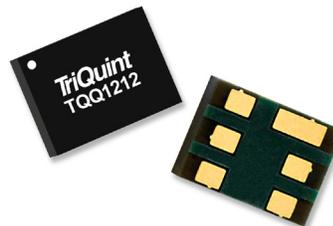


6 Pin 3 x 4 mm leadless SMT Package

Product Features

- Band 34 Usable Bandwidth 15 MHz
- Band 39 Usable Bandwidth 40 MHz
- Single-Input/Single-Output Dual Passband
- High Attenuation
- Low Loss
- Internally Match for Single Ended 50 Ohm Operation
- Small Size: 4.00 x 3.00 x 1.07 mm
- Surface Mount Device
- RoHS compliant, Pb-free

Functional Block Diagram

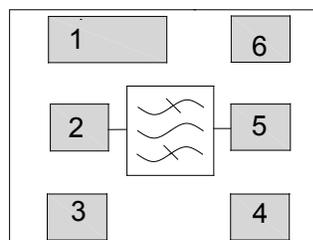

Top View

General Description

TQQ1212 is a general purpose Dual Band Uplink SAW filter Module for Band 34 and 39. This module was specifically designed in a 4 x 3 mm package for base station applications where two filter passbands share an optimally phased single input and a single output.

Low insertion loss, coupled with high attenuation and excellent power handling, makes this filter a natural choice for our customers RF filtering needs.

This filter module is part of TriQuint's wide portfolio of RF filters.

Pin Configuration

Pin No.	Label
2	Input
5	Output
1, 3, 4, 6	Case Ground

Ordering Information

Part No.	Description
TQQ1212	Dual Band Saw Filter Module
TQQ1212-PCB	Evaluation board

Standard T/R size = 2500 pieces on a 13" reel

Absolute Maximum Ratings

Parameter	Rating
Storage Temperature	-55 to 150 °C
RF Input Power ⁽¹⁾	+19 dBm
RF Input Power ⁽²⁾	+20 dBm

Notes:

1. CW modulated RF signal at 55 °C for 10000 hours.
2. CW modulated RF signal at 55 °C for 5000 hours.
3. Operation of this device outside the parameter ranges given above may cause permanent damage.

Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
T _{CASE}	-40		+85	°C

Electrical specifications are measured at specified test conditions.



Electrical Specifications ^(1,2,3,4)

Parameter	Conditions	Min	Typ	Max	Units
Center Frequency	Band 39	-	1900	-	MHz
	Band 34	-	2017.5	-	MHz
Insertion Loss	1880 – 1920 MHz	-	2.3	3.8	dB
	2010 – 2025 MHz	-	2.7	3.8	dB
Amplitude Variation ⁽⁵⁾	1880 – 1920 MHz	-	0.7	2.0	dB
	2010 – 2025 MHz	-	0.4	1.4	dB
Group Delay	1880 – 1920 MHz	-	14	31	ns
	2010 – 2025 MHz	-	18	36	ns
Group Delay Variation ⁽⁶⁾	1880 – 1920 MHz	-	8.6	20	ns
	2010 – 2025 MHz	-	3.4	20	ns
Input Return Loss	1880 – 1920 MHz	9.5	13	-	dB
	2010 – 2025 MHz	11	17	-	
Output Return Loss	1880 – 1920 MHz	9.5	13	-	dB
	2010 – 2025 MHz	10.5	17	-	
Stopband Attenuation ⁽⁷⁾	10 – 1700 MHz	26	28	-	dB
	1700 – 1785 MHz	29	31	-	
	1785 – 1800 MHz	28	43	-	
	1840.48 – 1855.48 MHz	20	31	-	
	1950 – 1980 MHz	13	31	-	
	2070 – 2110 MHz	25	34	-	
	2110 – 2300 MHz	32	36	-	
	2300 – 2400 MHz	33	38	-	
2400 – 4000 MHz	28	37	-		
Source/Load Impedance ⁽⁸⁾	Single ended	-	50	-	Ohms

Notes:

1. All specifications are based on the TriQuint schematic for the main reference design.
2. In production, devices will be tested at room temperature to a guard-banded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Typical values are based on average measurements at room temperature of 25°C
5. This is defined as the difference between the maximum and minimum insertion loss within the specified band
6. This is defined as the worst difference between a peak and adjacent valley within defined frequency points
7. Relative to zero dB
8. This is the optimum impedance in order to achieve the performance shown

TQQ1212-PCB Evaluation Board

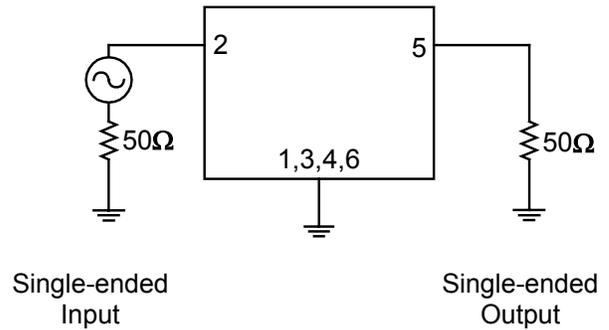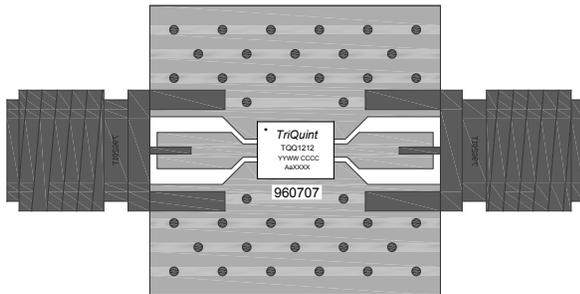

Bill of Material – TQQ1212-PCB







Reference Des.	Value	Description	Manuf.	Part Number
U1	n/a	Dual Band Saw Filter	TriQuint	TQQ1212
n/a	n/a	Printed Circuit Board	TriQuint	960707
n/a	n/a	SMA Edge Connector	Radiall	9602-1111-018

Evaluation Board PCB Information

Top, middle & bottom layers: 1 oz copper
 Substrates: FR4 dielectric, .031" thick
 Finish plating: Nickel: 3-8μm thick, Gold: .03-.2μm thick
 Hole plating: Copper min .0008μm thick







Performance Plots – Band 39

Test conditions unless otherwise noted: Temp= +25°C

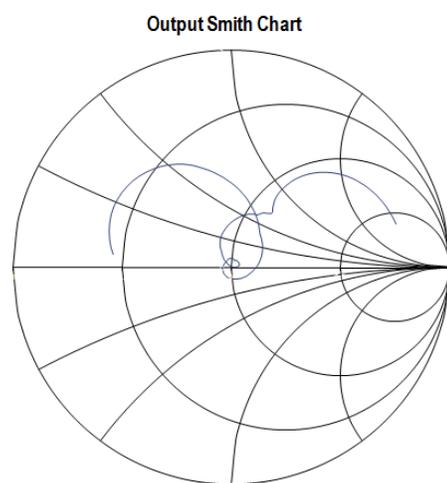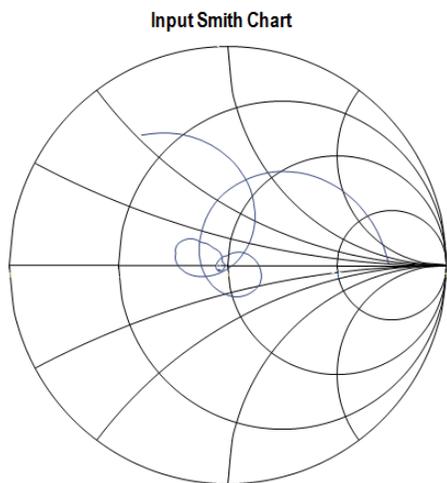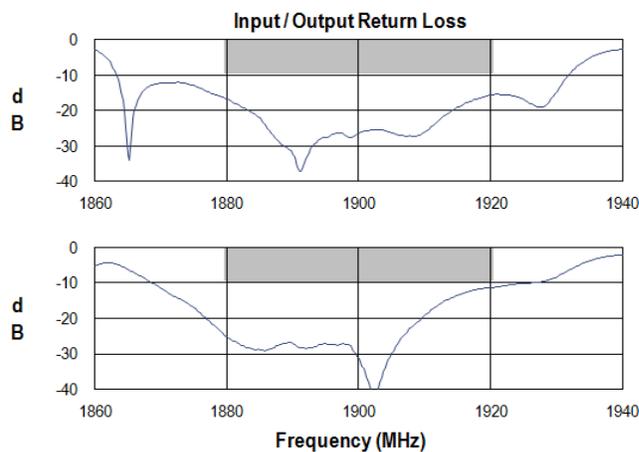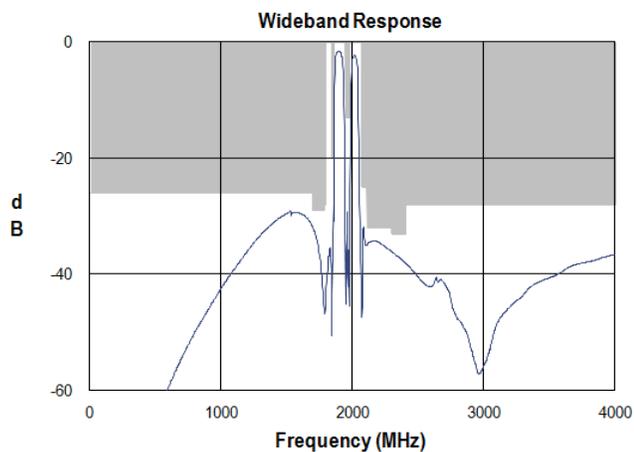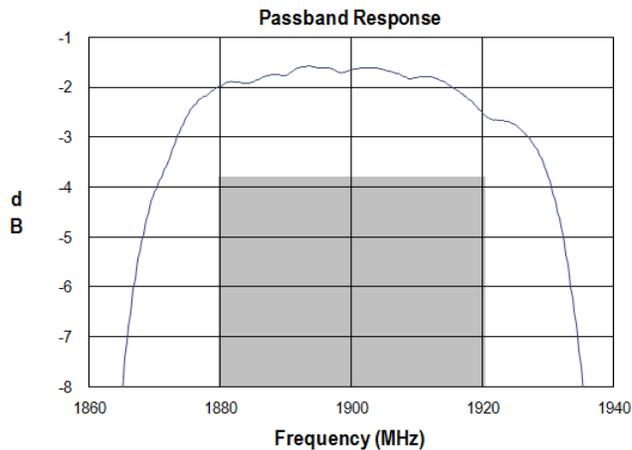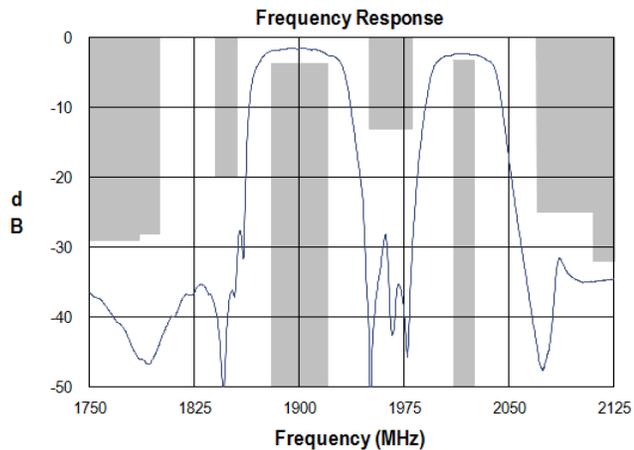


Performance Plots – Band 34

Test conditions unless otherwise noted: Temp= +25°C

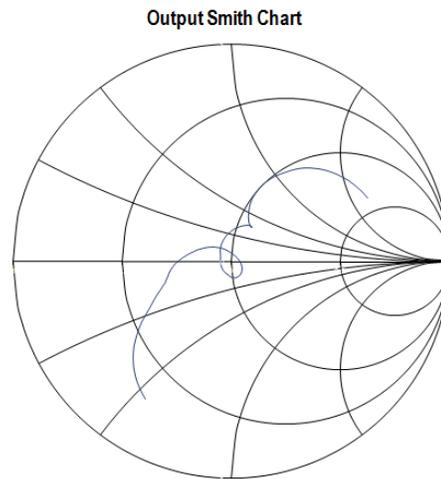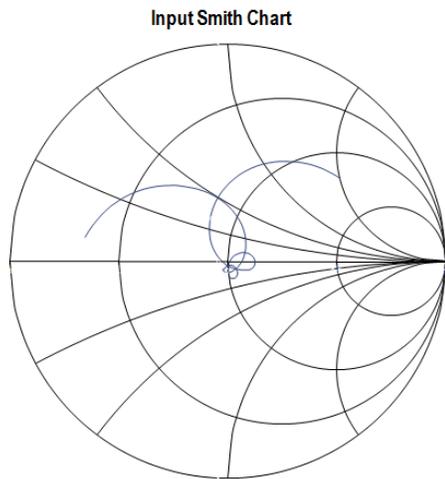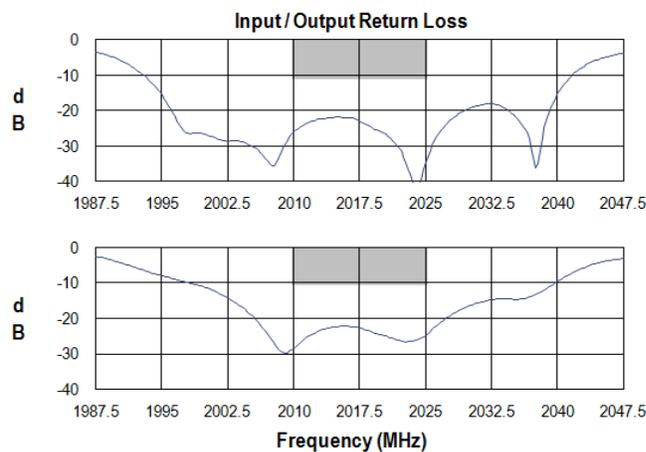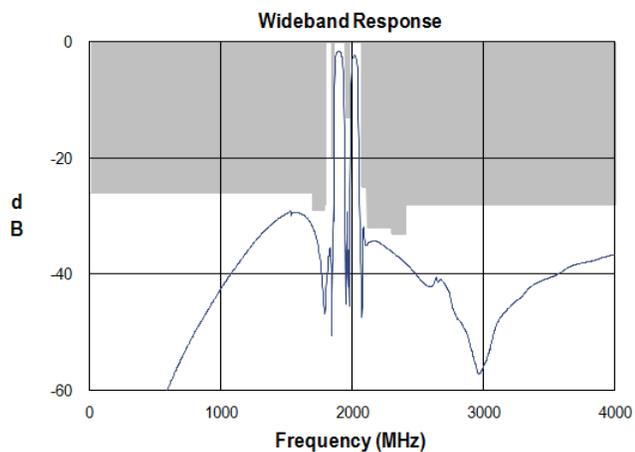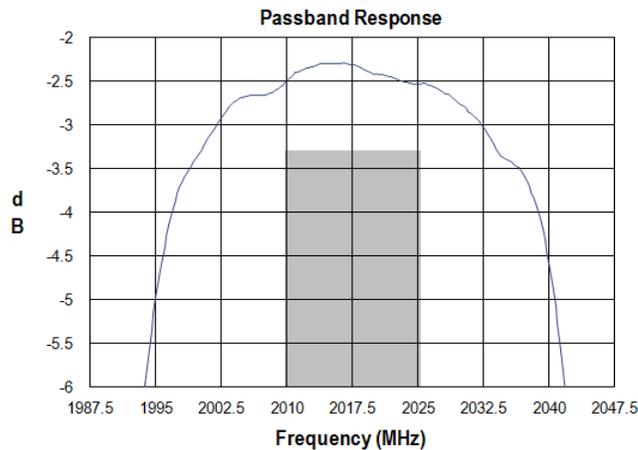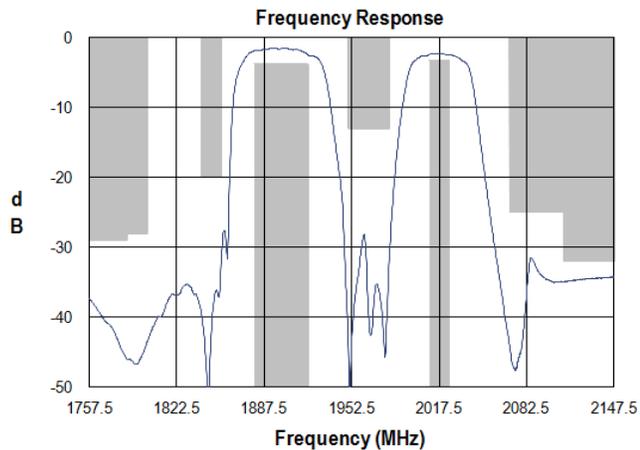

Package Material, Marking and Dimensions

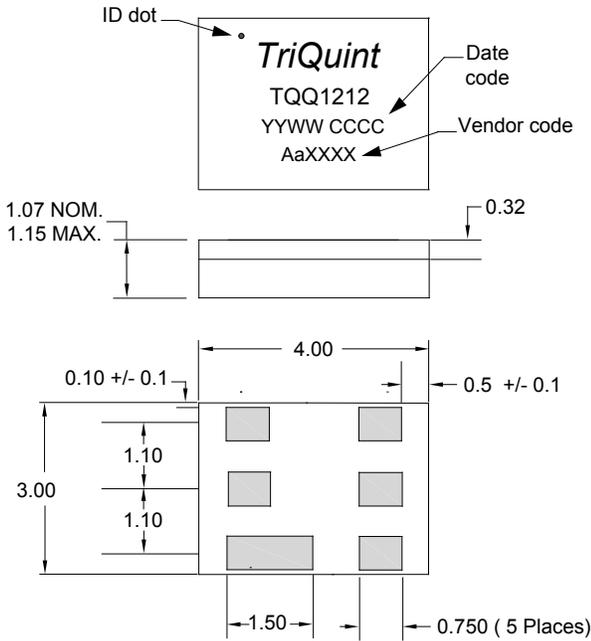

Package Style: 6-pin 4x3 leadless SMT
 Dimensions: 4.00 x 3.00 x 1.07 mm

4 layer laminate based over-molded module
 Plating on leads: Electrolytic Ni/Au


All dimensions shown are nominal in millimeters
 All tolerances are ±0.15mm except overall length and width ±0.10mm

The date code consists of YYWW = Year/Week, XXXX = (XXXX= lot number).

PCB Mounting Pattern

Notes:



1. All dimensions are in millimeters. Angles are in degrees.
2. Use 1 oz. copper minimum for top and bottom layer metal.

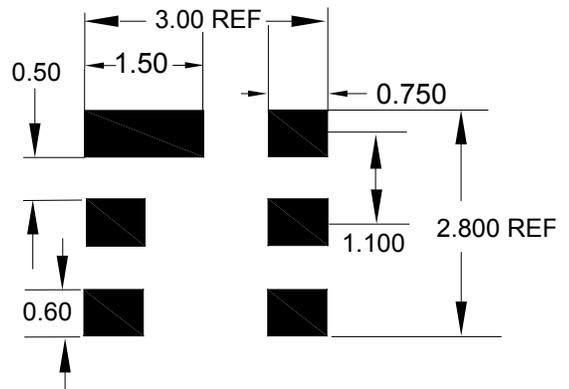

Tape and Reel Information

Tape and reel specifications for this part are also available on the TriQuint website.
 Standard T/R size = 2500 pieces per reel.

MODULE 3.5X3.5, 4x4, 5x5 and 6x6
 User Direction of Feed →

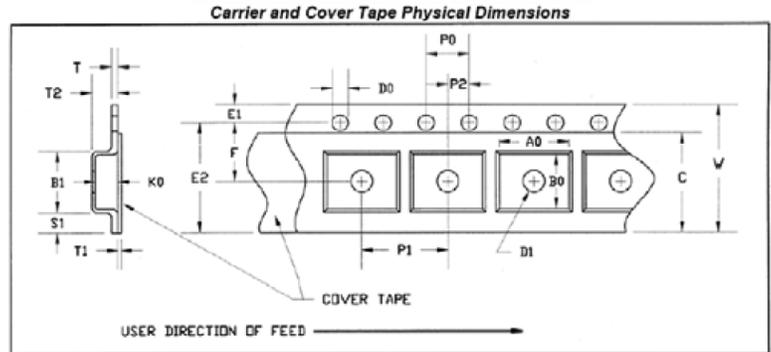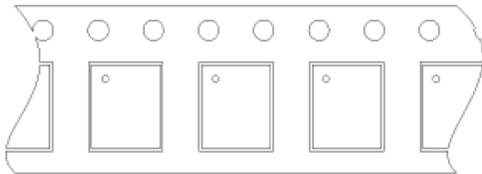

Feature	Measure	Symbol	Size (in)	Size (mm)
Cavity	Length	A0	0.134	3.40
	Width	B0	0.126	3.20
	Depth	K0	0.055	1.40
	Pitch	P1	0.157	4.00
Centerline Distance	Cavity to Perforation - Length Direction	P2	0.079	2.00
	Cavity to Perforation - Width Direction	F	0.138	3.50
Cover Tape	Width	C	0.213	5.40
Carrier Tape	Width	W	0.315	8.00

Product Compliance Information

ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Rating: Class 3B
Value: ≥ 8000 V
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ESD Rating: Class IV
Value: Passes ≥ 1000 V
Test: Charged Device Model (CDM)
Standard: JEDEC Standard JESD22-C101

MSL Rating

MSL Rating: Level 3
Test: 260°C convection reflow
Standard: JEDEC Standard IPC/JEDEC J-STD-020

Solderability

Compatible with both lead-free (260°C maximum reflow temperature) and tin/lead (245°C maximum reflow temperature) soldering processes.

Contact plating: Electrolytic Ni/Au

RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead Free
- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A ($\text{C}_{15}\text{H}_{12}\text{Br}_4\text{O}_2$) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com Tel: +1.407.886.8860
Email: info-sales@triquint.com Fax: +1.407.886.7061

For technical questions and application information:

Email: flapplication.engineering@triquint.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.