


# PRODUCT SPECIFICATION

DATE: 06/10/11'


<b>cosmo</b> ELECTRONICS CORPORATION	Reed Relay :	NO. 50R06003	REV.
	<b>SS1A240000</b>	SHEET 1 OF 2	3

## 1. OUTSIDE DIMENSION : UNIT ( mm )

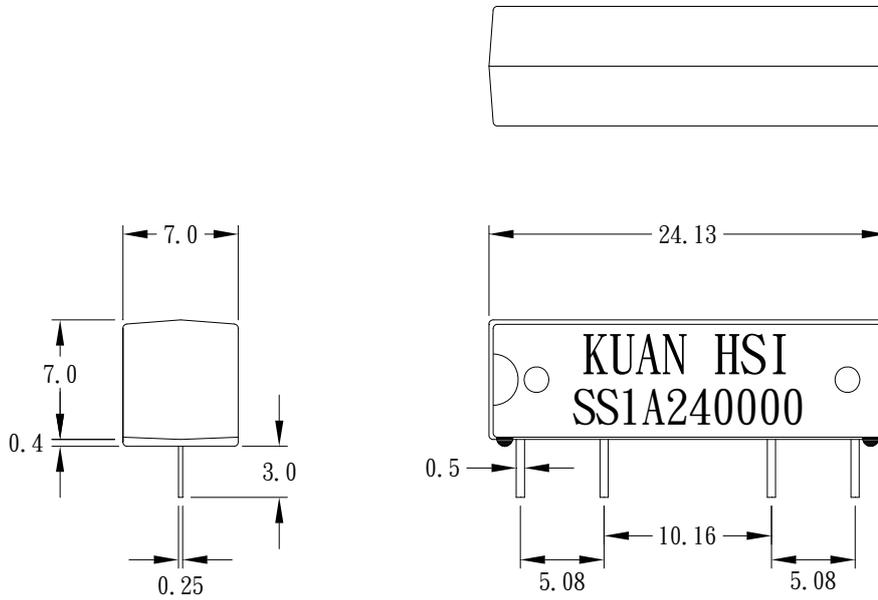

TOLERANCE :  $\pm 0.1\text{mm}$

## 2. SCHEMATIC : TOP VIEW

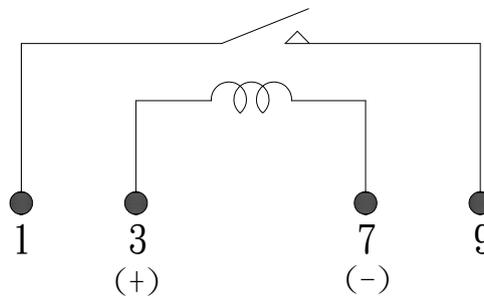

# PRODUCT SPECIFICATION

DATE: 06/10/11'

<b>cosmo</b> ELECTRONICS CORPORATION	Reed Relay :	NO. 50R06003	REV.
	<b>SS1A240000</b>	SHEET 2 OF 2	3

## 3.0 COIL RATINGS : (AT 20°C)

3.1	Coil resistance	2000	Ω	(±10%)
3.2	Nominal coil voltage	24	VDC	
3.3	Maximum Continuous voltage	28	VDC	
3.4	Must operate	18	VDC	
3.5	Must release	2.4	VDC	
3.6	Rated current	12	mA	

## 4.0 ELECTRONICAL CHARACTERISTICS :

4.1	Contact resistance	100	mΩ	(max)
4.2	Operate time	0.5	ms	(max)
4.3	Bounce time	0.5	ms	(max)
4.4	Release time	0.2	ms	(max)
4.5	Insulation resistance	(100 VDC open contact)	10 <sup>11</sup>	Ω (min)
4.6	Power	10	VA	(max)
4.7	Switching voltage	200	VDC	(max)
4.8	Switching current	0.5	A	(max)
4.9	Carry current	1.0	A	(max)
4.10	Breakdown voltage	(across open contact)	250	VDC (min)
		(between coil & contact)	2500	VDC (min)
4.11	Life expectancy	(signal level)	10 <sup>8</sup>	
4.12	Operating temp		-40 to 85°C	
4.13	Storage temp		-50 to 125°C	
4.14	Resonant frequency		3.5	KHZ
4.15	Vibration (10-2000HZ)		20	g (max)
4.16	Minimum permissible load		100	mVDC 10uA