



Driver NPN Transistors

(Pb) Lead(Pb)-Free



SOT-23

MAXIMUM RATINGS

Rating	Symbol	MMBTA05	MMBTA06	Unit
Collector-Emitter Voltage	V_{CEO}	60	80	Vdc
Collector-Base Voltage	V_{CBO}	60	80	Vdc
Emitter-Base Voltage	V_{EBO}	4.0	4.0	Vdc
Collector Current-Continuous	I_C	500		mAdc

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (1) TA=25°C Derate above 25°C	P_D	225 1.8	mW mW/°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	°C/W
Total Device Dissipation Alumina Substrate, (2) TA=25°C Derate above 25°C	P_D	300 2.4	mW mW/°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	°C/W
Junction and Storage, Temperature	T_J, T_{stg}	-55 to +150	°C

DEVICE MARKING

MMBTA05=1H, MMBTA06=1GM

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min	Max	Unit
-----------------	--------	-----	-----	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage (3) ($I_C=1.0$ mAdc, $I_B=0$) MMBTA05 MMBTA06	$V_{(BR)CEO}$	60 80	- -	Vdc
Collector-Base Breakdown Voltage ($I_C=100$ μAdc, $I_E=0$) MMBTA05 MMBTA06	$V_{(BR)CBO}$	60 80	- -	Vdc
Emitter-Base Breakdown Voltage ($I_E=100$ μAdc, $I_C=0$)	$V_{(BR)EBO}$	4.0	-	Vdc
Collector Cutoff Current ($V_{CE}=60$ Vdc, $I_B=0$)	I_{CES}	-	0.1	μAdc
Collector Cutoff Current ($V_{CB}=60$ Vdc, $I_E=0$) ($V_{CB}=80$ Vdc, $I_E=0$)	I_{CBO}	- -	0.1 0.1	μAdc

1.FR-5=1.0 x 0.75 x 0.062 in

2.Alumina=0.4 x 0.3 x 0.024 in. 99.5% alumina

3.Pulse Test:Pulse Width ≤300us, Duty Cycle ≤2.0%

4. f_T is defined as the frequency at which h_{fe} extrapolates to unity

ELECTRICAL CHARACTERISTICS (T_A = 25 °C unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

ON CHARACTERISTICS

DC Current Gain (I _C = 10 mAdc, V _{CE} = 1.0 Vdc) (I _C = 100 mAdc, V _{CE} = 1.0 Vdc)	h _{FE}	100	-	-
		100	-	-
Collector- Emitter Saturation Voltage (I _C = 100 mAdc, I _B = 10 mAdc)	V _{CE(sat)}	-	0.25	Vdc
Base- Emitter On Voltage (I _C = 100 mAdc, V _{CE} = 1.0 Vdc)	V _{BE(on)}	-	1.2	Vdc

SMALL- SIGNAL CHARACTERISTICS

Current- Gain - Bandwidth Product (4) (I _C = 10 mA, V _{CE} = 2.0 V, f = 100 MHz)	f _T	100	-	MHz
---	----------------	-----	---	-----

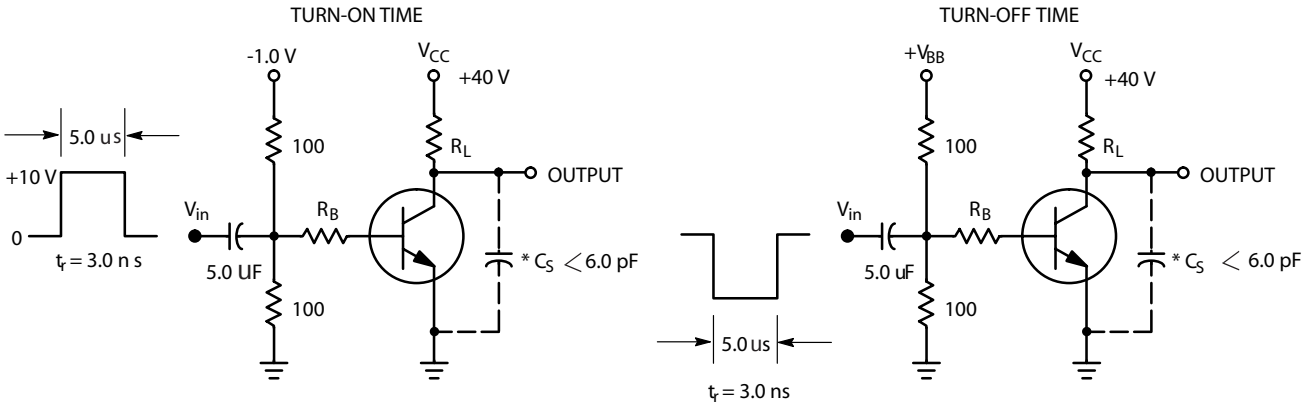


FIG1. Switching Time Test Circuits








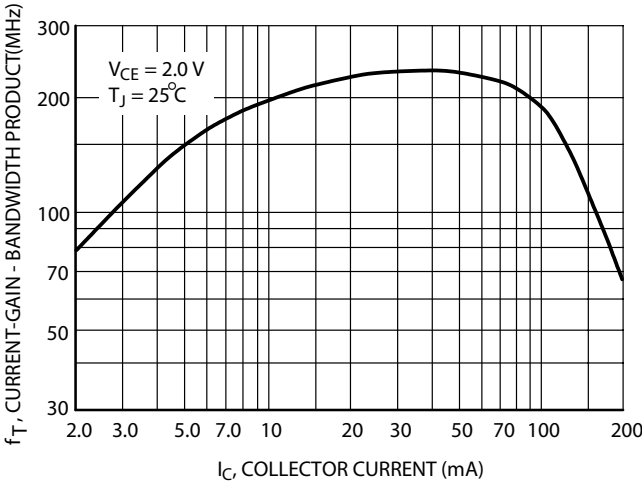


FIG2. Current-Gain Bandwidth Product

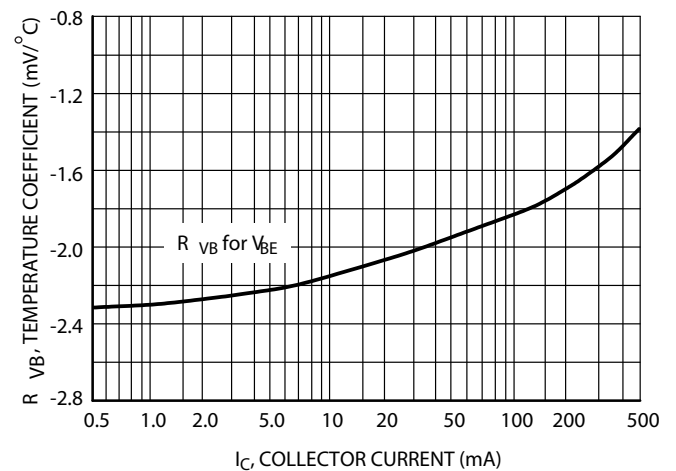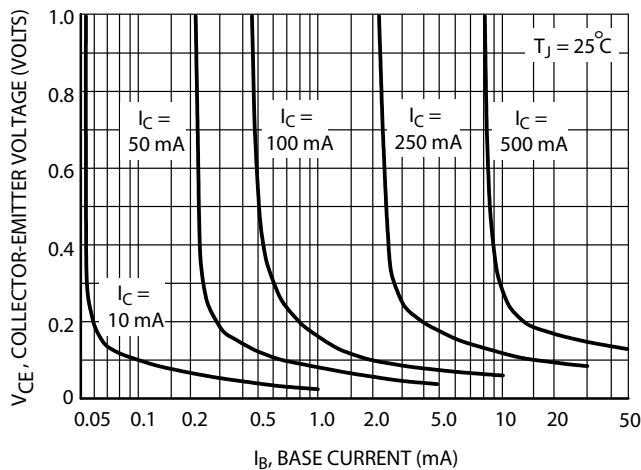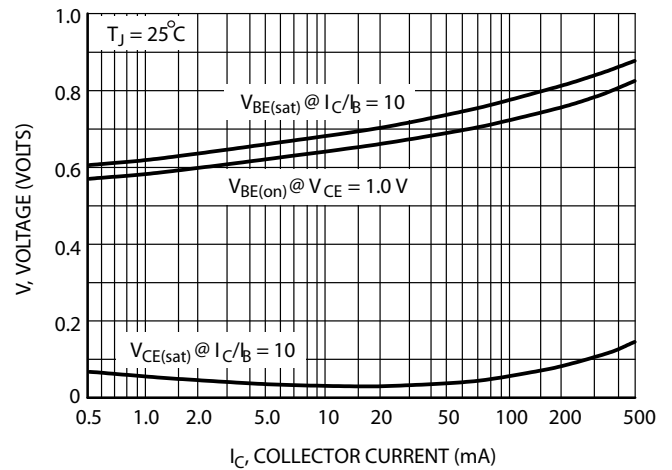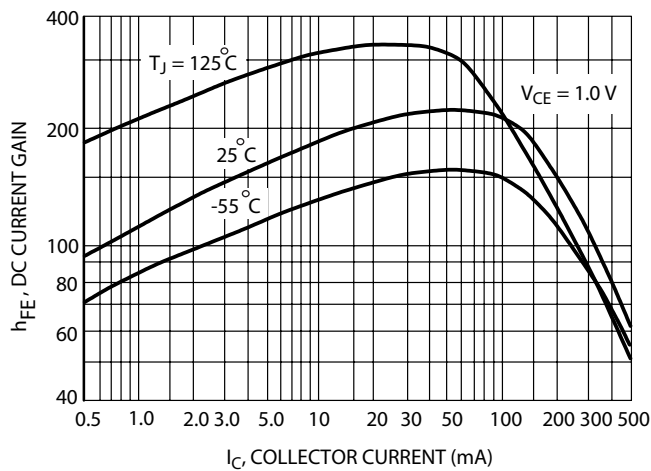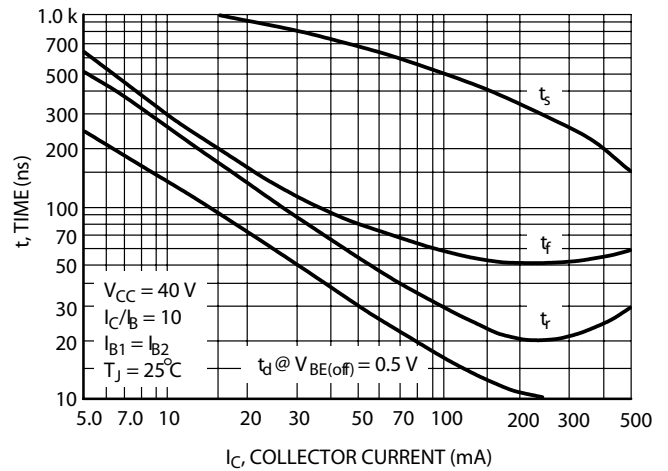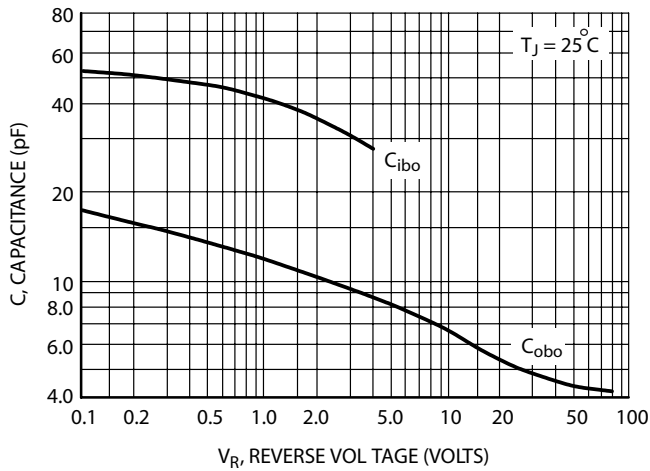

SOT-23 Package Outline Dimensions

Unit:mm

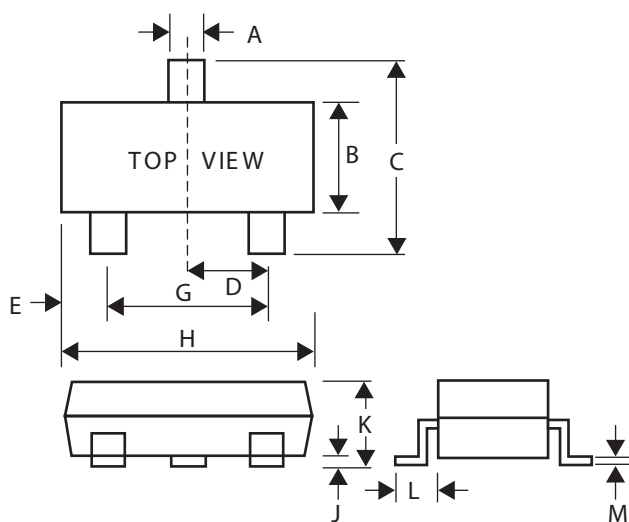

Dim	Min	Max
A	0.35	0.51
B	1.19	1.80
C	2.10	3.00
D	0.85	1.05
E	0.46	1.00
G	1.70	2.10
H	2.70	3.10
J	0.01	0.13
K	0.89	1.60
L	0.30	0.61
M	0.076	0.25