

PNP GENERAL PURPOSE TRANSISTOR

REVERSE VOLTAGE – 60 to 80 Volts
FORWARD CURRENT – 0.5 Amperes


FEATURES

- Surface mount device
- Simplifies circuit design
- Reduces board space
- Reduces component count

MECHANICAL DATA

- Case: SOT-23 plastic
- Lead Free in RoHS 2002/95/EC Compliant
- Case material: “Green” molding compound, UL flammability classification 94V-0, (No Br. Sb. Cl)

SOT-23

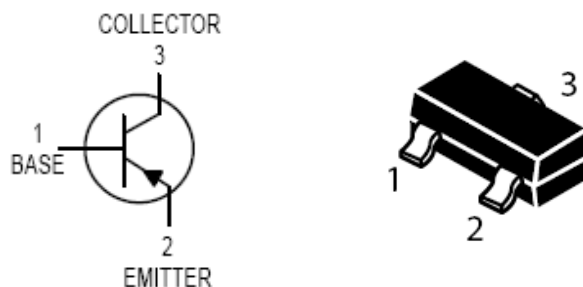

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	MMBTA55	MMBTA56	UNIT
Collector-emitter voltage	V_{CEO}	-60	-80	Vdc
Collector-base voltage	V_{CBO}	-60	-80	Vdc
Emitter-base voltage	V_{EBO}	-4.0		Vdc
Collector current-continuous	I_C	-500		mAdc

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MAX.	UNIT
Total device dissipation FR-5 board (Note 1) @ $T_A = 25^\circ\text{C}$	P_D	225	mW
Thermal resistance junction to ambient	R_{thJA}	556	$^\circ\text{C/W}$
Total device dissipation alumina substrate (Note 2) @ $T_A = 25^\circ\text{C}$	P_D	300	mW
Thermal resistance junction to ambient	R_{thJA}	417	$^\circ\text{C/W}$
Junction and storage temperature rang	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Note:

1. FR-5 = 1.0 * 0.75 * 0.062 in.
2. Alumina = 0.4 * 0.3 * 0.024 in 99.5% alumina.

REV-0, MAY.-2015, KSPR19

ORDERING INFORMATION

DEVICE	MARKING	SHIPPING
MMBTA55	2H	3000/ Tape & Reel
MMBTA56	2GM	3000/ Tape & Reel

ELECTRICAL CHARACTERISTIC

MMBTA55 thru MMBTA56



OFF CHARACTERISTICS

PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX	UNIT
Collector-emitter breakdown voltage (Note 3)	$I_C = -1.0 \text{ mAdc}$, $I_B = 0$	MMBTA55	- 60	--	Vdc
		MMBTA56	- 80		
Emitter-base breakdown voltage	$I_E = -100 \text{ uAdc}$, $I_C = 0$	MMBTA55	- 4.0	--	V
		MMBTA56			
Collector cutoff current	$V_{CE} = -60 \text{ Vdc}$, $I_B = 0$	MMBTA55	--	- 0.1	μAdc
		MMBTA56			
Collector cutoff current	$V_{CE} = -60 \text{ Vdc}$, $I_E = 0$	MMBTA55	--	- 0.1	μAdc
	$V_{CE} = -80 \text{ Vdc}$, $I_E = 0$	MMBTA56			

ON CHARACTERISTICS

PARAMETER	TEST CONDITION		SYMBOL	MIN.	MAX	UNIT
DC current gain	$I_C = -10\text{ mAdc}$, $I_{CE} = -1.0\text{ Vdc}$	MMBTA55	h_{FE}	100	--	--
	$I_C = -100\text{ mAdc}$, $I_{CE} = -1.0\text{ Vdc}$					
	$I_C = -10\text{ mAdc}$, $I_{CE} = -1.0\text{ Vdc}$	MMBTA56		100	--	
	$I_C = -100\text{ mAdc}$, $I_{CE} = -1.0\text{ Vdc}$					
Collector-emitter saturation voltage	$I_C = -100\text{ mAdc}$, $I_B = -10\text{ mAdc}$	MMBTA55	$V_{CE(SAT)}$	--	- 0.25	Vdc
		MMBTA56				
Base-emitter on voltage	$I_C = -100\text{ mAdc}$, $V_{CE} = -1.0\text{ Vdc}$	MMBTA55	$V_{BE(SAT)}$	--	- 1.2	Vdc
		MMBTA56				

SMALL – SIGNAL CHARACTERISTICS


PARAMETER	TEST CONDITION	SYMBOL	MIN.	MAX	UNIT
Current-gain-bandwidth product (Note 4)	$I_C = -100 \text{ mAdc}$, $V_{CE} = -1.0 \text{ Vdc}$, $f = 100 \text{ MHz}$	MMBTA55	50	--	MHz
		MMBTA56			

Note:

3. Pulse Test: pulse width $\leq 300 \mu\text{s}$, duty cycle $\leq 2.0\%$

4. f_T is defined as the frequency at which $|h_{fe}|$ extrapolates to unity..

FIG.1 - Switching time test circuits

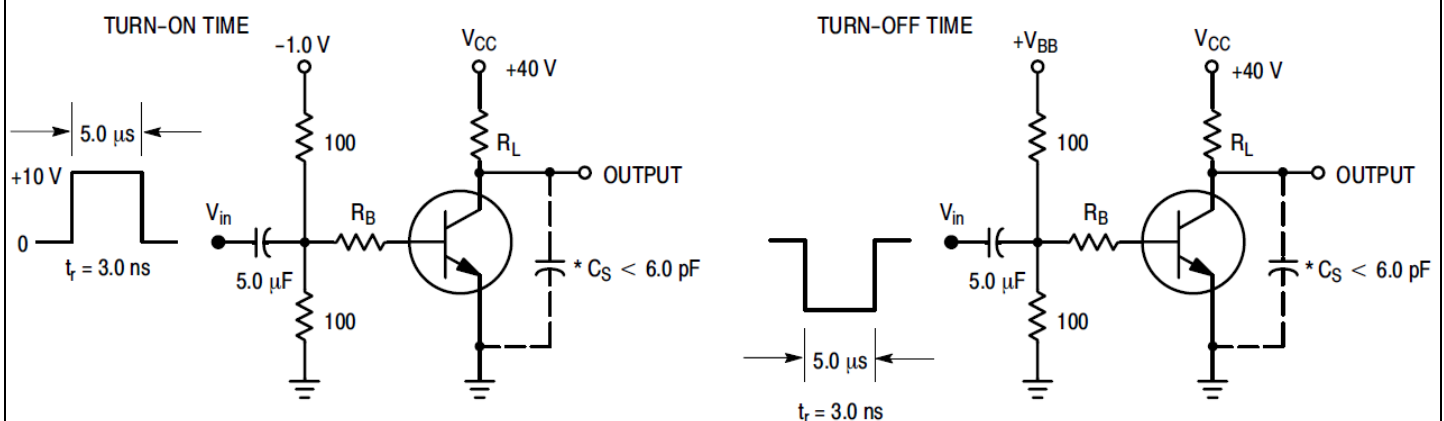

* Total shunt capacitance of test jig and connectors for PNP test circuits, reverse all voltage polarities.

ELECTRICAL CHARACTERISTIC CURVES
MMBTA55 thru MMBTA56



FIG.2 - Current-gain-bandwidth product

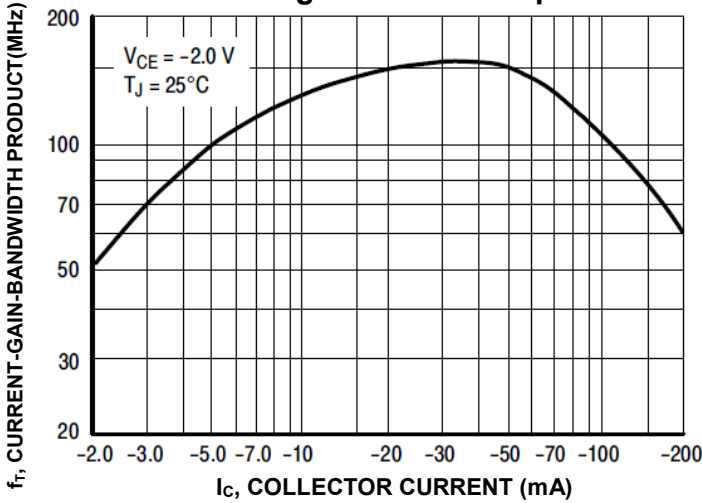


FIG.3 - Capacitance

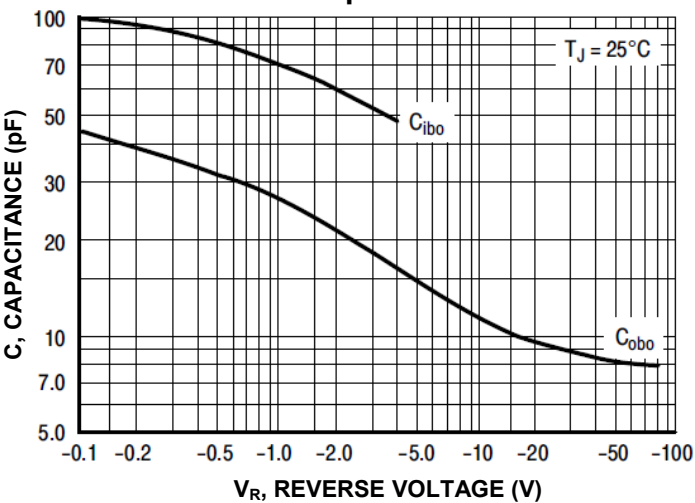


FIG.4 - Switching time

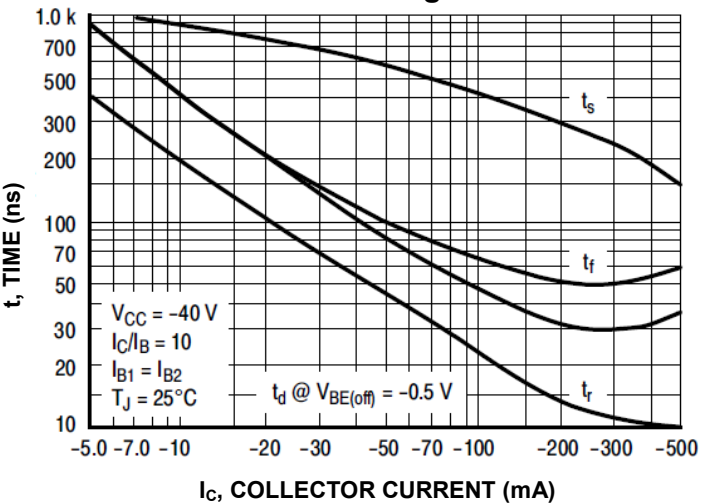


FIG.5 - DC current gain

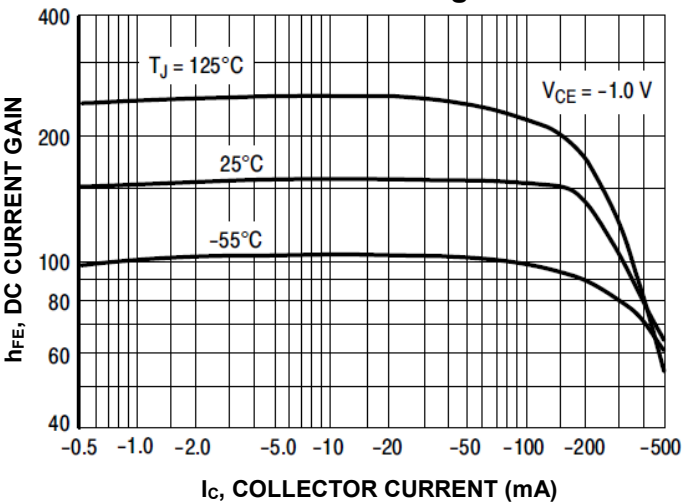


FIG.6 - Collector emitter saturation voltage vs. collector current

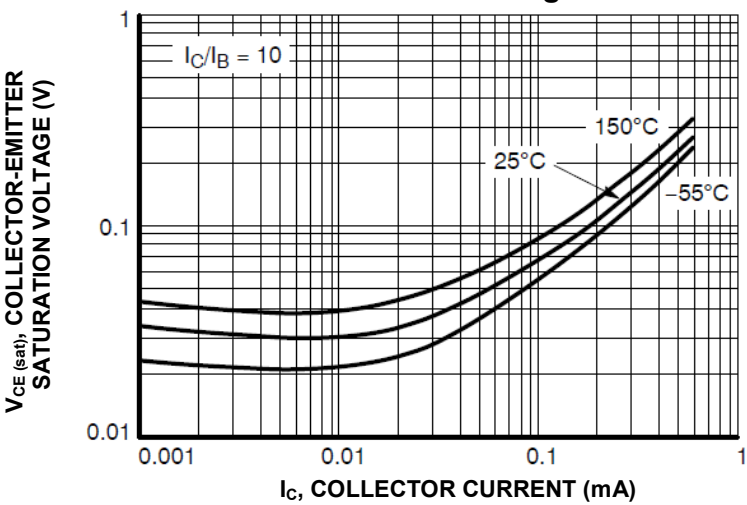


FIG.7 - Base emitter saturation voltage vs. collector current

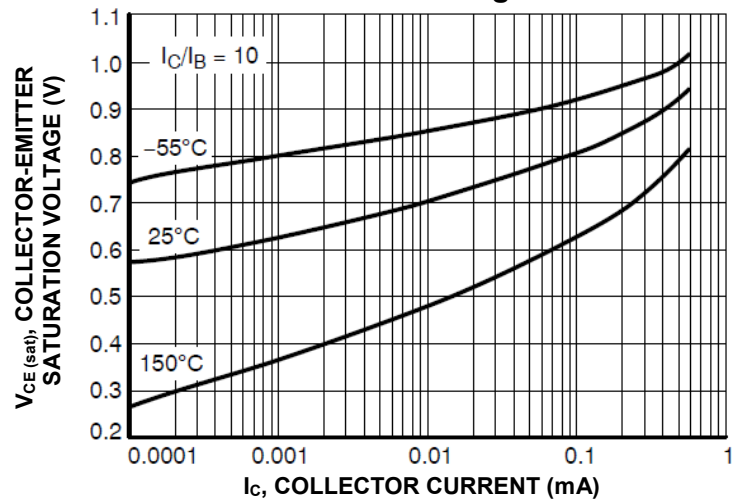


FIG.8 - Base emitter voltage vs. collector current

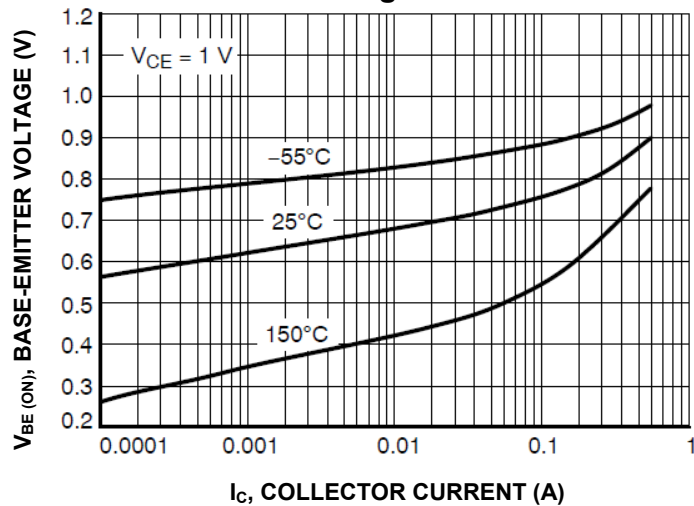


FIG.9 - Collector saturation region

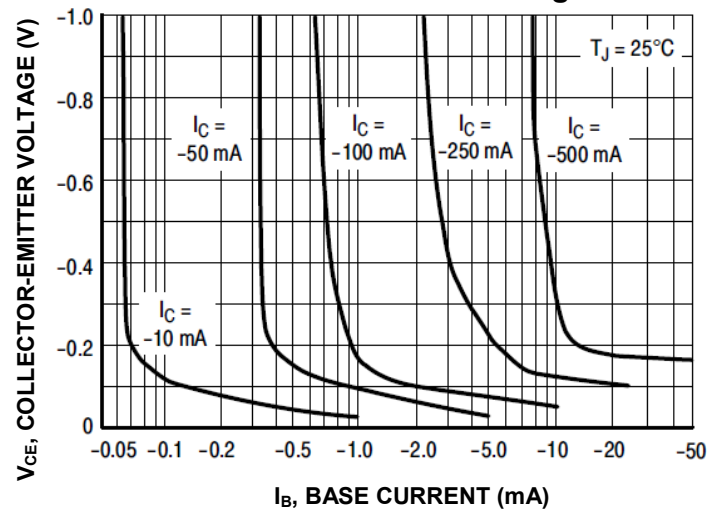


FIG.10 - Base-emitter temperature coefficient



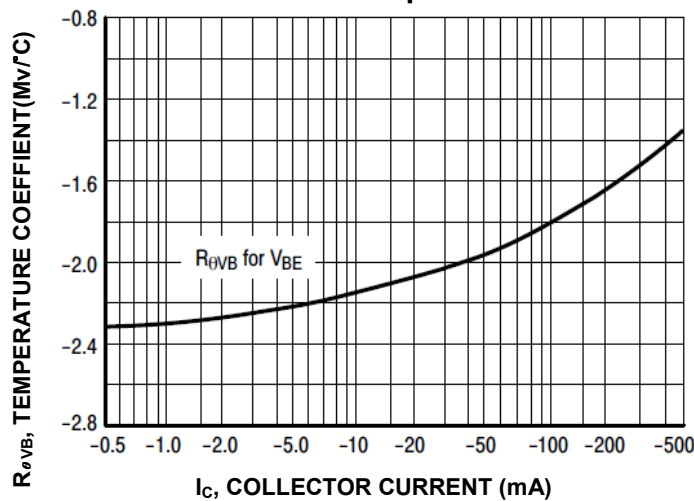


FIG.11 - Safe operating area

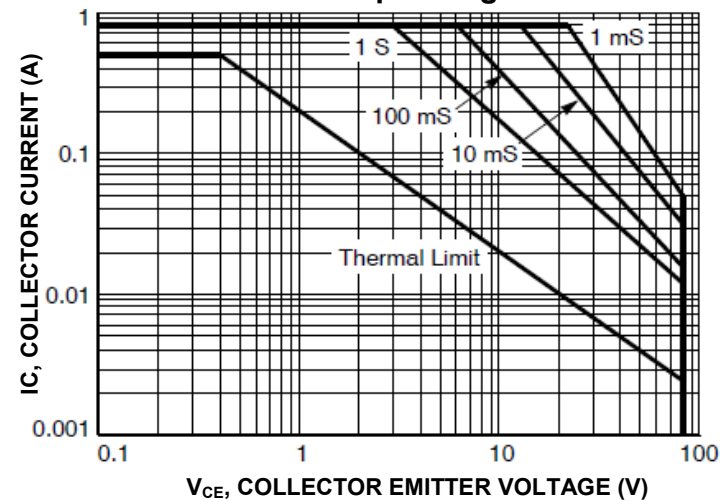

Package Dimensions :


SOT-23

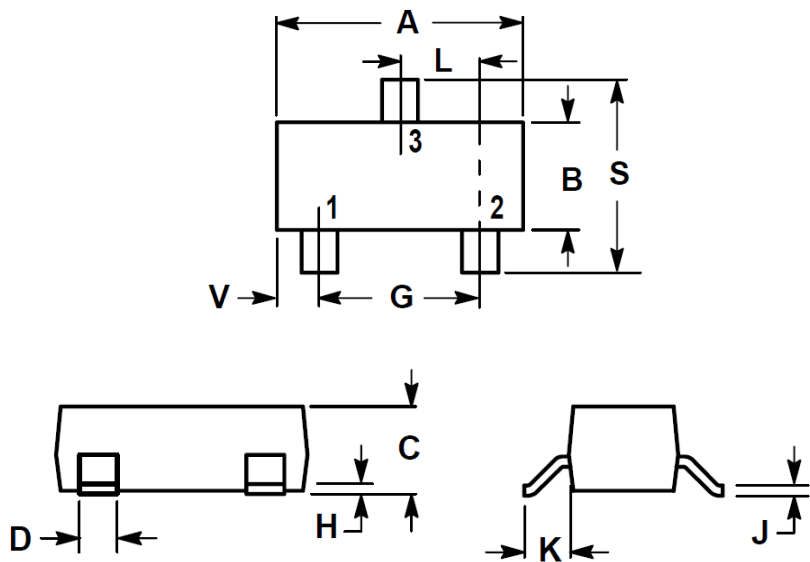

Dim.	INCHES		MILLIMETERS	
	Min.	Max.	Min.	Max.
A	0.1102	0.1197	2.80	3.04
B	0.0472	0.0551	1.20	1.40
C	0.0350	0.0440	0.89	1.11
D	0.0150	0.0200	0.37	0.50
G	0.0701	0.0807	1.78	2.04
H	0.0005	0.0040	0.013	0.100
J	0.0034	0.0070	0.085	0.177
K	0.0140	0.0285	0.35	0.69
L	0.0350	0.0401	0.89	1.02
S	0.0830	0.1039	2.10	2.64
V	0.0177	0.0236	0.45	0.60

- Pin:
1. BASE
2. EMITTER
3. COLLECTOR

Recommended Footprint :

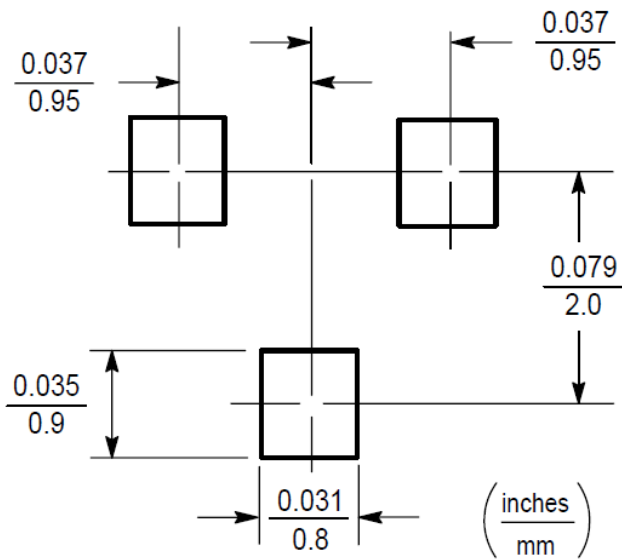

Important Notice and Disclaimer

LSC reserves the right to make changes to this document and its products and specifications at any time without notice. Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

LSC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does LSC assume any liability for application assistance or customer product design. LSC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of LSC.

LSC products are not authorized for use as critical components in life support devices or systems without express written approval of LSC.