



DESCRIPTION

The FMMT591 is available in SOT-23 package.

MECHANICAL DATA

- Case: SOT23
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208
- Weight 0.008 grams (Approximate)


ORDERING INFORMATION

Package Type	Part Number
SOT-23	FMMT591
Note	SPQ:3,000pcs/Reel
AiT provides all RoHS products	

FEATURE

- $I_C = -1A$ High Continuous Collector Current
- $I_{CM} = -2A$ Peak Pulse Current
- $R_{CE(sat)} = 355m\Omega$ for a Low Equivalent On-Resistance
- Complementary NPN type: FMMT491

PIN DESCRIPTION

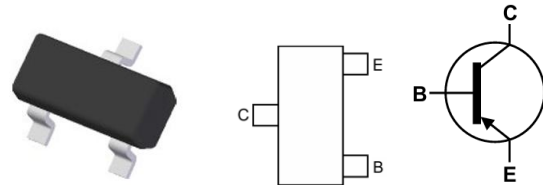

SOT-23

Pin#	Symbol	Function
1	B	Base
2	E	Emitter
3	C	Collector

ABSOLUTE MAXIMUM RATINGS

V_{CBO} , Collector-Base Voltage	-80V
V_{CEO} , Collector-Emitter Voltage	-60V
V_{EBO} , Emitter-Base Voltage	-5V
I_{CM} , Peak Pulse Current	-2A
I_C , Continuous Collector Current	-1A
I_B , Base Current	-200mA
P_{TOT} , Power Dissipation at $T_{amb} = 25^\circ C$	500mW
T_J , Operating and Storage Temperature Range	$-55^\circ C \sim +150^\circ C$
T_{STG} , Operating and Storage Temperature Range	$-55^\circ C \sim +150^\circ C$

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**ELECTRICAL CHARACTERISTICS**T_A = 25°C, unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Collector-Base Breakdown Voltage	V _{(BR)CBO}	I _C =-100μA, I _E =0	-80	-	-	V
Collector-Emitter Breakdown Voltage	V _{(BR)CEO}	I _C =-10mA, I _B =0*	-60	-	-	V
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	I _E =-100μA, I _C =0	-5	-	-	V
Collector Cut-Off Current	I _{CBO}	V _{CB} =-60V	-	-	-100	nA
Emitter Cut-Off Current	I _{EBO}	V _{EB} =-4V, I _C =0	-	-	-100	nA
Collector- Emitter Cut-Off Current	I _{CES}	V _{CES} =-60V	-	-	-100	nA
Collector- Emitter Saturation Voltage	V _{CE(sat)}	I _C =-500mA, I _B =-50mA*	-	-	-0.3	V
		I _C =-1A, I _B =-100mA*	-	-	-0.6	V
Base- Emitter Saturation Voltage	V _{BE(sat)}	I _C =-1A, I _B =-100mA*	-	-	-1.2	V
Base- Emitter Turn-on Voltage	V _{BE(on)}	I _C =-1A, V _{CE} =-5V*	-	-	-1.0	V
Static Forward Current Transfer Ratio	h _{FE}	I _C =-1mA, V _{CE} =-5V*	100	-	300	
		I _C =-500mA, V _{CE} =-5V*	100	-		
		I _C =-1A, V _{CE} =-5V*	80	-		
		I _C =-2A, V _{CE} =-5V*	15	-		
Transition Frequency	f _T	I _C =-50mA, V _{CE} =-10V f=100MHz	150	-	-	MHz
Output Capacitance	C _{obo}	V _{CB} =-10V, f=1MHz	-	-	10	pF

*Measured under pulsed conditions. Pulse width=300μs. Duty cycle≤2%



TYPICAL PERFORMANCE CHARACTERISTICS

Fig 1. $V_{CE(sat)}$ vs. I_C

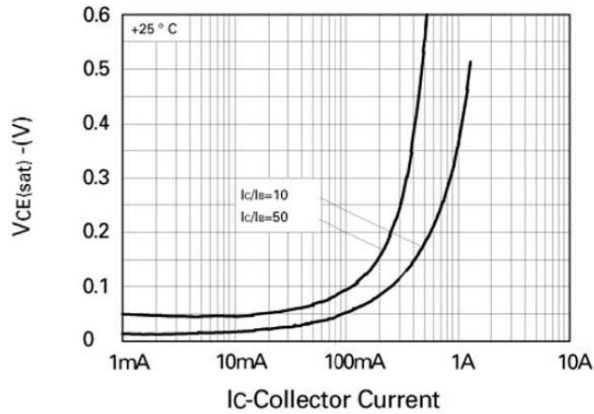


Fig 2. $V_{CE(sat)}$ vs. I_C

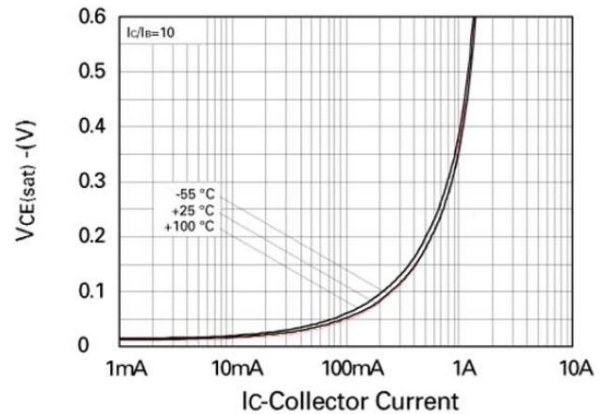


Fig3. h_{FE} vs. I_C

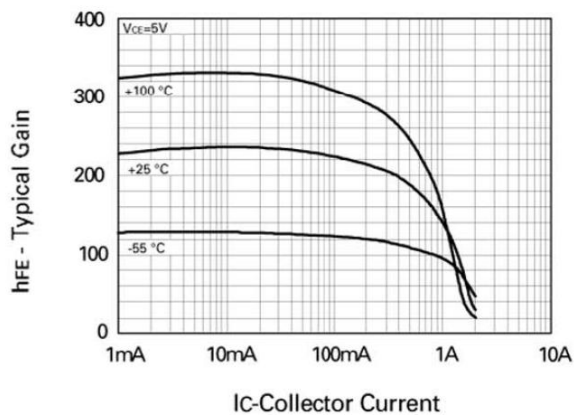


Fig4. $V_{BE(sat)}$ vs. I_C

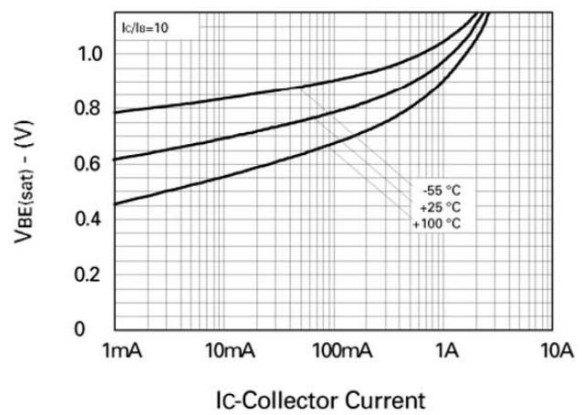


Fig5. $V_{BE(on)}$ vs. I_C


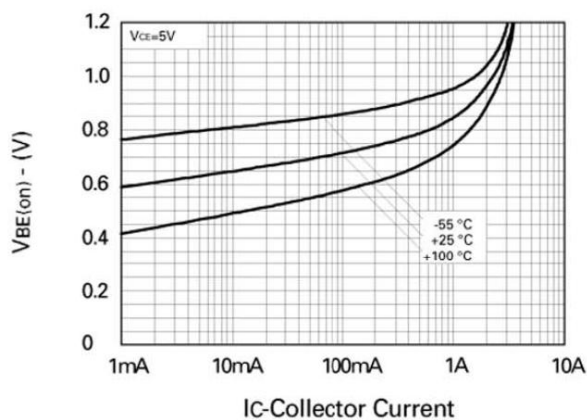



Fig6. Safe Operating Area



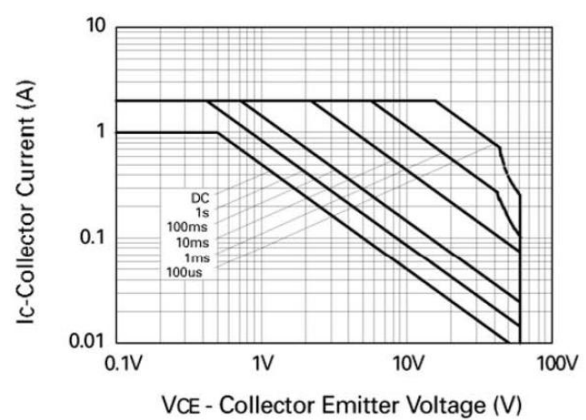

PACKAGE INFORMATION

Dimension in SOT-23 (Unit: mm)

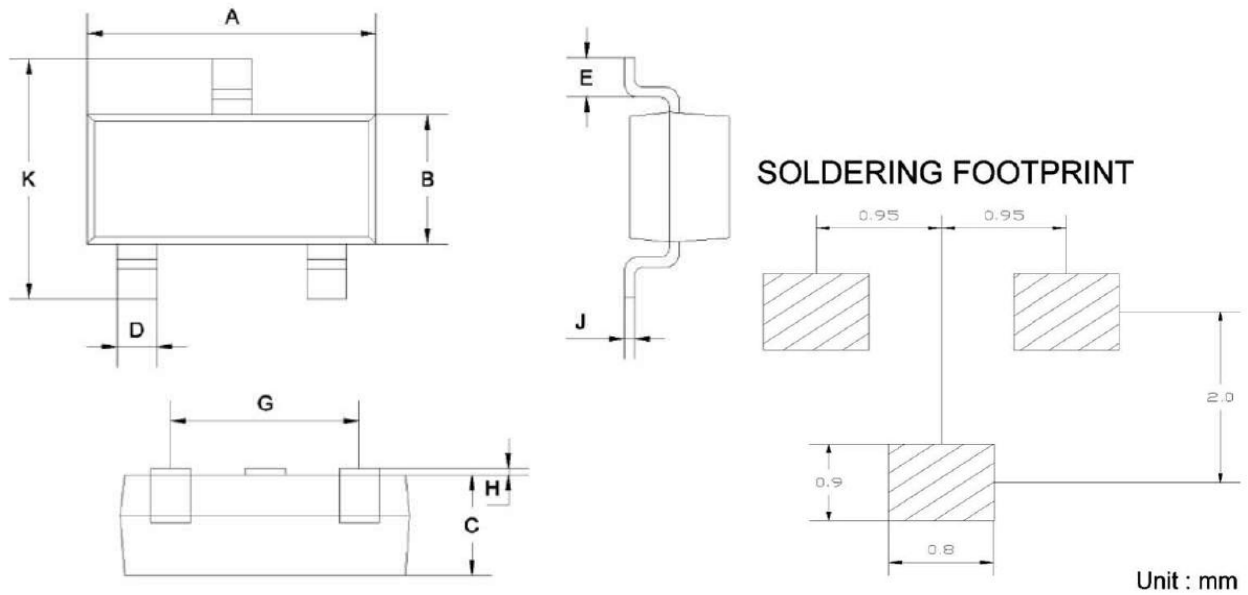

Symbol	Min	Max
A	2.85	2.95
B	1.25	1.35
C	1.0 Typical	
D	0.37	0.43
E	0.35	0.48
G	1.85	1.95
H	0.02	0.1
J	0.1 Typical	
K	2.35	2.45



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.