



SMD High Voltage Transistor (NPN)

Features

- NPN Silicon Epitaxial Planar Transistor for Switching and Amplifier Applications
- RoHS compliance



Mechanical Data

SOT-23



Case:	SOT-23, Plastic Package
Terminals:	Solderable per MIL-STD-202G, Method 208
Weight:	0.008 gram

Maximum Ratings ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Symbol	Description	MMBT5550	MMBT5551	Unit
	Marking Code	M1F	G1	
V_{CEO}	Collector-Emitter Voltage	140	160	V
V_{CBO}	Collector-Base Voltage	160	180	V
V_{EBO}	Emitter-Base Voltage	6.0		V
I_C	Collector Current-Continuous	600		mA

Thermal Characteristics

Symbol	Description	MMBT5550	MMBT5551	Unit
P_{tot}	Total Device Dissipation FR-5 Board, (Note 1) TA= 25°C	225		mW
	Derate above 25°C	1.8		mW/° C
R_{θJA}	Thermal Resistance from Junction to Ambient	556		° C/W
P_{tot}	Total Device Dissipation Alumina Substrate, (Note 2) TA= 25°C,	300		mW
	Derate above 25°C	2.4		mW/° C
R_{θJA}	Thermal Resistance from Junction to Ambient	417		° C/W
T_J, T_{STG}	Junction and Storage Temperature Range	-55 to +150		° C

SMD High Voltage Transistor (NPN)

MMBT5550/MMBT5551

Electrical Characteristics ($T_{Ambient}=25^{\circ}C$ unless noted otherwise)

Off Characteristics

Symbol	Description	MMBT5550		MMBT5551		Unit	Conditions
		Min.	Max.	Min.	Max.		
V_{(BR)CEO}	Collector-Emitter Breakdown Voltage (Note 3)	140	-	160	-	V	I _C =1mA, I _B =0
V_{(BR)CBO}	Collector-Base Breakdown Voltage	160	-	180	-	V	I _C =100μA, I _E =0
V_{(BR)EBO}	Emitter-Base Breakdown Voltage	6.0	-	6.0	-	V	I _E =10μA, I _C =0
I_{CBO}	Collector-Base Cut-off Current	-	100	-	50	nA	
		V _{CB} =100V, I _E =0		V _{CB} =120V, I _E =0			
		-	100	-	50	μA	V _{CB} =100V, I _E =0, T _A =100° C
I_{EBO}	Emitter-Base Cut-off Current	-	50	-	50	nA	V _{EB} =4V, I _C =0

On Characteristics

Symbol	Description	MMBT5550		MMBT5551		Unit	Conditions
		Min.	Max.	Min.	Max.		
h_{FE}	D.C. Current Gain	60	-	80	-		$V_{CE}=5V, I_C=1mA$
		60	250	80	250		$V_{CE}=5V, I_C=10mA$
		20	-	30	-		$V_{CE}=5V, I_C=50mA$
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	-	0.15	-	0.15	V	$I_C=10mA, I_B=1mA$
		-	0.25	-	0.20	V	$I_C=50mA, I_B=5mA$
$V_{BE(on)}$	Base-Emitter On Voltage	-	1.0	-	1.0	V	$I_C=10mA, I_B=1mA$
		-	1.2	-	1.0	V	$I_C=50mA, I_B=5mA$

Note: 1. FR-5=1.0x0.75x0.062 in.
 2. Alumina=0.4x0.3x0.024 in, 99.5% alumina.
 3. Pulse Test: Pulse Width=300 μ s, Duty Cycle=2.0%.

SMD High Voltage Transistor (NPN)

MMBT5550/MMBT5551

Typical Characteristics Curves

Fig.1- DC Current Gain


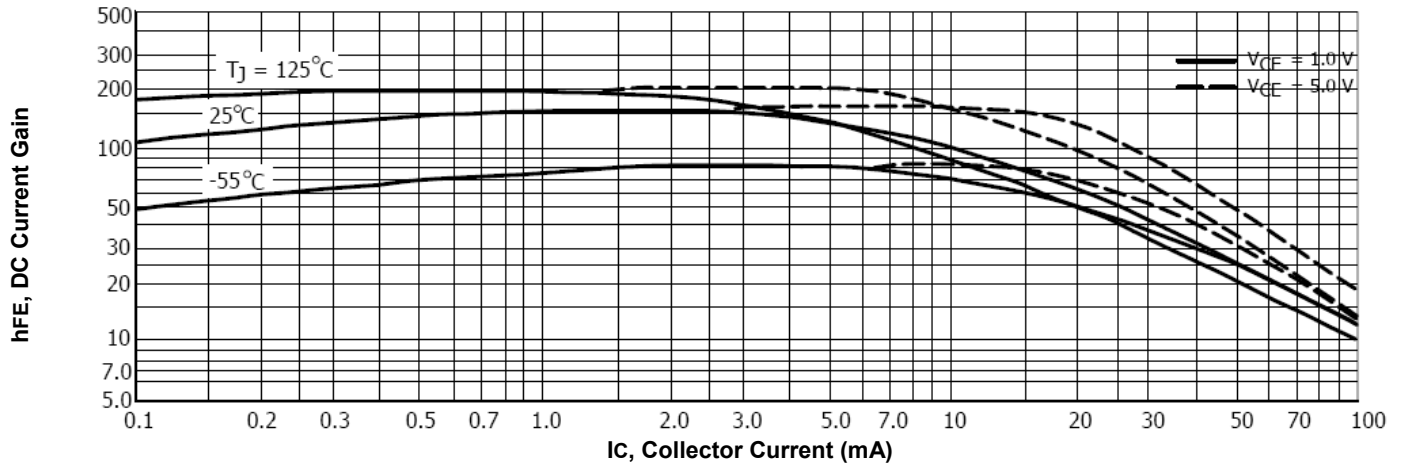


Fig.2- Collector Saturation Region

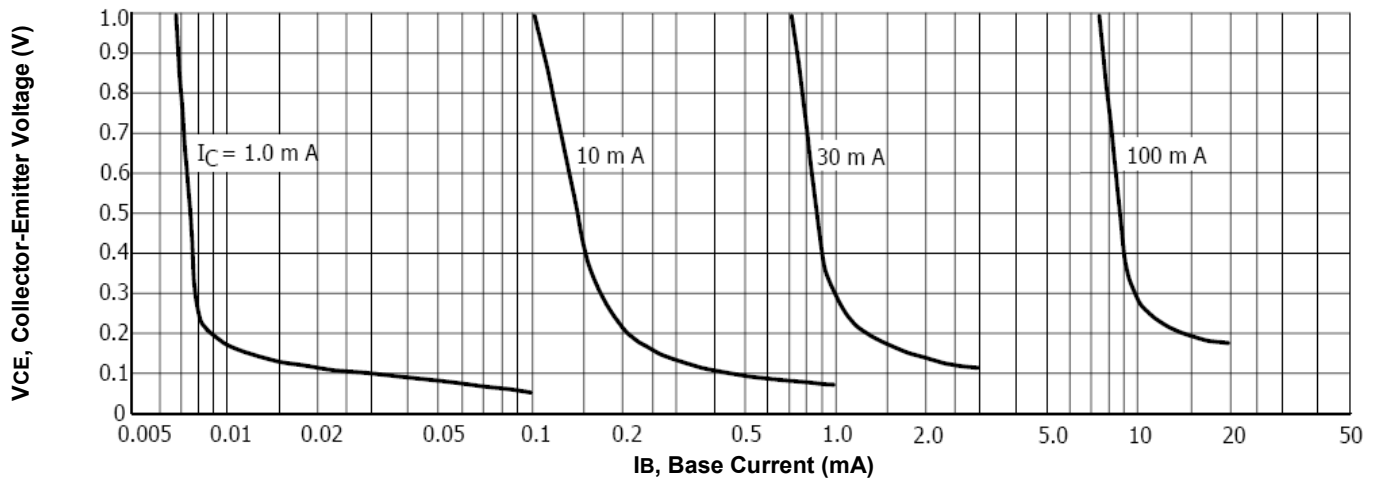

SMD High Voltage Transistor (NPN)

MMBT5550/MMBT5551

Fig.3- Collector Cut-off Region

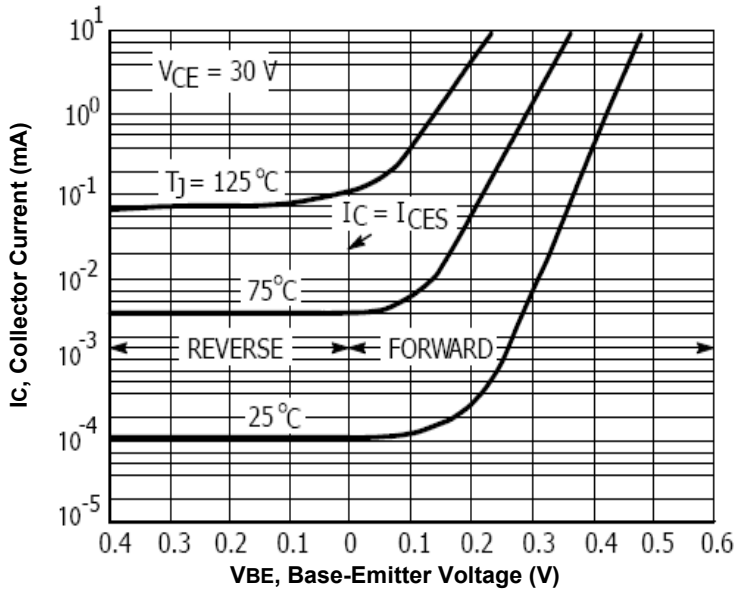


Fig.4- "ON" Voltages

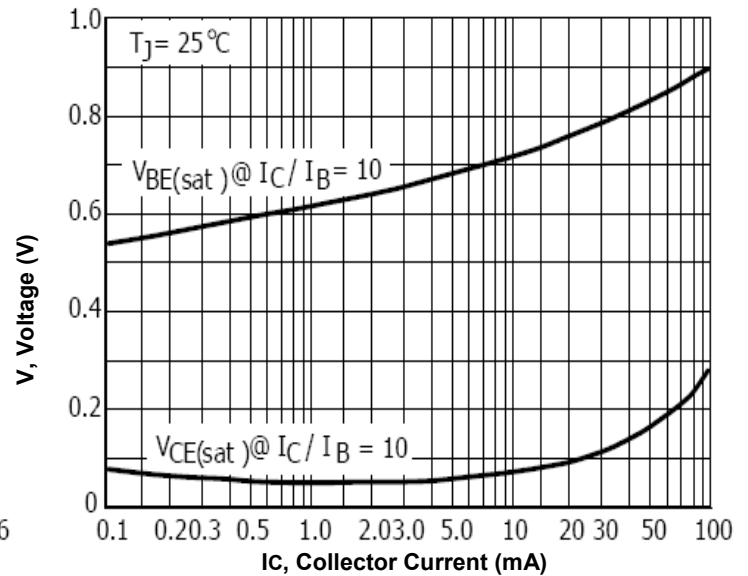


Fig.5- Temperature Coefficient


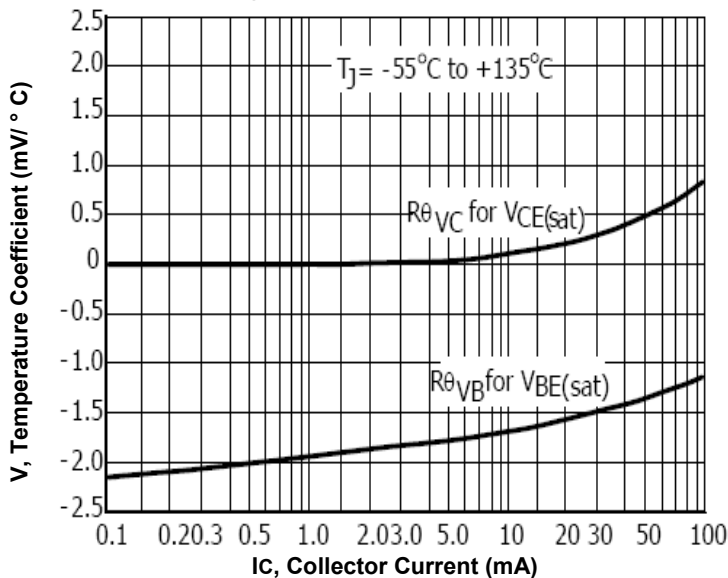


Fig.6-Switching Time Test Circuits

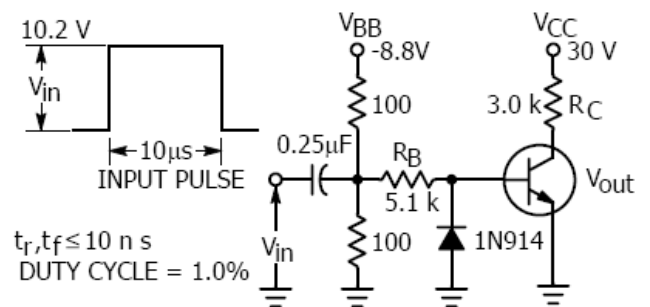

Values Shown are for $I_C @ 10\text{ mA}$

SMD High Voltage Transistor (NPN)

MMBT5550/MMBT5551

Fig.7- Capacitance

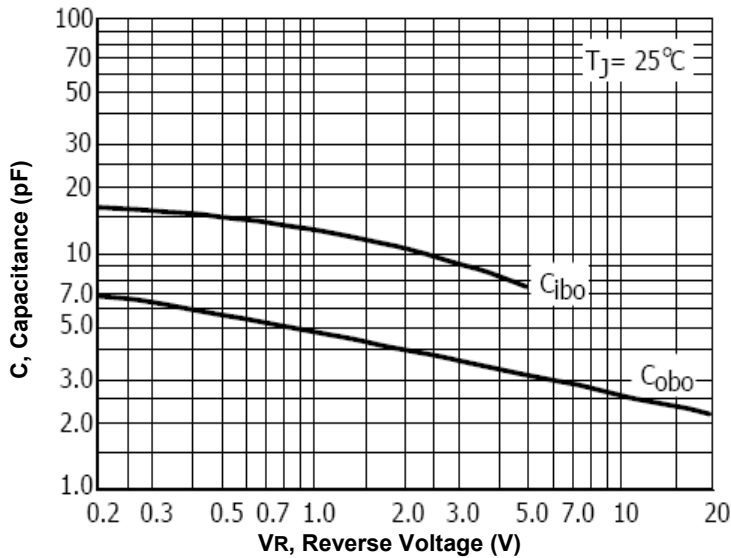


Fig.8- Turn-On Time


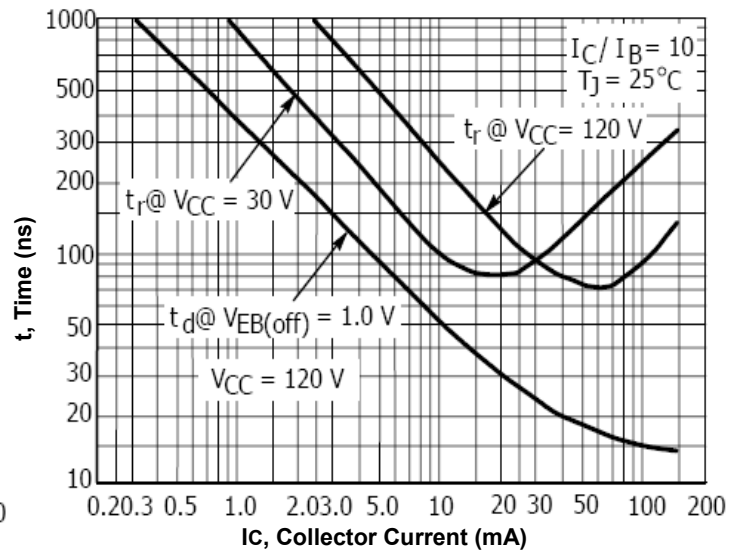


Fig.9- Turn-Off Time

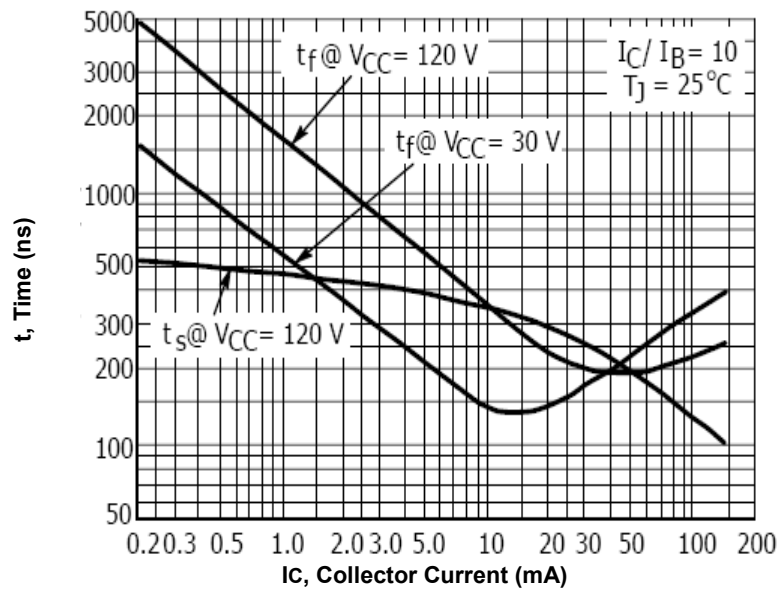


SMD High Voltage Transistor (NPN)

MMBT5550/MMBT5551

Dimensions in mm

SOT-23

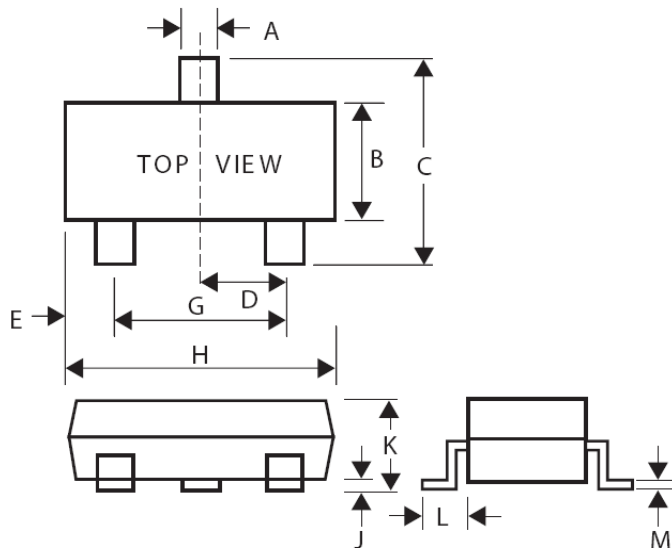

Dim	Min	Max
A	0.35	0.51
B	1.19	1.80
C	2.10	3.00
D	0.85	1.05
E	0.46	1.00
G	1.70	2.10
H	2.70	3.10
J	0.01	0.13
K	0.89	1.60
L	0.30	0.61
M	0.076	0.25

How to contact us:

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931

TAITRON
components incorporated