



Features

- Small collector to emitter saturation voltage
- Excellent linearity of DC forward gain
- Super mini package for easy mounting
- RoHS compliant with Halogen-free

HF



SOT-323

Mechanical Data

- Case: SOT-323
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
2SC4155A-Q	SOT-323	3000 pcs / Tape & Reel	QH
2SC4155A-R	SOT-323	3000 pcs / Tape & Reel	RH
2SC4155A-S	SOT-323	3000 pcs / Tape & Reel	SH

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Breakdown Voltage	V _{CB0}	50	V
Collector-Emitter Breakdown Voltage	V _{CEO}	50	V
Emitter-Base Breakdown Voltage	V _{EBO}	6	V
Continuous Collector Current	I _C	200	mA
Peak Collector Current	I _{CM}	200	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	200	mW
Thermal Resistance Junction-to-Air ^{*1}	R _{θJA}	320	°C/W
Thermal Resistance Junction-to-Case ^{*1}	R _{θJC}	180	°C/W
Thermal Resistance Junction-to-Lead ^{*1}	R _{θJL}	240	°C/W
Operating junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}, I_E = 0$	50	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 100\mu\text{A}, I_B = 0$	50	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}, I_C = 0$	6	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 50\text{V}, I_E = 0$	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	$V_{EB} = 4\text{V}, I_C = 0$	-	-	0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 6\text{V}, I_C = 1\text{mA}$	120	-	560	-
DC Current Gain	h_{FE}	$V_{CE} = 6\text{V}, I_C = 0.1\text{mA}$	70	-	-	-
Collector-emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 100\text{mA}, I_B = 10\text{mA}$	-	-	0.3	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 100\text{mA}, I_B = 10\text{mA}$	-	-	1.0	V
Transition Frequency	f_T	$I_C = -10\text{mA}, V_{CE} = 6\text{V}$	-	200	-	MHz
Output Capacitance	C_{ob}	$V_{CB} = 6\text{V}, I_E = 0\text{A}, f = 1\text{MHz}$	-	4	-	pF
Noise Figure	N_F	$V_{CE} = 6\text{V}, I_C = -0.1\text{mA}$ $f = 1\text{kHz}, R_G = 2\text{k}\Omega$	-	-	15	dB

Classification of h_{FE}

Rank	Q	R	S
Range	120 ~ 270	180 ~ 390	270 ~ 560
Marking	QH	RH	SH

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

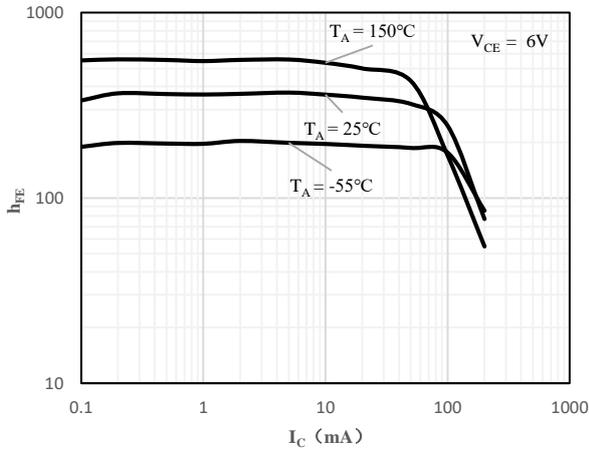


Fig 1 h_{FE} vs. I_C

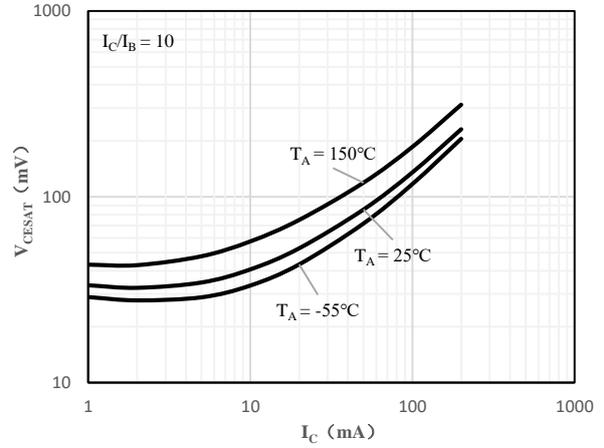


Fig 2 $V_{CE(sat)}$ vs. I_C

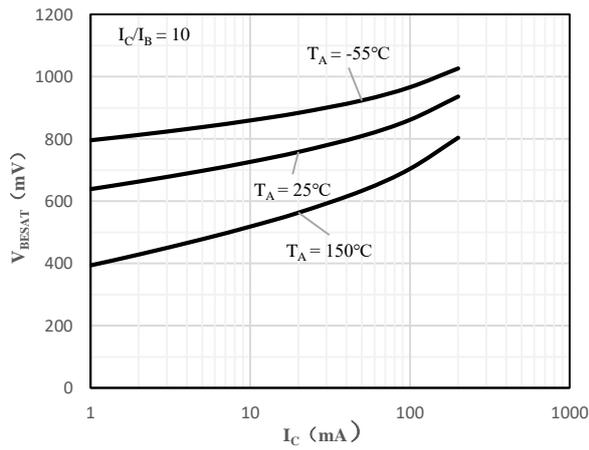


Fig 3 $V_{BE(sat)}$ vs. I_C

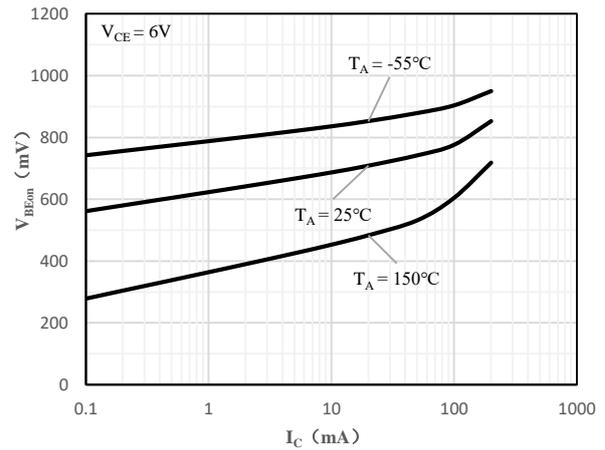


Fig 4 $V_{BE(on)}$ vs. I_C

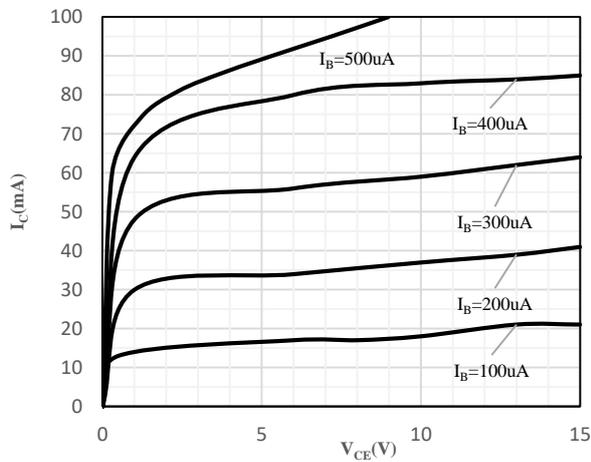


Fig 5 I_C vs. V_{CE}

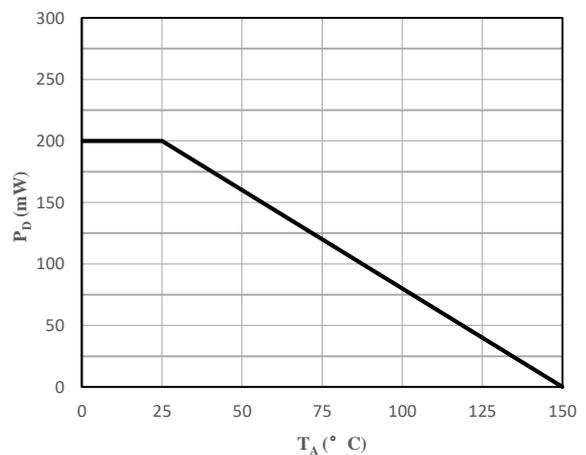


Fig 6 P_D vs. T_A


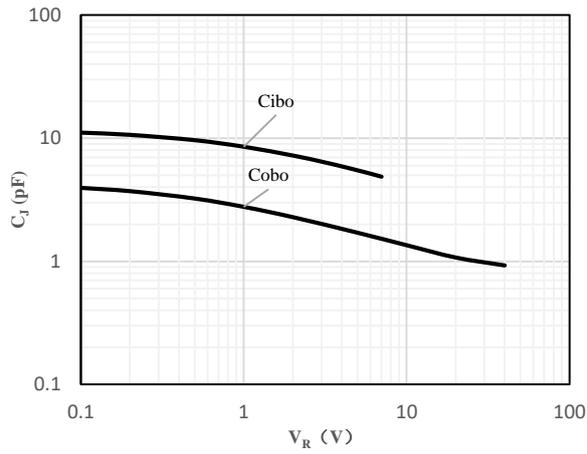


Fig 7 C_j vs. V_R

Package Outline Dimensions (Unit: mm)



Mounting Pad Layout (Unit: mm)

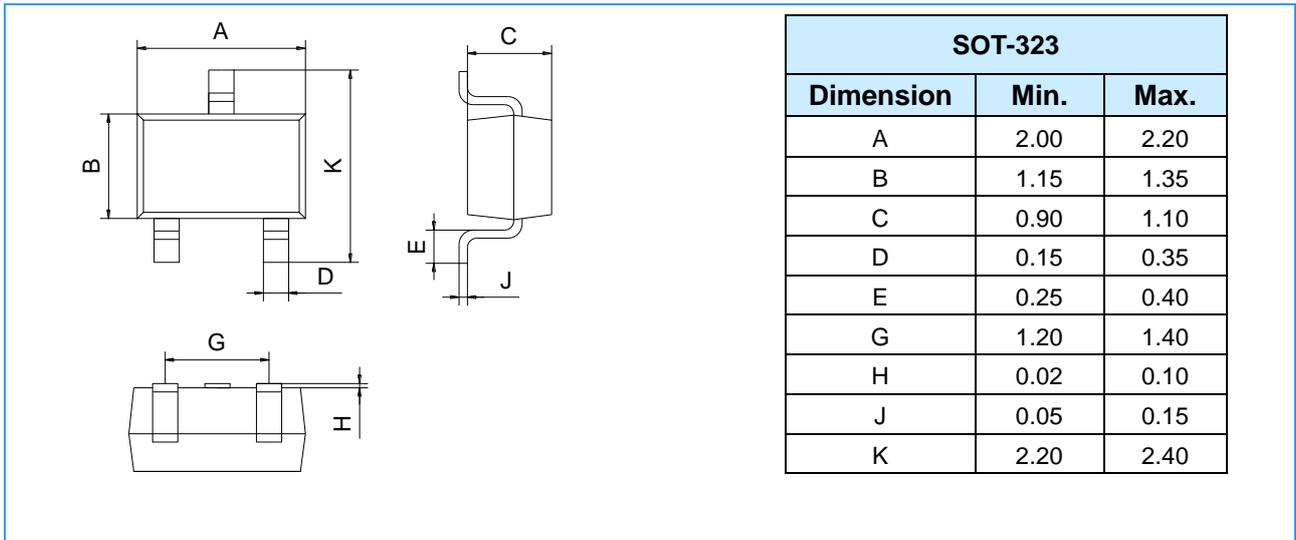