

RoHS Compliant Product

FEATURES

Power dissipation

$$P_{CM} : 0.2 \text{ W}$$

Collector Current

$$I_{CM} : -1.5 \text{ A}$$


Collector-base voltage

$$V_{(BR)CBO} : -40 \text{ V}$$

Operating & storage junction temperature

$$T_j, T_{stg} : -55^{\circ}\text{C} \sim +150^{\circ}\text{C}$$

Marking : Y2

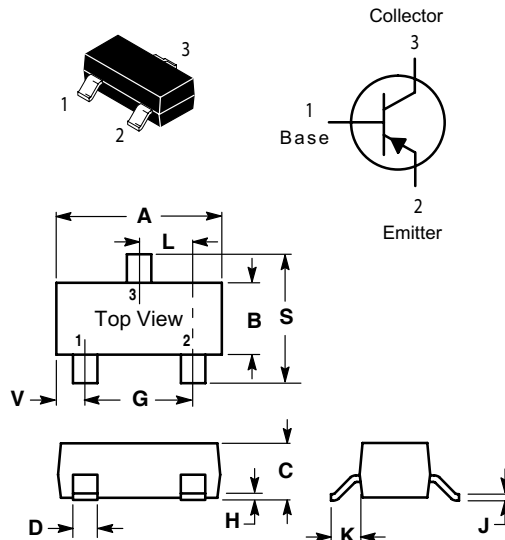

SOT-323		
Dim	Min	Max
A	1.800	2.200
B	1.150	1.350
C	0.800	1.000
D	0.300	0.400
G	1.200	1.400
H	0.000	0.100
J	0.100	0.250
K	0.350	0.500
L	0.590	0.720
S	2.000	2.400
V	0.280	0.420
All Dimension in mm		

ELECTRICAL CHARACTERISTICS (T_{amp} = 25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 100 \mu\text{A}, I_E = 0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C = -0.1\text{mA}, I_B = 0$	-25			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = -100 \mu\text{A}, I_C = 0$	-5			V
Collector cut-off current	I_{CBO}	$V_{CB} = -40 \text{ V}, I_E = 0$			-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE} = -20\text{V}, I_B = 0$			-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = -5\text{V}, I_C = 0$			-0.1	μA
DC current gain	$H_{FE(1)}$	$V_{CE} = -1\text{V}, I_C = -100\text{mA}$	120		350	
	$H_{FE(2)}$	$V_{CE} = -1\text{V}, I_C = -800\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = -800 \text{ mA}, I_B = -80\text{mA}$			-0.5	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = -800 \text{ mA}, I_B = -80\text{mA}$			-1.2	V
Transition frequency	f_T	$V_{CE} = -10\text{V}, I_C = -50\text{mA}$ $f = 30\text{MHz}$	100			MHz
output capacitance	C_{ob}	$(V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz})$			20	pF

CLASSIFICATION OF $h_{FE(1)}$

Rank	L	H
Range	120-200	200-350

Typical Characteristics

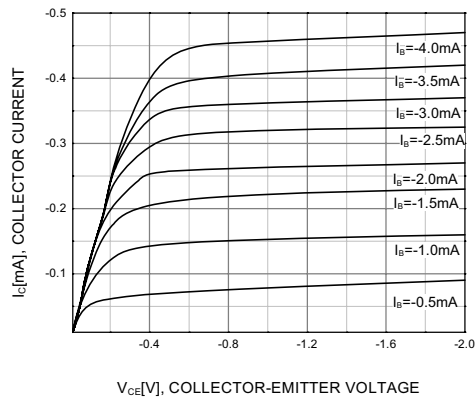


Figure 1. Static Characteristic

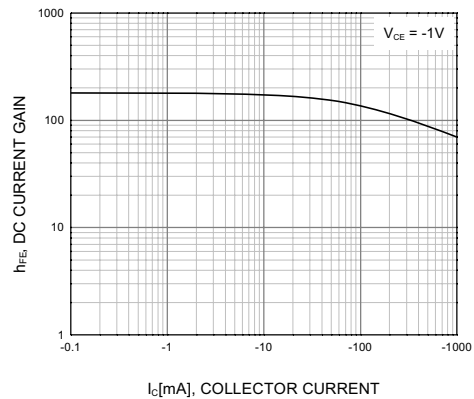


Figure 2. DC current Gain

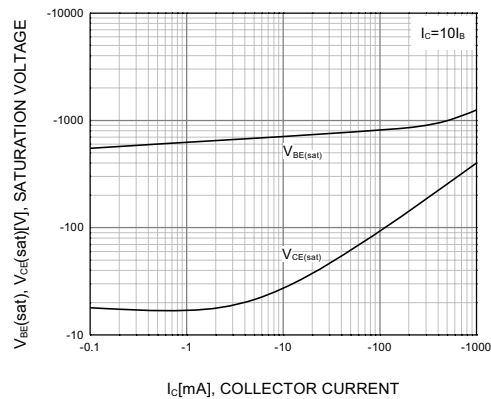


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

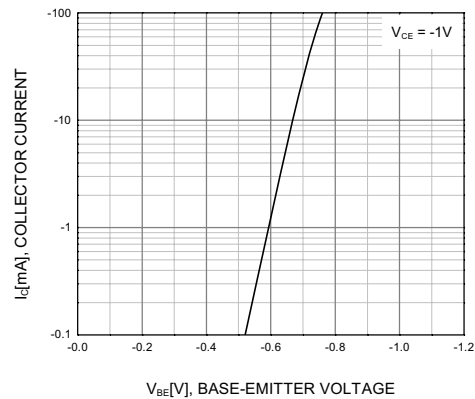


Figure 4. Base-Emitter On Voltage

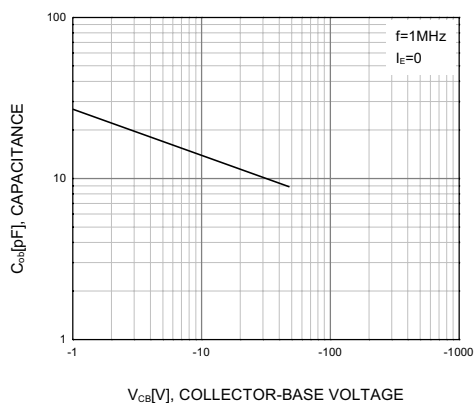


Figure 5. Collector Output Capacitance

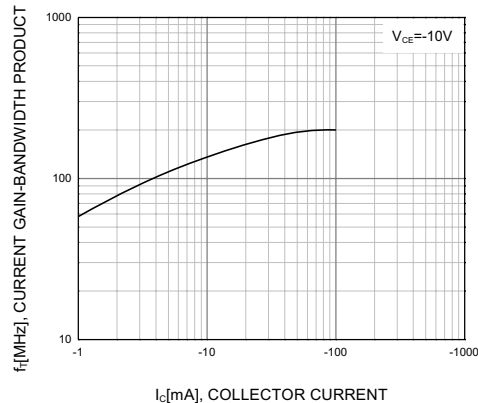


Figure 6. Current Gain Bandwidth Product