



VOLTAGE RANGE: 20 - 100V
CURRENT: 6.0 A

Features

- Schottky Barrier Chip
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- For Use in Low Voltage Application
- Guard Ring Die Construction
- Plastic Case Material has UL Flammability Classification Rating 94V-O

Mechanical Data

- Case: SMC/DO-214AB, Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Marking: Type Number
- Weight: 0.21 grams (approx.)

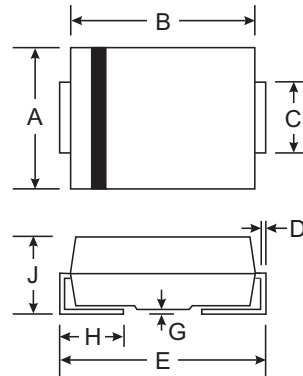

SMC/DO-214AB		
Dim	Min	Max
A	5.59	6.22
B	6.60	7.11
C	2.75	3.18
D	0.15	0.31
E	7.75	8.13
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Characteristic	Symbol	SS62	SS63	SS64	SS65	SS66	SS68	SS69	SS610	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{VRWM} V _R	20	30	40	50	60	80	90	100	V
RMS Reverse Voltage	V _R (RMS)	14	21	28	35	42	56	64	71	V
Average Rectified Output Current @T _L = 90°C	I _O	6.0								A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150								A
Forward Voltage @I _F = 6.0A	V _F	0.55			0.70		0.85			V
Peak Reverse Current @T _A = 25°C	I _{RM}	1.0								mA
Typical Thermal Resistance (Note 1)	R _θ JL R _θ JA	17 55								°C/W
Operating Temperature Range	T _j	-65 to +125								°C
Storage Temperature Range	T _{STG}	-65 to +150								°C
Typical Junction capacitance(NOTE1)	C _J	300								PF

Note: 1. Mounted on P.C. Board with 14mm² copper pad area.

2. Measured at 1.0 MHz and applied reverse voltage of 4.0 V

RATINGS AND CHARACTERISTIC CURVE SS62 THRU SS610

FIG. 1 - FORWARD CURRENT DERATING CURVE

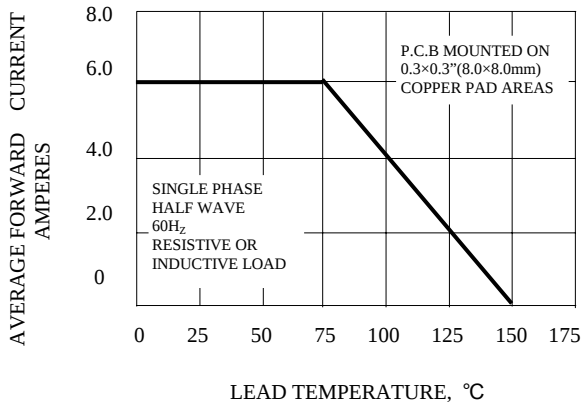


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

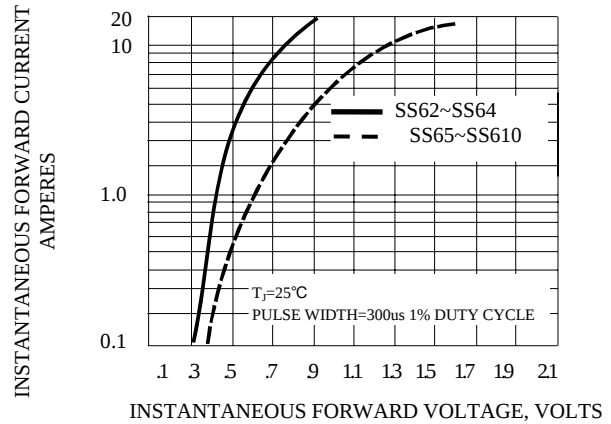


FIG. 3A - TYPICAL REVERSE CHARACTERISTICS

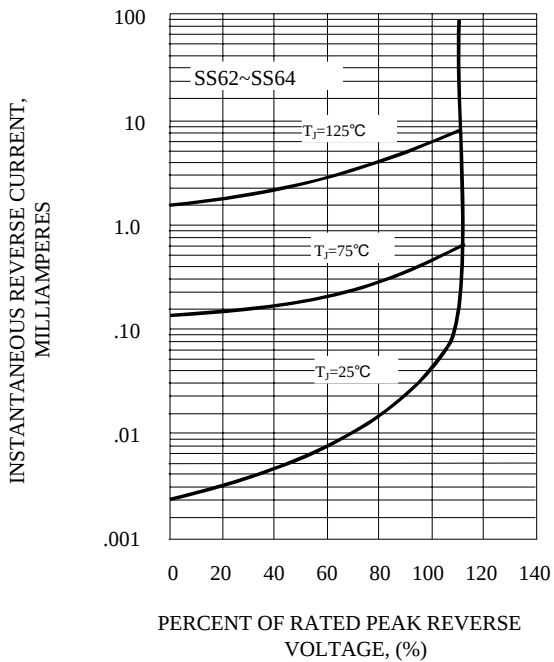


FIG. 3B - TYPICAL REVERSE CHARACTERISTICS

