

1N5221B-1N5279B

Zener Diodes


POWER DISSIPATION: 500 mW

DO-35(GLASS)



Features

- ◇ Silicon planar power zener diodes
- ◇ Standard Zener voltage tolerance is $\pm 5\%$. With a "B" suffix. Other tolerances are available upon request.

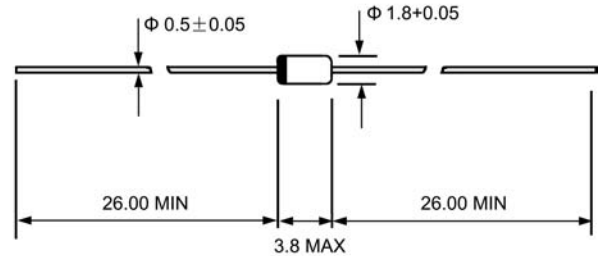

Mechanical Data

- ◇ Case: DO-35, Glass Case
- ◇ Terminals: Solderable per MIL-STD-202, Method 208
- ◇ Polarity: Cathode Band
- ◇ Marking: Type Number
- ◇ Approx. Weight: 0.13 grams.

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

| | SYMBOL | VALUE | UNIT |
|---|-----------|--------------------|------|
| Zener current (see Table "Characteristics") | | | |
| Power dissipation at $T_{amb}=25^{\circ}\text{C}$ | P_{tot} | 500 ⁽¹⁾ | mW |
| Junction temperature | T_J | 175 | °C |
| Storage temperature range | T_s | -55—+175 | °C |

| | SYMBOL | MIN | TYP | MAX | UNIT |
|--|-----------------|-----|-----|--------------------|------|
| Thermal resistance junction to ambient | $R_{\theta JA}$ | — | — | 300 ⁽¹⁾ | °C/W |
| Forward voltage at $I_F=200\text{mA}$ | V_F | — | — | 1.2 | V |

NOTES: (1) Valid provided that leads at a distance of 10 mm from case are kept at ambient temperature.



1N5221B-1N5279B

Zener Diodes

ELECTRICAL CHARACTERISTICS (T_A=25 °C)

| Type | Nominal Zener Voltage ¹⁾ | Test Current | Maximum Dynamic Impedance ¹⁾ | | Typical Temperature of Coefficient | Maximum Reverse Leakage Current | |
|---------|-------------------------------------|-----------------|---|--|------------------------------------|---------------------------------|----------------|
| | V _Z | I _{ZT} | Z _{ZT} @I _{ZT} | Z _{ZK} @ I _{ZK} =0.25mA | αV _Z @I _{ZT} | I _{RM} | V _R |
| | V | mA | Ω | Ω | %/ | μA | V |
| 1N5221B | 2.4 | 20 | 30 | 1200 | -0.085 | 100 | 1.0 |
| 1N5222B | 2.5 | 20 | 30 | 1250 | -0.085 | 100 | 1.0 |
| 1N5223B | 2.7 | 20 | 30 | 1300 | -0.080 | 75 | 1.0 |
| 1N5224B | 2.8 | 20 | 30 | 1400 | -0.080 | 75 | 1.0 |
| 1N5225B | 3.0 | 20 | 29 | 1600 | -0.075 | 50 | 1.0 |
| 1N5226B | 3.3 | 20 | 28 | 1600 | -0.070 | 25 | 1.0 |
| 1N5227B | 3.6 | 20 | 24 | 1700 | -0.065 | 15 | 1.0 |
| 1N5228B | 3.9 | 20 | 23 | 1900 | -0.060 | 10 | 1.0 |
| 1N5229B | 4.3 | 20 | 22 | 2000 | -0.055 | 5.0 | 1.0 |
| 1N5230B | 4.7 | 20 | 19 | 1900 | + 0.030 | 5.0 | 2.0 |
| 1N5231B | 5.1 | 20 | 17 | 1600 | + 0.030 | 5.0 | 2.0 |
| 1N5232B | 5.6 | 20 | 11 | 1600 | + 0.038 | 5.0 | 3.0 |
| 1N5233B | 6.0 | 20 | 7.0 | 1600 | + 0.038 | 5.0 | 3.5 |
| 1N5234B | 6.2 | 20 | 7.0 | 1000 | + 0.045 | 5.0 | 4.0 |
| 1N5235B | 6.8 | 20 | 5.0 | 750 | + 0.050 | 3.0 | 5.0 |
| 1N5236B | 7.5 | 20 | 6.0 | 500 | + 0.058 | 3.0 | 6.0 |
| 1N5237B | 8.2 | 20 | 8.0 | 500 | + 0.062 | 3.0 | 6.5 |
| 1N5238B | 8.7 | 20 | 8.0 | 600 | + 0.065 | 3.0 | 6.5 |
| 1N5239B | 9.1 | 20 | 10 | 600 | + 0.068 | 3.0 | 7.0 |
| 1N5240B | 10 | 20 | 17 | 600 | + 0.075 | 3.0 | 8.0 |
| 1N5241B | 11 | 20 | 22 | 600 | + 0.076 | 2.0 | 8.4 |
| 1N5242B | 12 | 20 | 30 | 600 | + 0.077 | 1.0 | 9.1 |
| 1N5243B | 13 | 10 | 13 | 600 | + 0.079 | 0.5 | 9.9 |
| 1N5244B | 14 | 9.0 | 15 | 600 | + 0.082 | 0.1 | 10 |
| 1N5245B | 15 | 8.5 | 16 | 600 | + 0.082 | 0.1 | 11 |
| 1N5246B | 16 | 7.8 | 17 | 600 | + 0.083 | 0.1 | 12 |
| 1N5247B | 17 | 7.4 | 19 | 600 | + 0.084 | 0.1 | 13 |
| 1N5248B | 18 | 7.0 | 21 | 600 | + 0.085 | 0.1 | 14 |
| 1N5249B | 19 | 6.6 | 23 | 600 | + 0.086 | 0.1 | 14 |
| 1N5250B | 20 | 6.2 | 25 | 600 | + 0.086 | 0.1 | 15 |
| 1N5251B | 22 | 5.6 | 29 | 600 | + 0.087 | 0.1 | 17 |
| 1N5252B | 24 | 5.2 | 33 | 600 | + 0.087 | 0.1 | 18 |
| 1N5253B | 25 | 5.0 | 35 | 600 | + 0.089 | 0.1 | 19 |
| 1N5254B | 27 | 4.6 | 41 | 600 | + 0.090 | 0.1 | 21 |
| 1N5255B | 28 | 4.5 | 44 | 600 | + 0.091 | 0.1 | 21 |
| 1N5256B | 30 | 4.2 | 49 | 600 | + 0.091 | 0.1 | 23 |
| 1N5257B | 33 | 3.8 | 58 | 700 | + 0.092 | 0.1 | 25 |
| 1N5258B | 36 | 3.4 | 70 | 700 | + 0.093 | 0.1 | 27 |
| 1N5259B | 39 | 3.2 | 80 | 800 | + 0.094 | 0.1 | 30 |
| 1N5260B | 43 | 3.0 | 93 | 900 | + 0.095 | 0.1 | 33 |
| 1N5261B | 47 | 2.7 | 105 | 1000 | + 0.095 | 0.1 | 36 |
| 1N5262B | 51 | 2.5 | 125 | 1100 | + 0.096 | 0.1 | 39 |
| 1N5263B | 56 | 2.2 | 150 | 1300 | + 0.096 | 0.1 | 43 |
| 1N5264B | 60 | 2.1 | 170 | 1400 | + 0.097 | 0.1 | 46 |
| 1N5265B | 62 | 2.0 | 185 | 1400 | + 0.097 | 0.1 | 47 |
| 1N5266B | 68 | 1.8 | 230 | 1600 | + 0.097 | 0.1 | 52 |
| 1N5267B | 75 | 1.7 | 270 | 1700 | + 0.098 | 0.1 | 56 |
| 1N5268B | 85 | 1.5 | 330 | 2000 | + 0.098 | 0.1 | 62 |
| 1N5269B | 87 | 1.4 | 370 | 2200 | + 0.099 | 0.1 | 68 |
| 1N5270B | 91 | 1.4 | 400 | 2300 | + 0.099 | 0.1 | 69 |
| 1N5271B | 100 | 1.3 | 500 | 2600 | + 0.099 | 0.1 | 76 |
| 1N5272B | 110 | 1.1 | 750 | 3000 | + 0.11 | 0.1 | 84 |
| 1N5273B | 120 | 1.0 | 900 | 4000 | + 0.11 | 0.1 | 91 |
| 1N5274B | 130 | 0.95 | 1100 | 4500 | + 0.11 | 0.1 | 99 |
| 1N5275B | 140 | 0.90 | 1300 | 4500 | + 0.11 | 0.1 | 106 |
| 1N5276B | 150 | 0.95 | 1500 | 5000 | + 0.11 | 0.1 | 114 |
| 1N5277B | 160 | 0.80 | 1700 | 5500 | + 0.11 | 0.1 | 122 |
| 1N5278B | 170 | 0.74 | 1900 | 5500 | + 0.11 | 0.1 | 129 |
| 1N5279B | 180 | 0.68 | 2200 | 6000 | + 0.11 | 0.1 | 137 |

¹⁾Based on dc-measurement at thermal equilibrium; lead length=9.5(3/8");thermal resistance of heat sink=30K/W

Ratings AND Characteristic Curves

FIG.1 – BREAKDOWN CHARACTERISTICS

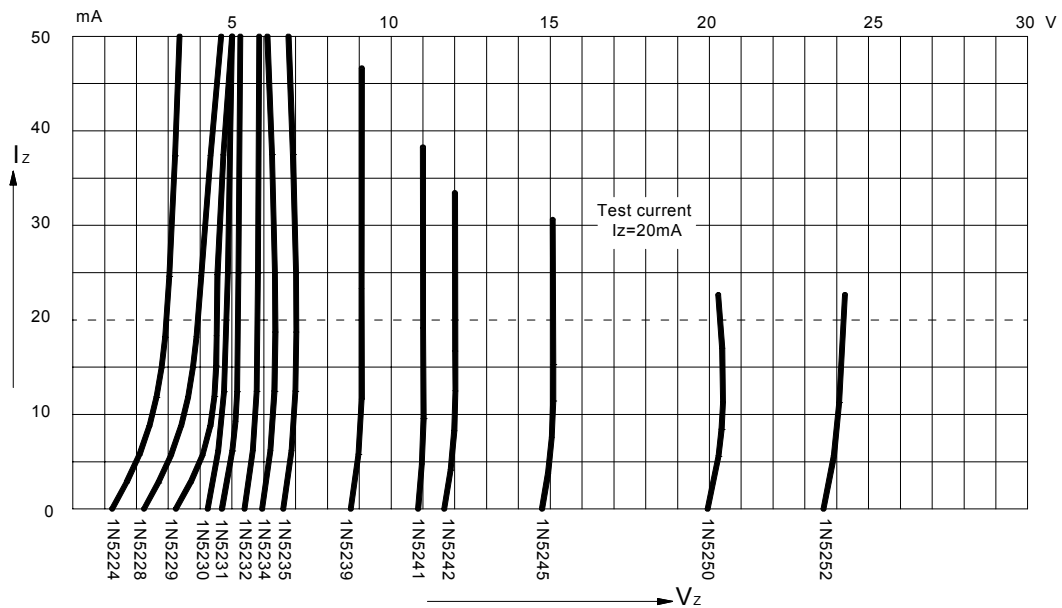


FIG.2 – ADMISSIBLE POWER DISSIPATION VERSUS AMBIENT TEMPERATURE

