

## MicroCapacitance (MC) SC SIDACtor Device



The DO-214AA SC MC *SIDACtor* series is intended for applications sensitive to load values. Typically, high speed connections require a lower capacitance.  $C_O$  values for the MicroCapacitance device are 40% lower than a standard SC part.

This MC *SIDACtor* series is used to enable equipment to meet various regulatory requirements including GR 1089, IEC 60950, UL 60950, and TIA-968-A (formerly known as FCC Part 68). Contact factory regarding ITU K.20, K.21, and K.45.

### Electrical Parameters

| Part Number * | $V_{DRM}$<br>Volts | $V_S$<br>Volts | $V_T$<br>Volts | $I_{DRM}$<br>$\mu$ Amps | $I_S$<br>mAmps | $I_T$<br>Amps | $I_H$<br>mAmps | $C_O$<br>pF |
|---------------|--------------------|----------------|----------------|-------------------------|----------------|---------------|----------------|-------------|
| P0080SC MC    | 6                  | 25             | 4              | 5                       | 800            | 2.2           | 50             | 55          |
| P0300SC MC    | 25                 | 40             | 4              | 5                       | 800            | 2.2           | 50             | 35          |
| P0640SC MC    | 58                 | 77             | 4              | 5                       | 800            | 2.2           | 150            | 60          |
| P0720SC MC    | 65                 | 88             | 4              | 5                       | 800            | 2.2           | 150            | 60          |
| P0900SC MC    | 75                 | 98             | 4              | 5                       | 800            | 2.2           | 150            | 60          |
| P1100SC MC    | 90                 | 130            | 4              | 5                       | 800            | 2.2           | 150            | 50          |
| P1300SC MC    | 120                | 160            | 4              | 5                       | 800            | 2.2           | 150            | 50          |
| P1500SC MC    | 140                | 180            | 4              | 5                       | 800            | 2.2           | 150            | 50          |
| P1800SC MC    | 170                | 220            | 4              | 5                       | 800            | 2.2           | 150            | 40          |
| P2300SC MC    | 190                | 260            | 4              | 5                       | 800            | 2.2           | 150            | 40          |
| P2600SC MC    | 220                | 300            | 4              | 5                       | 800            | 2.2           | 150            | 40          |
| P3100SC MC    | 275                | 350            | 4              | 5                       | 800            | 2.2           | 150            | 40          |
| P3500SC MC    | 320                | 400            | 4              | 5                       | 800            | 2.2           | 150            | 40          |

\* For surge ratings, see table below.


### General Notes:

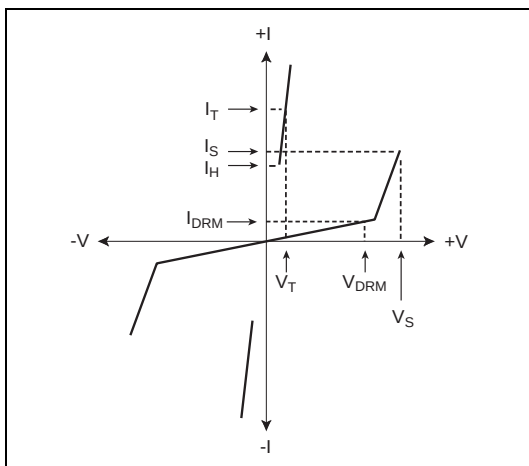
- All measurements are made at an ambient temperature of 25 °C.  $I_{PP}$  applies to -40 °C through +85 °C temperature range.
- $I_{PP}$  is a repetitive surge rating and is guaranteed for the life of the product.
- Listed *SIDACtor* devices are bi-directional. All electrical parameters and surge ratings apply to forward and reverse polarities.
- $V_{DRM}$  is measured at  $I_{DRM}$ .
- $V_S$  is measured at 100 V/ $\mu$ s.
- Special voltage ( $V_S$  and  $V_{DRM}$ ) and holding current ( $I_H$ ) requirements are available upon request.
- Off-state capacitance ( $C_O$ ) is measured at 1 MHz with a 2 V bias.

### Surge Ratings

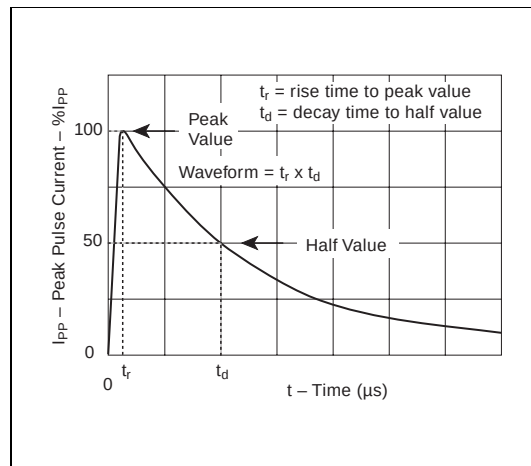
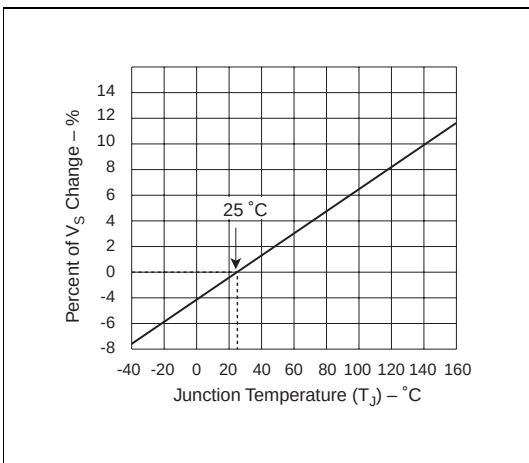
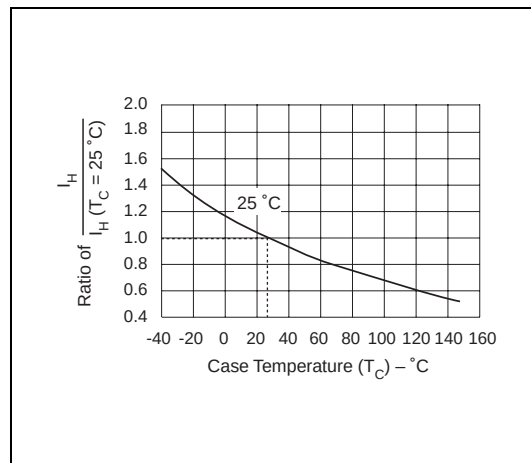
| Series | $I_{PP}$<br>2x10 $\mu$ s<br>Amps | $I_{PP}$<br>8x20 $\mu$ s<br>Amps | $I_{PP}$<br>10x160 $\mu$ s<br>Amps | $I_{PP}$<br>10x560 $\mu$ s<br>Amps | $I_{PP}$<br>10x1000 $\mu$ s<br>Amps | $I_{TSM}$<br>60 Hz<br>Amps | di/dt<br>Amps/ $\mu$ s |
|--------|----------------------------------|----------------------------------|------------------------------------|------------------------------------|-------------------------------------|----------------------------|------------------------|
| C      | 500                              | 400                              | 200                                | 150                                | 100                                 | 30                         | 500                    |

## Thermal Considerations

| Package                                                                           | Symbol          | Parameter                               | Value       | Unit |
|-----------------------------------------------------------------------------------|-----------------|-----------------------------------------|-------------|------|
|  | $T_J$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|                                                                                   | $T_S$           | Storage Temperature Range               | -65 to +150 | °C   |
|                                                                                   | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 90          | °C/W |



V-I Characteristics

 $t_r \times t_d$  Pulse Wave-formNormalized  $V_S$  Change versus Junction Temperature

Normalized DC Holding Current versus Case Temperature

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[P2600SCLRP](#) [P3100SALRP](#)