

Kingtronics®**W005 THRU W10**

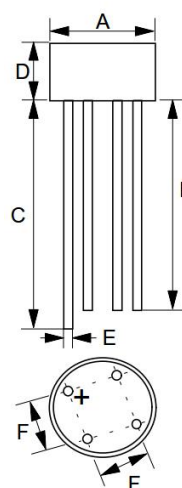
SINGLE-PHASE GLASS PASSIVATED BRIDGE RECTIFIERS
REVERSE VOLTAGE 50 to 1000 Volts FORWARD CURRENT 1.5 Ampere

FEATURES

Rating to 1000VPRV.
 Ideal for printed circuit board.
 Low forward voltage drop, high current capability.
 Reliable low cost construction utilizing molded epoxy technique results in inexpensive product.
 The plastic material has UL flammability classification 94V-0.

MECHANICAL DATA

Case: Molded plastic.
 Polarity: As marked on Body.
 Weight: 0.05 ounces, 1.42grams.
 Mounting position: Any.

WOB

WOB		
DIM.	MIN.	MAX.
A	8.90	9.30
B	25.4	—
C	27.9	—
D	5.10	5.60
E	0.70	0.80
F	4.60	5.60
All Dimensions in millimeter		

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified ,
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%

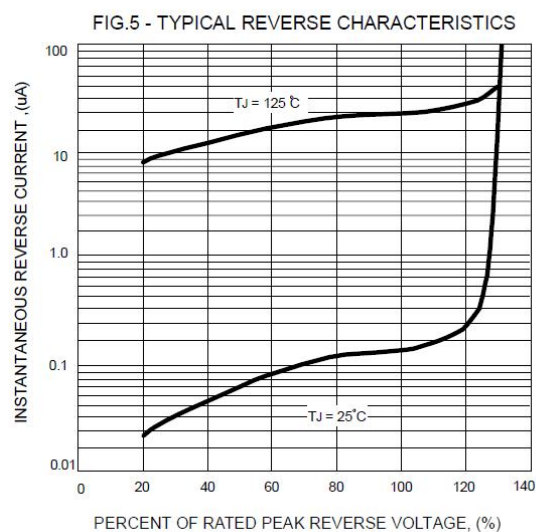
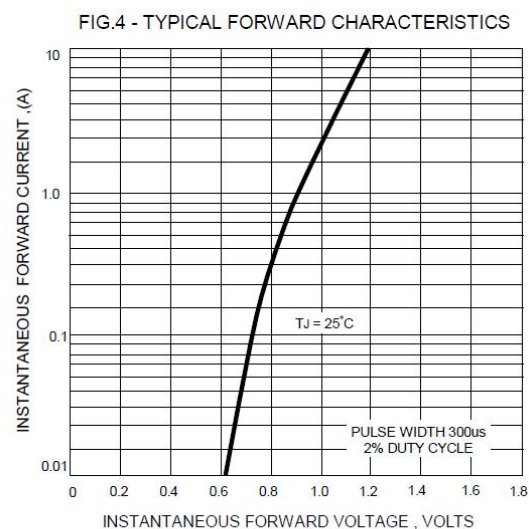
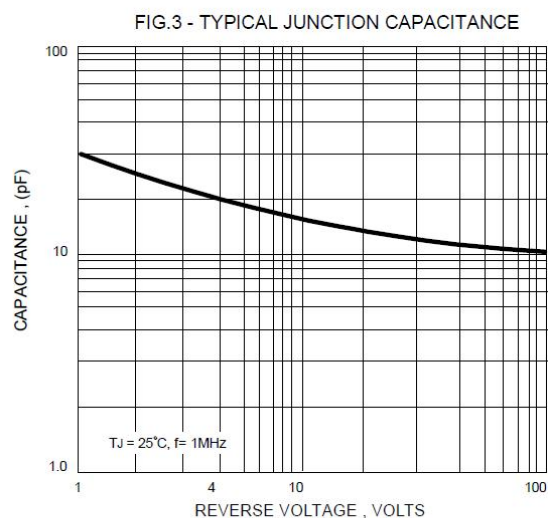
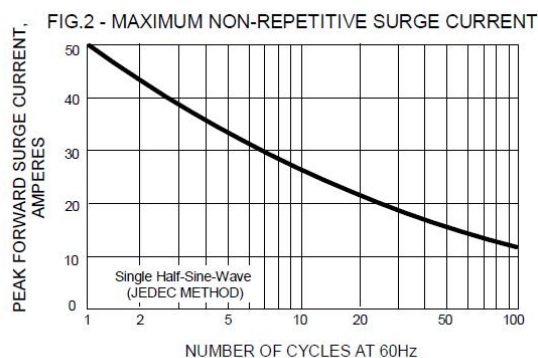
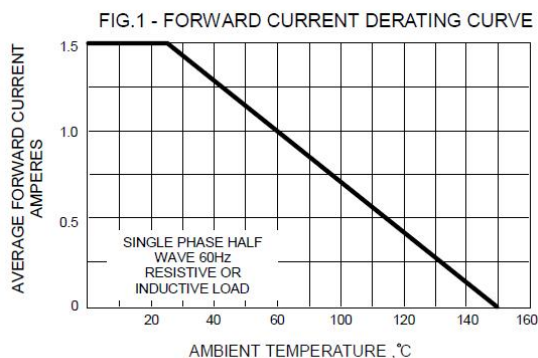
PARAMETER	SYMBOL	W005	W01	W02	W04	W06	W08	W10	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @TA=25°C	$I_{(AV)}$	1.5							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Maximum forward Voltage at 1.0A DC	V_F	1.0							V
Maximum DC Reverse Current @T _J =25°C at Rated DC Blocking Voltage @ T _J =125°C	I_R	50 500							uA
I ² t Rating for fusing (t < 8.3ms)	I ² t	10.4							A ² S
Typical Junction Capacitance per element (Note 1)	C _J	20							pF
Typical Thermal Resistance (Note 2)	R _{θJA}	36							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

1- Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.

2- Thermal Resistance Junction to Ambient.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®**W005 THRU W10****RATINGS AND CHARACTERISTIC CURVES**

Note: Specifications are subject to change without notice.

Kingtronics® International Company