




SHANGSI

SS32F thru SS320F

表面安装肖特基二极管
反向电压 20 --- 200 V
正向电流 3.0A

Surface Mount Schottky Barrier Rectifiers
Reverse Voltage 20 to 200 V
Forward Current 3.0 A

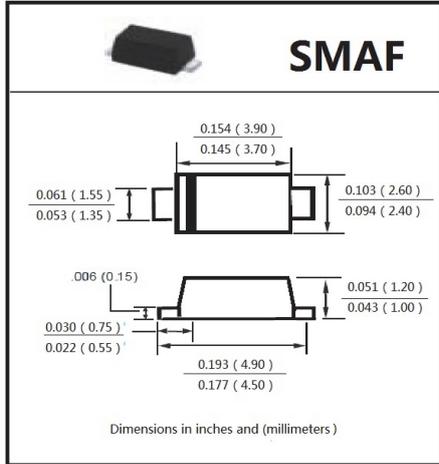

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证: 260°C/10秒 High temperature soldering guaranteed: 260°C/10seconds at terminals
- 引线 and 管体皆符合 RoHS 标准。Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS32F	SS33F	SS34F	SS36F	SS310F	SS315F	SS320F	Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	60	100	150	200	V
最大反向有效值电压 Maximum RMS voltage	V_{RMS}	14	21	28	42	70	105	140	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	20	30	40	60	100	150	200	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	3.0							A
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	80							A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	55							$^\circ\text{C/W}$
工作结温 Operating junction range	T_J	-50---+125			-50---+150				$^\circ\text{C}$
存储温度 storage temperature range	T_{STG}	-50---+150							$^\circ\text{C}$

电特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS32F	SS33F	SS34F	SS36F	SS310F	SS315F	SS320F	Unit
最大正向电压 $I_F = 3.0A$ Maximum forward voltage	V_F	0.5			0.70	0.80		0.90	V
最大反向漏电流 $T_A = 25^\circ\text{C}$ Maximum reverse current $T_A = 100^\circ\text{C}$	I_R	0.5				0.2		mA	
		20.0			10.0	5.0			
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	C_J	500			300			pF	




SS32F thru SS320F

SHANGSI

特性曲线 RATING AND CHARACTERISTIC CURVES

AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

FIG. 1- FORWARD CURRENT DERATING CURVE

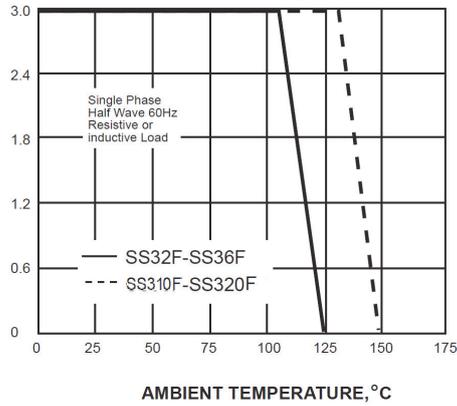

PEAK FORWARD SURGE CURRENT, AMPERES

FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

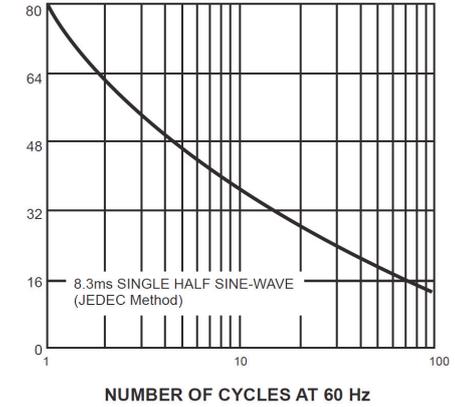


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

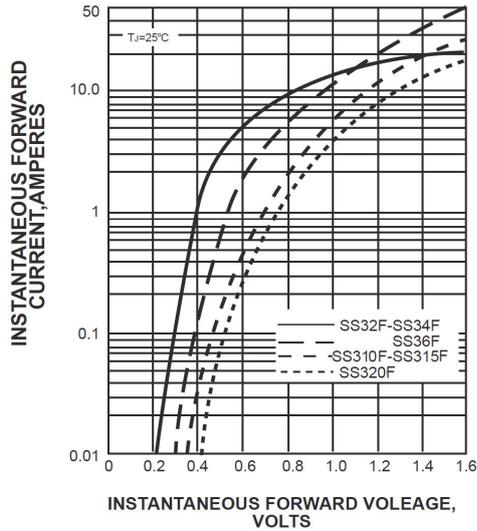


FIG. 4-TYPICAL REVERSE CHARACTERISTICS



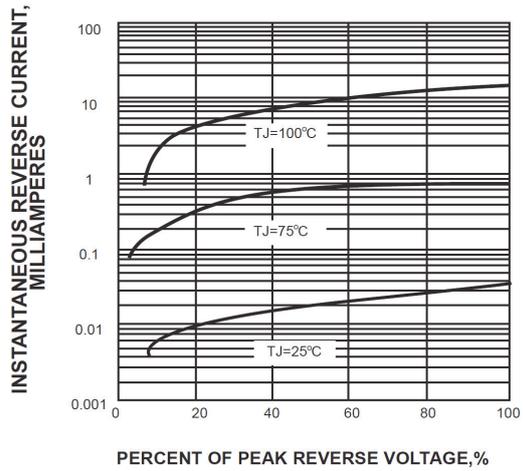


FIG. 5-TYPICAL JUNCTION CAPACITANCE

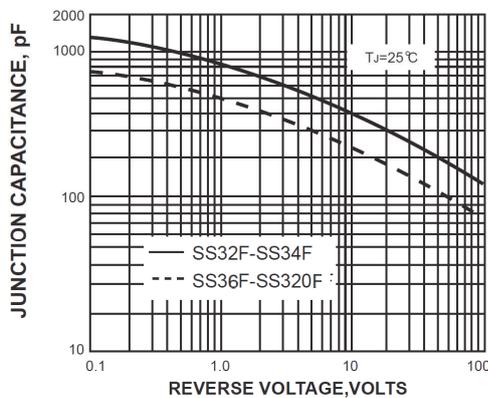

TRANSIENT THERMAL IMPEDANCE, °C/W

FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

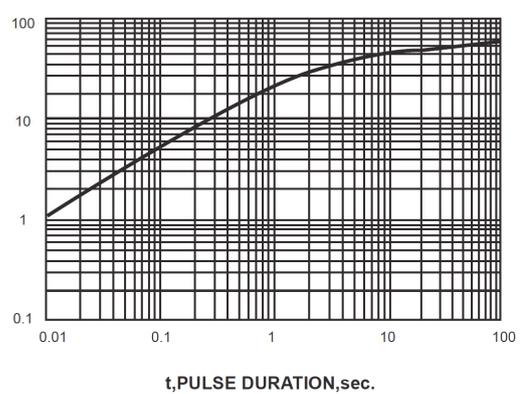




SHANGSI

SS32F-SS320F

Mounting Pad Layout

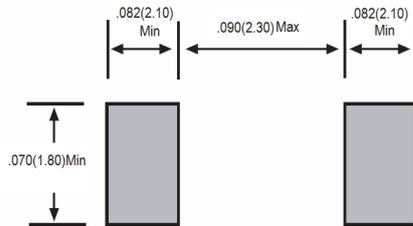

Packing

Part number	Component Package	Quantity	Packaging Option
SS32F-SS320F	DO-219AB SMAF	10000	Tape & Reel – 12mm/13" tape

Tape and Reel Specification

