




SHANGSI

SS12F thru SS110F

表面安装肖特基二极管
反向电压 20 --- 100 V
正向电流 1.0A

Surface Mount Schottky Barrier Rectifiers
Reverse Voltage 20 to 100 V
Forward Current 1.0 A

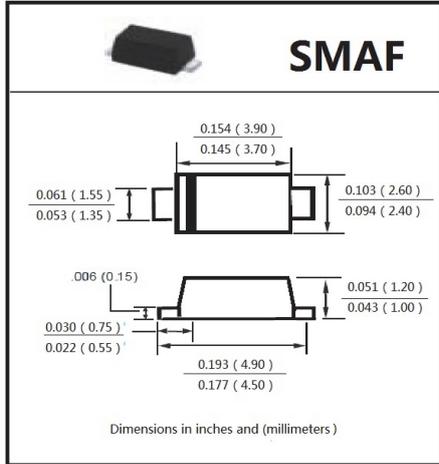

特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证: 260°C/10秒 High temperature soldering guaranteed: 260°C/10seconds at terminals
- 引线 and 管体皆符合 RoHS 标准。Lead and body according with RoHS standard

机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS12F	SS13F	SS14F	SS16F	SS110F	Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	60	100	V
最大反向有效值电压 Maximum RMS voltage	V_{RMS}	14	21	28	42	70	V
最大直流阻断电压 Maximum DC blocking voltage	V_{DC}	20	30	40	60	100	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	1.0					A
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	30					A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	125					$^\circ\text{C/W}$
工作结温 Operating junction range	T_J	-65---+125			-65---+150		$^\circ\text{C}$
存储温度 storage temperature range	T_{STG}	-65---+150					

电特性 $T_A = 25^\circ\text{C}$ 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	Symbols	SS12F	SS13F	SS14F	SS16F	SS110F	Unit
最大正向电压 $I_F = 1.0A$ Maximum forward voltage	V_F	0.50			0.70	0.80	V
最大反向漏电流 $T_A = 25^\circ\text{C}$ Maximum reverse current $T_A = 100^\circ\text{C}$	I_R	0.4			0.05	0.05	mA
		10.0		5.0	0.50		
典型结电容 $V_R = 4.0V, f = 1MHz$ Type junction capacitance	C_J	50					pF



SHANGSI

SS12F thru SS110F

特性曲线 RATING AND CHARACTERISTIC CURVES

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

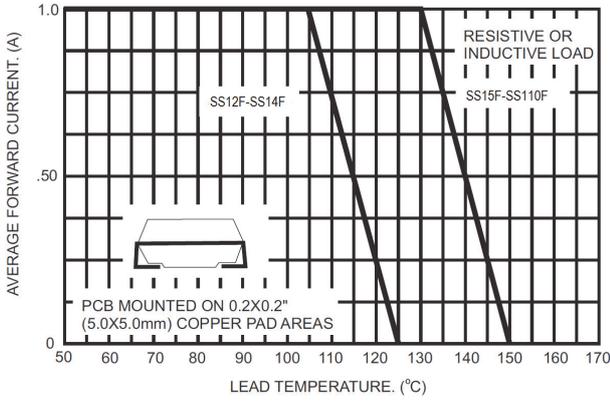


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

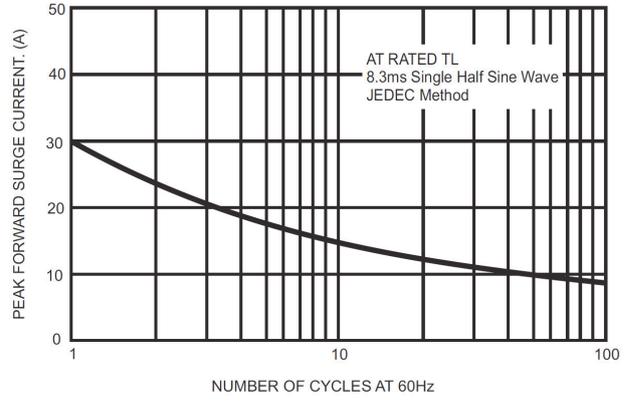


FIG.3- TYPICAL FORWARD CHARACTERISTICS

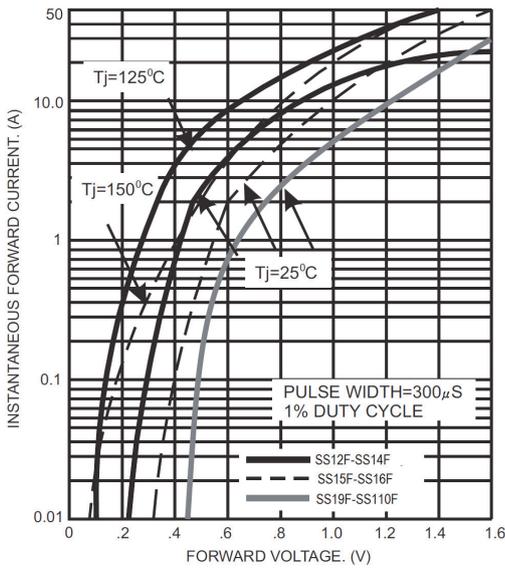


FIG.4- TYPICAL REVERSE CHARACTERISTICS

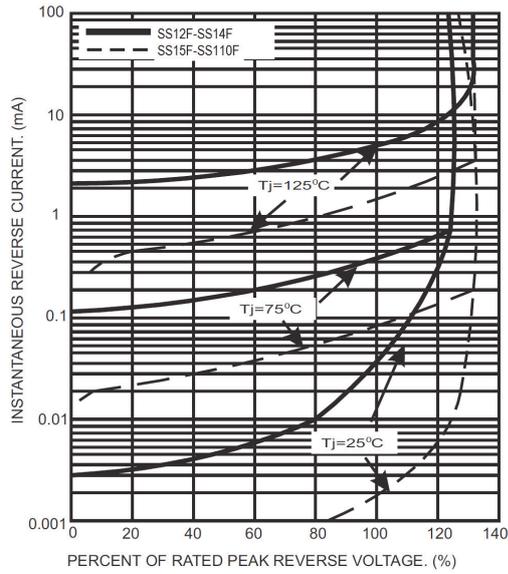


FIG.5- TYPICAL JUNCTION CAPACITANCE



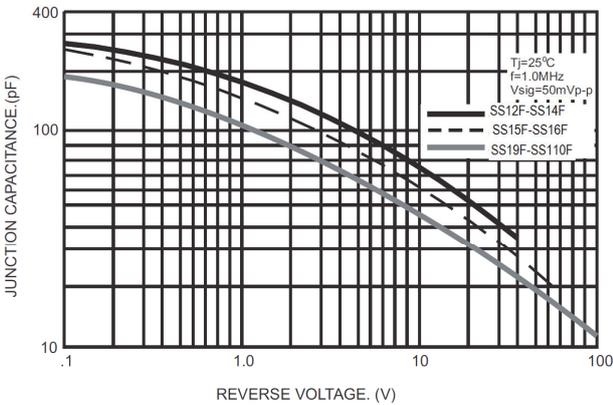


FIG.6- TYPICAL CAPACITANCE

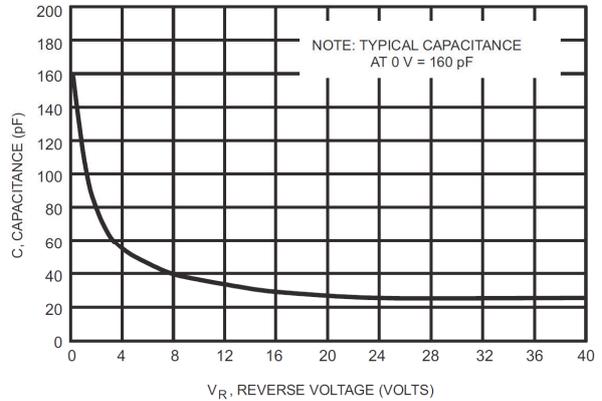

Mounting Pad Layout

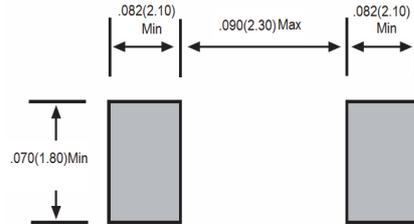

Packing

Part number	Component Package	Quantity	Packaging Option
SS12F-SS120F	DO-219AB SMAF	10000	Tape & Reel – 12mm/13" tape

Tape and Reel Specification

