



Document Title	M190MWW3 R3 Product Information		Page No.	1/30	
Document No.		Issue Date	2009/07/14	Revision	00

IVO Product Information

To:

Product Name: M190MWW3 R3

Document Issue Date: 2009/07/14

Customer
<u>SIGNATURE</u>
 <hr/> <hr/> <hr/> <hr/>
<p>Please return 1 copy for your confirmation with your signature and comments.</p>

InfoVision Optoelectronics
<u>SIGNATURE</u>
 REVIEWED BY QA <hr/> PREPARED BY FAE <hr/>

- Note: 1. Please contact InfoVision Company. before designing your product based on this product.
2. The information contained herein is presented merely to indicate the characteristics and performance of our products. No responsibility is assumed by IVO for any intellectual property claims or other problems that may result from application based on the module described herein.

FQ-7-30-0-009-03D



Document Title	M190MWW3 R3 Product Information		Page No.	3/30	
Document No.		Issue Date	2009/07/14	Revision	00

Contents

1.0	General Descriptions	p.4
2.0	Absolute Maximum Ratings	p.6
3.0	Pixel Format Image	p.7
4.0	Optical Characteristics	p.8
5.0	Backlight Characteristics.....	p.11
6.0	Electrical Characteristics	p.13
7.0	Interface Timings.....	p.20
8.0	Power Consumption	p.22
9.0	Power ON/OFF Sequence	p.23
10.0	Mechanical Characteristic.....	p.24
11.0	Package Specification	p.27
12.0	Lot Mark.....	p.28
13.0	General Precaution	p.29

1.0 General Descriptions



Document Title	M190MWW3 R3 Product Information		Page No.	4/30	
Document No.		Issue Date	2009/07/14	Revision	00

1.1 Introduction

The M190MWW3 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. It is composed of a TFT LCD panel, a timing controller, voltage reference, common voltage, driver DC-DC converter, column driver, and row driver circuit. This TFT LCD has a 19-inch diagonally measured active display area with WXGA+ resolution (1440 vertical by 900 horizontal pixel array).

1.2 Features

- 19" WXGA+ TFT LCD Panel
- 2CCFLs Backlight System
- Supported WXGA+ (V:1440 lines, H:900 pixels) resolution
- Supported to 75Hz Refresh Rate
- Compatible with RoHS Standard

1.3 Product Summary


Items	Specifications	Unit
Screen Diagonal	18.95 inch	inch
Active Area	408.24 (H) x 255.15 (V)	mm
Pixels H x V	1,440 (x3) x 900	
Pixel Pitch	0.2835 (per one triad) x 0.2835	mm
Pixel Arrangement	R.G.B. Vertical Stripe	
Display Mode	Normally White	
White Luminance	250 typical	cd/m ² (CCFL@7.5mA)
Contrast Ratio	1000 : 1 typical	
Response Time	5 typical	msec
Input Voltage	+ 5.0 typical	v
Logic Power Consumption	3.0 typical (Black pattern, 60Hz)	watt
Backlight Power Consumption	10.05 typical (CCFL current 7.5mA)	watt
Weight	2,250 max	g
Outline Dimension	428 (W) x 278 (H) x 15.5 (T) typical	mm
Electrical Interface (Logic)	6bit+Hi-FRC dual LVDS	
Support Color	16.7M	
Lamp Life Time	50,000 (Ta=25+/-3degC and ICCFL=7.5mA, brightness becomes lower than 50% of initial value)	hours
Luminance Uniformity	80% typical (@9 points)	
Optimum Viewing Direction	6 o'clock	
Surface Treatment	Anti Glare + HC	

1.4 Functional Block Diagram

Document Title	M190MWW3 R3 Product Information		Page No.	5/30	
Document No.		Issue Date	2009/07/14	Revision	00

Figure 1 shows the functional block diagram of the LCD module.

Figure 1 Block Diagram

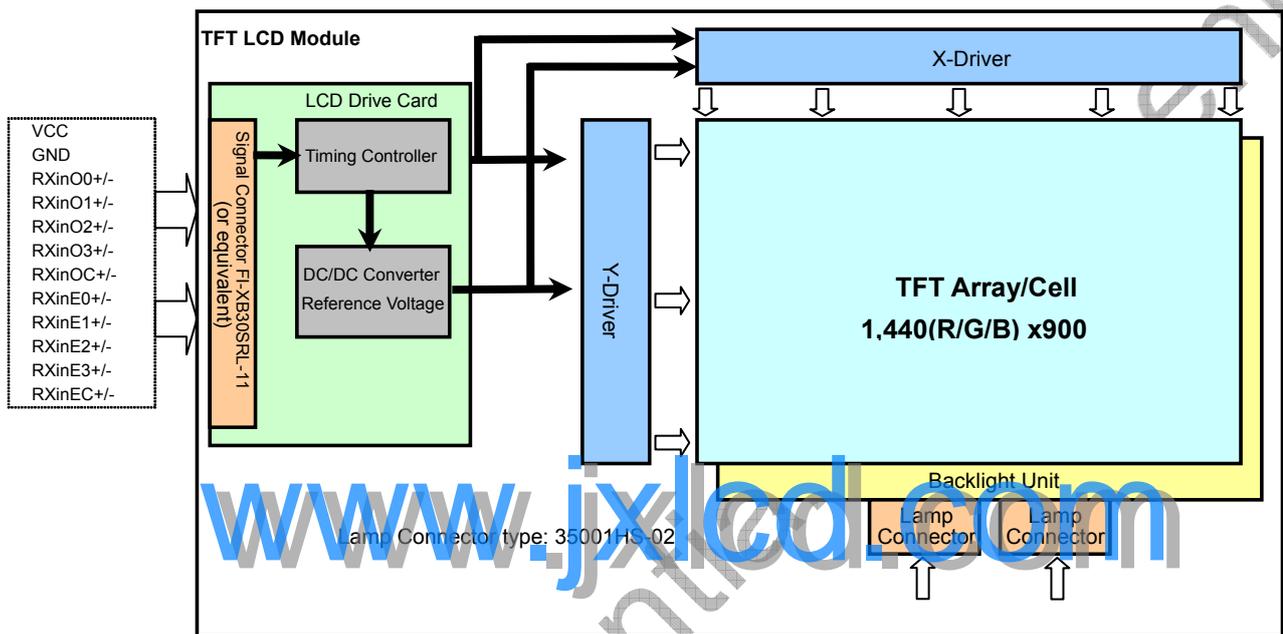




Document Title	M190MWW3 R3 Product Information			Page No.	6/30
Document No.		Issue Date	2009/07/14	Revision	00

2.0 Absolute Maximum Ratings

Table 1

Item	Symbol	Min	Max	Unit	Conditions
Supply Voltage	VDD	-0.3	+6.0	V	
Input Signal		-0.3	+2.7	V	LVDS signals
Operating Temperature	TOP	0	+50	Deg. C	(Note)
Operating Humidity	HOP	10	80	%RH	(Note)
Storage Temperature	TST	-20	+60	Deg. C	(Note)
Storage Humidity	HST	10	90	%RH	(Note)
Vibration			1.5 10-200-10	G Hz	30min for X, Y, Z axis
Shock			70 1	G Ms	Half sign wave

Note (1) Storage /Operating temperature. Maximum Wet-Bulb should be 39 degree C. No condensation.

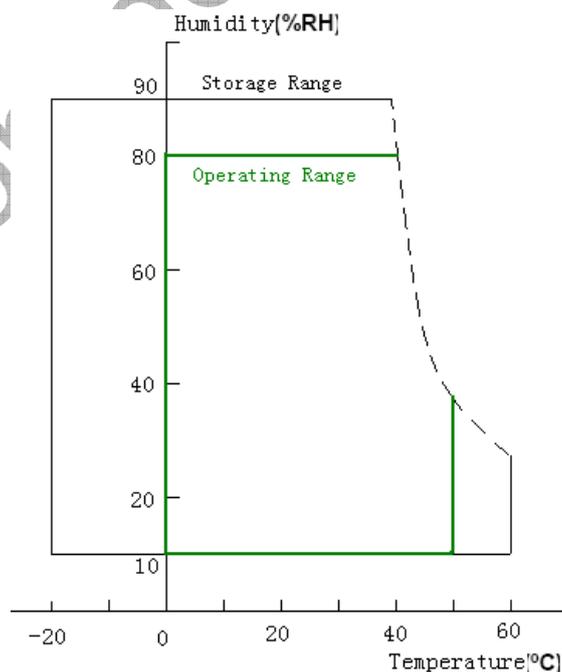


Document Title	M190MWW3 R3 Product Information		Page No.	7/30	
Document No.		Issue Date	2009/07/14	Revision	00

3.0 Pixel Format Image

Figure 2 shows the relationship of the input signals and LCD pixel format image.

Figure 2 Pixel Format

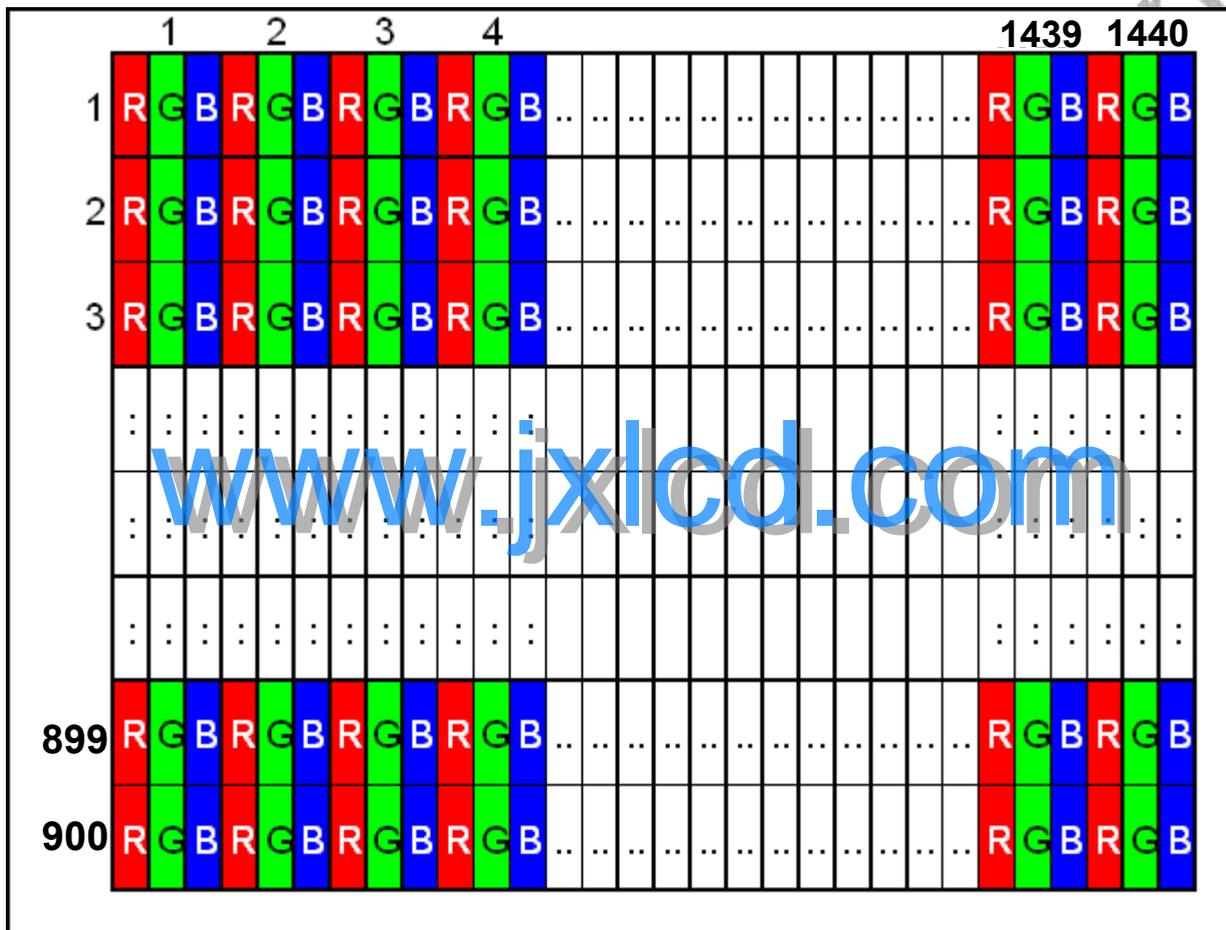

Document Title	M190MWW3 R3 Product Information		Page No.	8/30	
Document No.		Issue Date	2009/07/14	Revision	00

4.0 Optical Characteristics

The optical characteristics are measured under stable conditions as following notes

Table 2 Optical Characteristics


Item	Conditions	Specification			
		Min	Typ	Max	Note
Viewing Angle [degrees] K=Contrast Ratio>10	Horizontal (Right + Left)	140	160	--	A, B
	Vertical (Up + Down)	140	160	--	
Contrast ratio		750	1000	--	A, C
Response Time [ms]	Rising + Falling	--	5	10	A, D
Color Chromaticity (CIE1931)	Red x	-0.03	0.643	+0.03	A,
	Red y		0.336		A,
	Green x		0.284		A,
	Green y		0.599		A,
	Blue x		0.145		A,
	Blue y		0.068		A,
	White x		0.313		A,
	White y		0.329		A,
White Luminance [cd/m ²]	ICCFL=7.5mA	200	250	--	Center A, E
Luminance Uniformity [%]	ICCFL=7.5mA, 9points	75	80	--	A, F

Note:


A. Measurement Setup:

The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 20 minutes in a windless room.

Figure 3 Measurement Setup

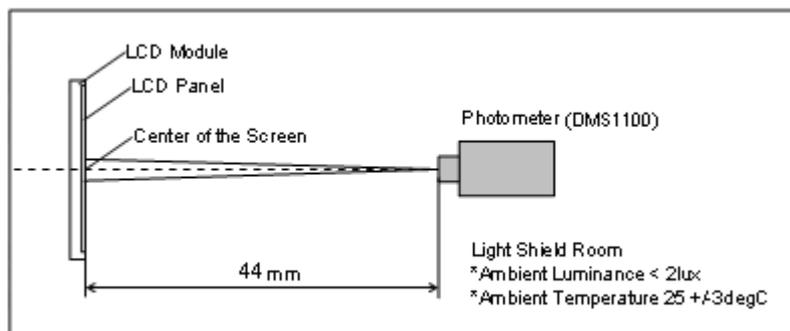


Document Title	M190MWW3 R3 Product Information		Page No.	9/30	
Document No.		Issue Date	2009/07/14	Revision	00

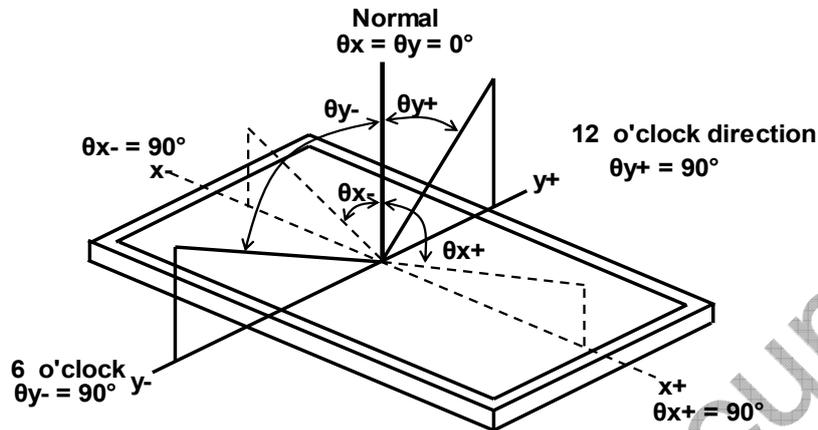B. Definition of Viewing Angle
Figure 4 Definition of Viewing Angle

C. Definition of Contrast Ratio (CR)

The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

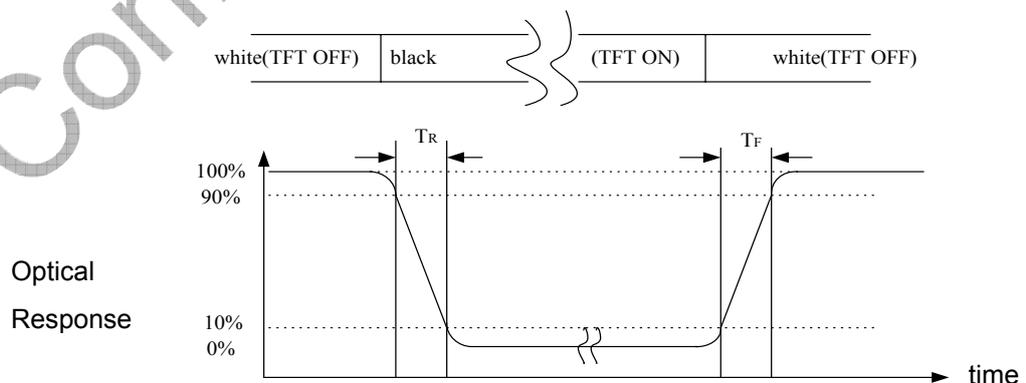L_{255} : Luminance of gray level 255 L_0 : Luminance of gray level 0

D. Definition of Response Time (T_R , T_F)
Figure 5 Definition of Response Time


Document Title	M190MWW3 R3 Product Information		Page No.	10/30	
Document No.		Issue Date	2009/07/14	Revision	00

E. Definition of Luminance White


Measure the luminance of gray level 255 at center point

F. Definition of Luminance Uniformity(Variation)

Measure the luminance of gray level 255 at 9 points.

$$UNF(9pts) = \frac{\min(L1, L2, \dots L9)}{\max(L1, L2, \dots L9)}$$

Figure 6 Measurement Locations of 9 Points

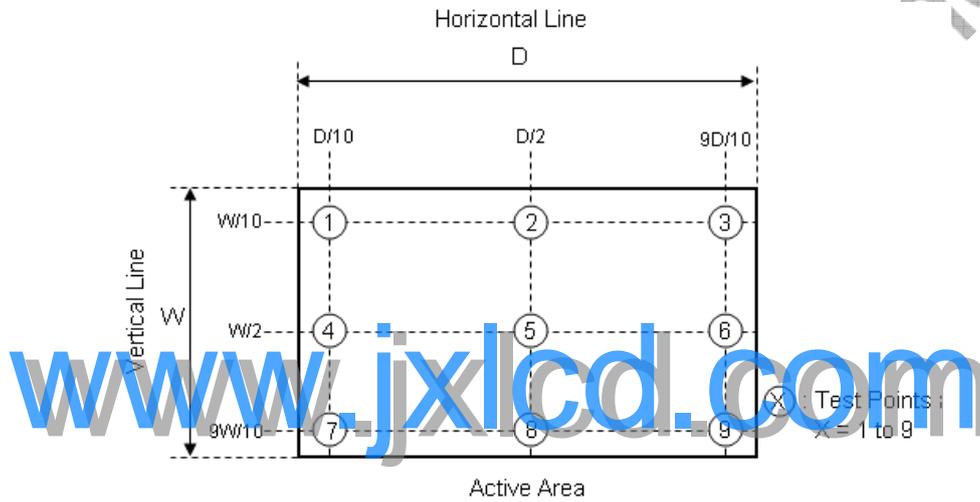

IVO Conflic



Document Title	M190MWW3 R3 Product Information			Page No.	11/30
Document No.		Issue Date	2009/07/14	Revision	00

5.0 Backlight Characteristics

5.1 CCFL Connector

Table 3 Connector Name / Designation

Manufacturer	Yeonho
Type / Part Number	35001HS-02 or equivalent

Table 4 Signal Assignment

Pin #	Signal Name
1	Lamp High Voltage
2	Lamp Low Voltage

5.2 Parameter Guideline for CCFL Inverter

Table 5 Parameter Guideline for CCFL Inverter

Symbol	Parameter	Min	Design Point	Max	Units	Condition
ICCFL	CCFL current	3	7.5	8	[mA _{rms}]	Ta=25[deg C] (Note A)
FCCFL	CCFL Frequency	40	46	60	[kHz]	Ta=25[deg C] (Note B)
VCCFLi	Inverter Ignition Voltage	1,700	--	--	[V _{rms}]	Ta=0[deg C] (Note C)
		1,400	--	--		Ta=25[deg C] (Note C)
VCCFL	CCFL Voltage	648	670	792	[V _{rms}]	@ ICCFL=6.5mA Ta=25[deg C]


Note:

- If it exceeds MIN/MAX values, then "CCFL Life", "ON/OFF Cycle", and "SAFETY" will not be guaranteed.
- CCFL Frequency should be carefully determined to avoid interference between inverter and TFT LCD.
- The voltage over specified value (VCCFLi) should be applied to the lamp more than 1 second after startup. Otherwise, the lamp may not be turned on. The used lamp current is the lamp typical current. The inverter should be able to give out a power that has a generating capacity of over 1560 voltage. Lamp units need to over 1560 voltage for ignition.

Document Title	M190MWW3 R3 Product Information		Page No.	12/30	
Document No.		Issue Date	2009/07/14	Revision	00

D. The distortion rate of the waveform should be within $\sqrt{2} \pm 10\%$

The inverter output waveform should be better similar to the ideal sine wave.

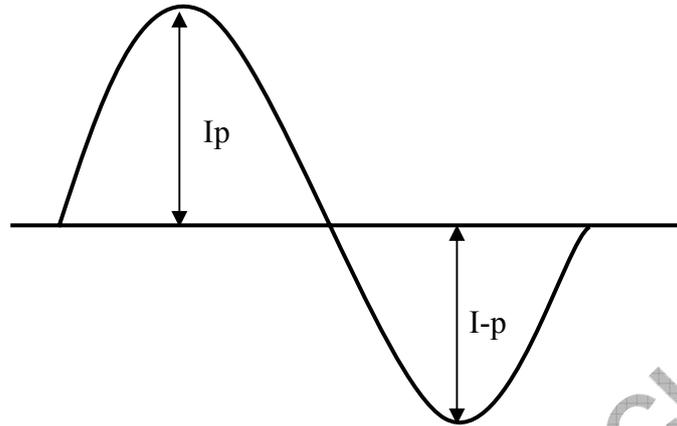

$$\text{Asymmetry rate} = |I_p - I_{-p}| / I_{rms} \times 100\%$$

$$\text{Distortion rate} = I_p \text{ (or } I_{-p}) / I_{rms}$$

Figure 7 Recommendation of Lighting Waveform

www.jxlcd.com



Document Title	M190MWW3 R3 Product Information		Page No.	13/30	
Document No.		Issue Date	2009/07/14	Revision	00

6.0 Electrical Characteristics

6.1 Interface Connector

Table 6 Connector Name / Designation

Manufacturer	Jae (or Equivalent)
Type / Part Number	UJU IS100-L30R-C23 · FCI 10061851-001
Mating Receptacle/Part Number	JAE FI-X30H(L), JAE FI-X30C*(L), JAE FI-X30M*

Table 7 Signal Pin Assignment

Pin #	Signal Name	Description	Remarks
1	RXinO0-	LVDS differential data input	
2	RXinO0+	LVDS differential data input	
3	RXinO1-	LVDS differential data input	
4	RXinO1+	LVDS differential data input	
5	RXinO2-	LVDS differential data input	
6	RXinO2+	LVDS differential data input	
7	GND	Ground	
8	RXOC-	LVDS differential data input	
9	RXOC+	LVDS differential data input	
10	RXinO3-	LVDS differential data input	
11	RXinO3+	LVDS differential data input	
12	RXinE0-	LVDS differential data input	
13	RXinE0+	LVDS differential data input	
14	GND	Ground	
15	RXinE1-	LVDS differential data input	
16	RXinE1+	LVDS differential data input	
17	GND	Ground	
18	RXinE2-	LVDS differential data input	
19	RXinE2+	LVDS differential data input	
20	RXEC-	LVDS differential data input	
21	RXEC+	LVDS differential data input	
22	RXinE3-	LVDS differential data input	
23	RXinE3+	LVDS differential data input	
24	GND	Ground	
25	GND	Ground	
26	NC	Reserved for LCD manufacturer.	



InfoVision Optoelectronics (Kunshan)Co., Ltd.

Document Title	M190MWW3 R3 Product Information			Page No.	14/30
Document No.		Issue Date	2009/07/14	Revision	00

27	GND	Ground	
28	VDD	Power Supply	
29	VDD	Power Supply	
30	VDD	Power Supply	

All input signals shall be low or Hi-Z state when VDD is off.

www.jxlcd.com

IVO Confidential document



Document Title	M190MWW3 R3 Product Information			Page No.	15/30
Document No.		Issue Date	2009/07/14	Revision	00

6.2 LVDS Receiver

6.2.1 Signal Electrical Characteristics for LVDS Receiver

The built-in LVDS receiver is compatible with ANSI/TIA/TIA-644 standard.

Table8 LVDS Receiver Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Differential Input High Threshold	Vth	--	--	+100	mV	Vcm=+1.2V
Differential Input Low Threshold	Vtl	-100	--	--	mV	Vcm=+1.2V
Magnitude Differential Input Voltage	Vid	100	--	600	mV	
Common Mode Voltage	Vcm	1.0	1.2	1.4	V	Vth - Vtl = 200mV
Common Mode Voltage Offset	ΔVcm	-50	--	+50	mV	Vth - Vtl = 200mV

Note:

A. Input signals shall be low or Hi-Z state when VDD is off.

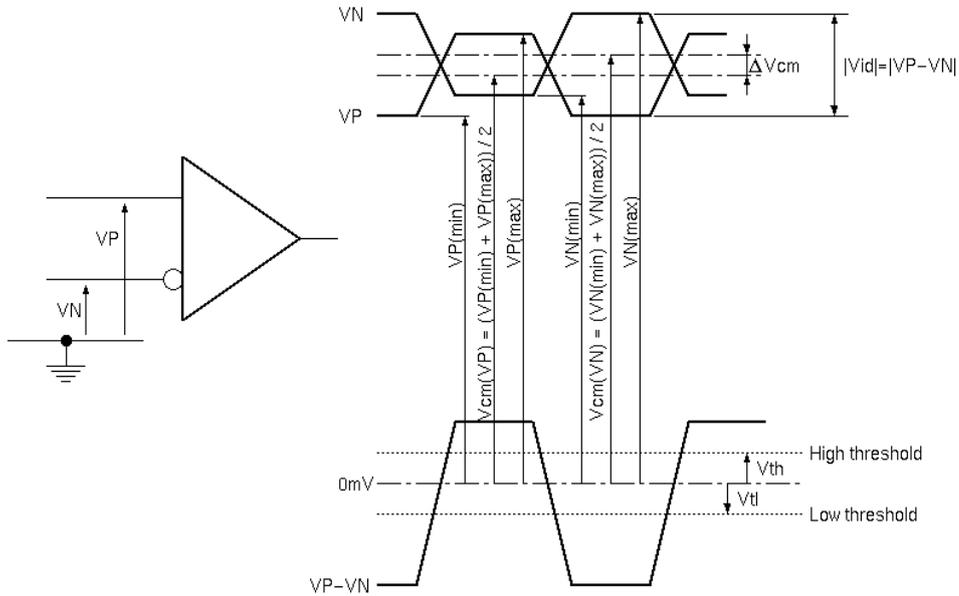
B. All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

Table 9 Timing Requirements


Parameter	Symbol	Min	Typ	Max	Unit	Conditions	Note
Clock Frequency	Fc	41.5	44.5	65.7	MHz	--	--
Input Data Skew Margin	Trskm	-850		+850	ps	Fc=44.5MHz, Vth-Vtl = 400mV Vcm = 1.2V, ΔVcm = 0	(Figure 11)

Note: All values are at VDD=5.0V, Ta=25 degree C.

Document Title	M190MWW3 R3 Product Information	Page No.	16/30
Document No.		Issue Date	2009/07/14
		Revision	00

Figure 8 Voltage Definitions


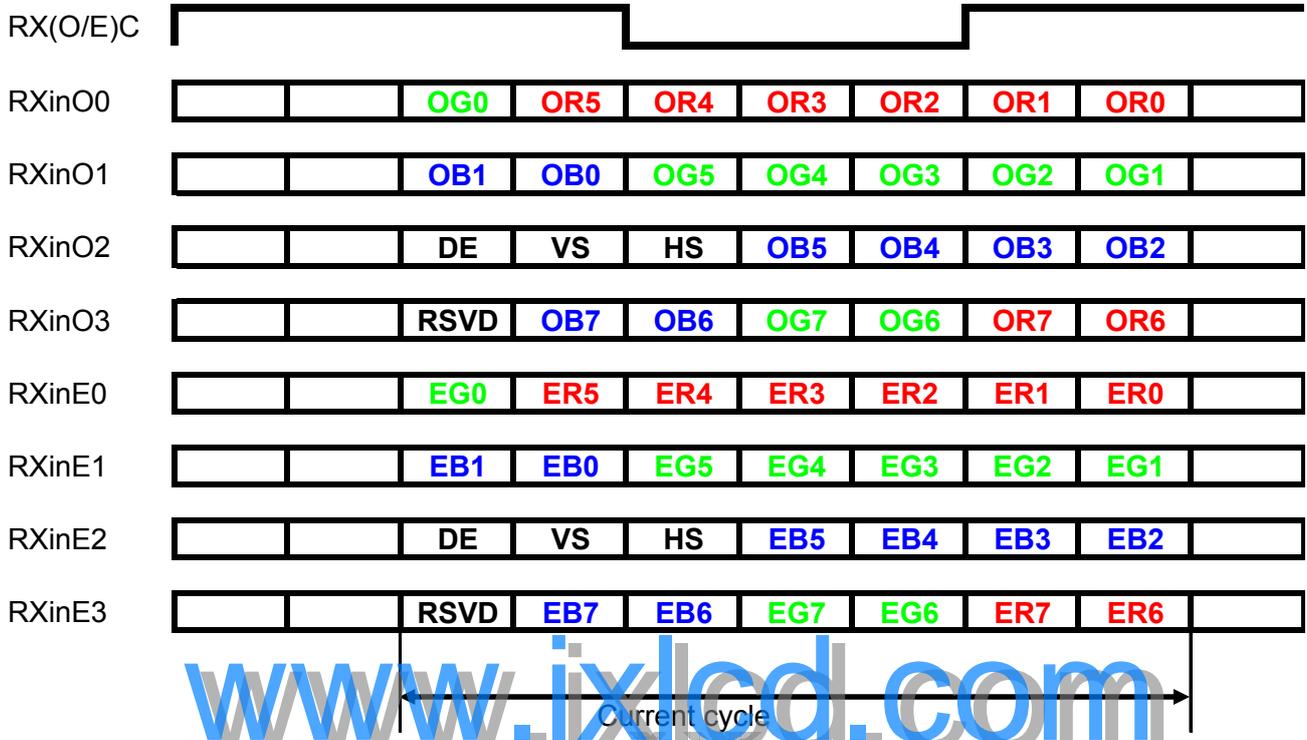
www.jxlcd.com

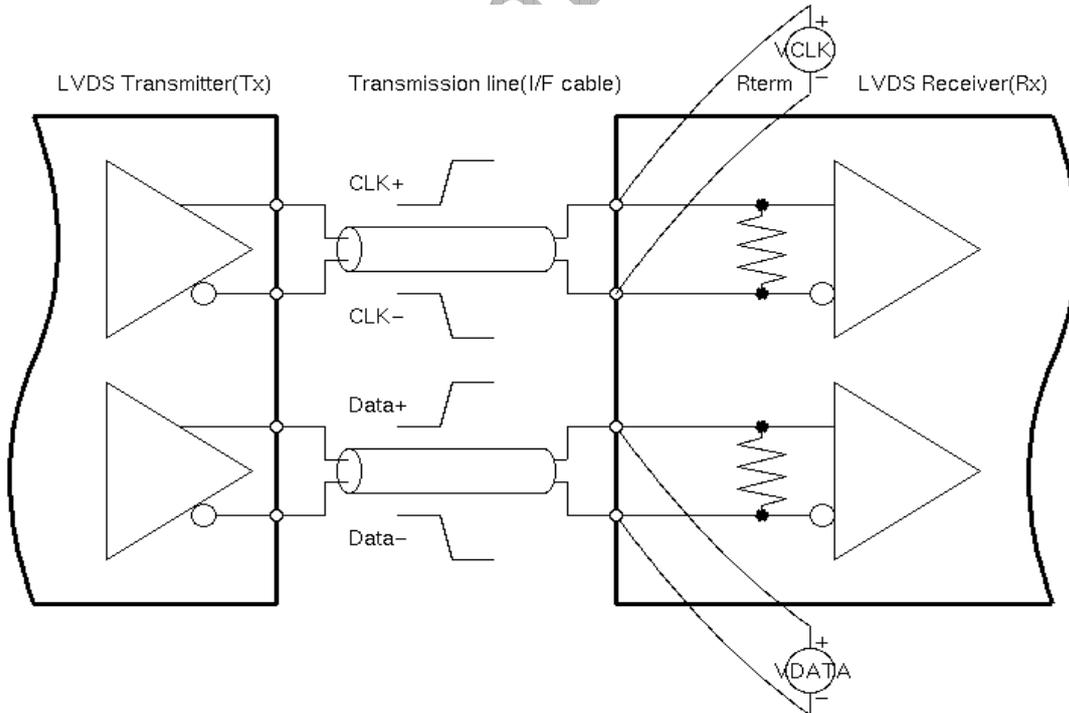Figure 9 Measurement System




Document Title	M190MWW3 R3 Product Information			Page No.	17/30
Document No.		Issue Date	2009/07/14	Revision	00

Figure 10 Data Mapping



www.jxlcd.com


IVO Confidential

Document Title	M190MWW3 R3 Product Information		Page No.	19/30	
Document No.		Issue Date	2009/07/14	Revision	00

6.2.2 LVDS Receiver Internal Circuit

Figure 12 LVDS Receiver Internal Circuit shows the internal block diagram of the LVDS receiver. This LCD module equips termination resistors for LVDS link.

Figure 12 LVDS Receiver Internal Circuit

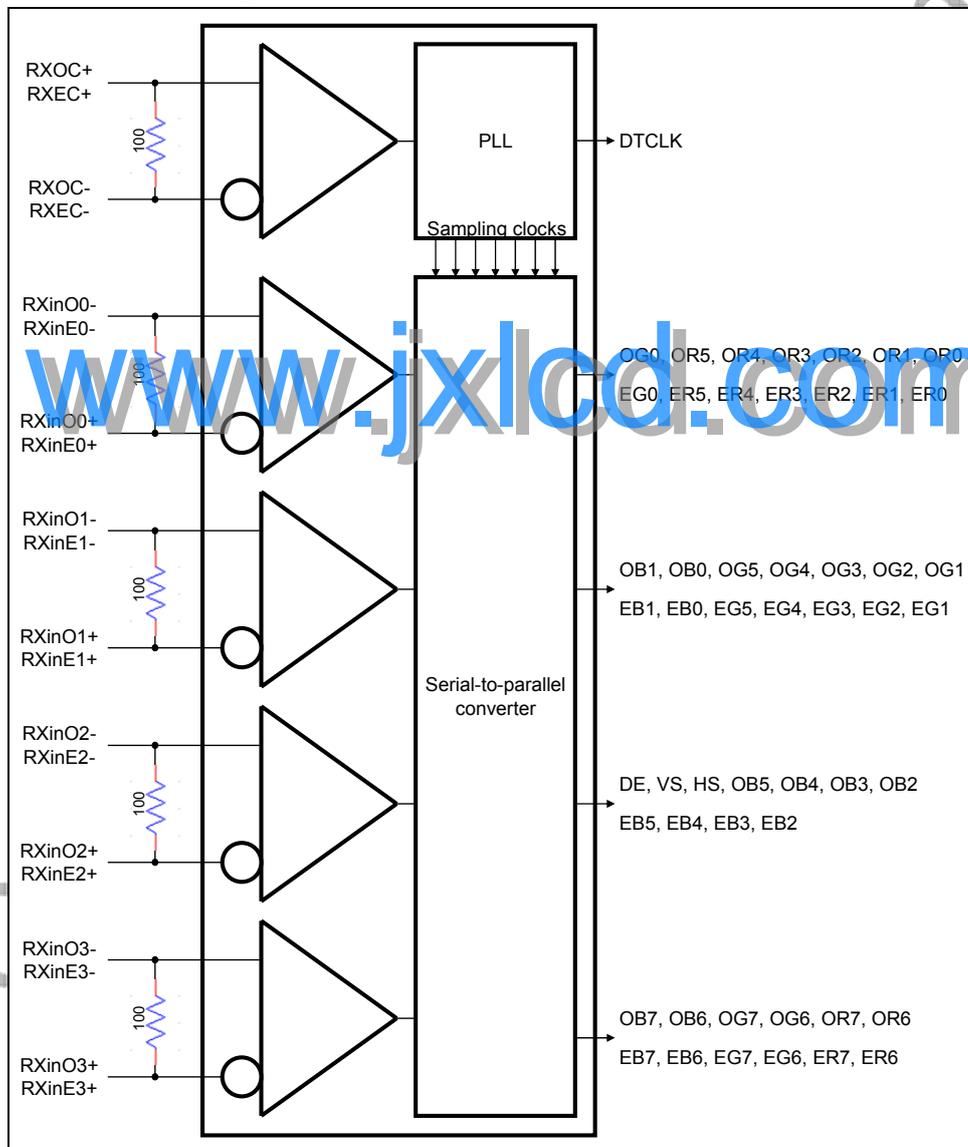



Document Title	M190MWW3 R3 Product Information			Page No.	20/30
Document No.		Issue Date	2009/07/14	Revision	00

7.0 Interface Timings

7.1 Timing Characteristics

Table 10 Interface Timings


Parameter	Symbol	Unit	Min	Typ	Max
LVDS Clock Frequency(dual)	Fdck	MHz	41.5	44.5	65.7
H Total Time	Htotal	clocks	784	800	1023
H Active Time	Hac	clocks	720	720	720
V Total Time	Vtotal	lines	918	926	1400
V Active Time	Vac	lines	900	900	900
Frame Rate	Vsync	Hz	55	60	75

Note (1) This product is DE only mode. The input of Hsync & Vsync signal does not have an effect on normal operation.

(2) Internal Vcc= 5.0V.

www.jxlcd.com

Document Title	M190MWW3 R3 Product Information		Page No.	21/30	
Document No.		Issue Date	2009/07/14	Revision	00

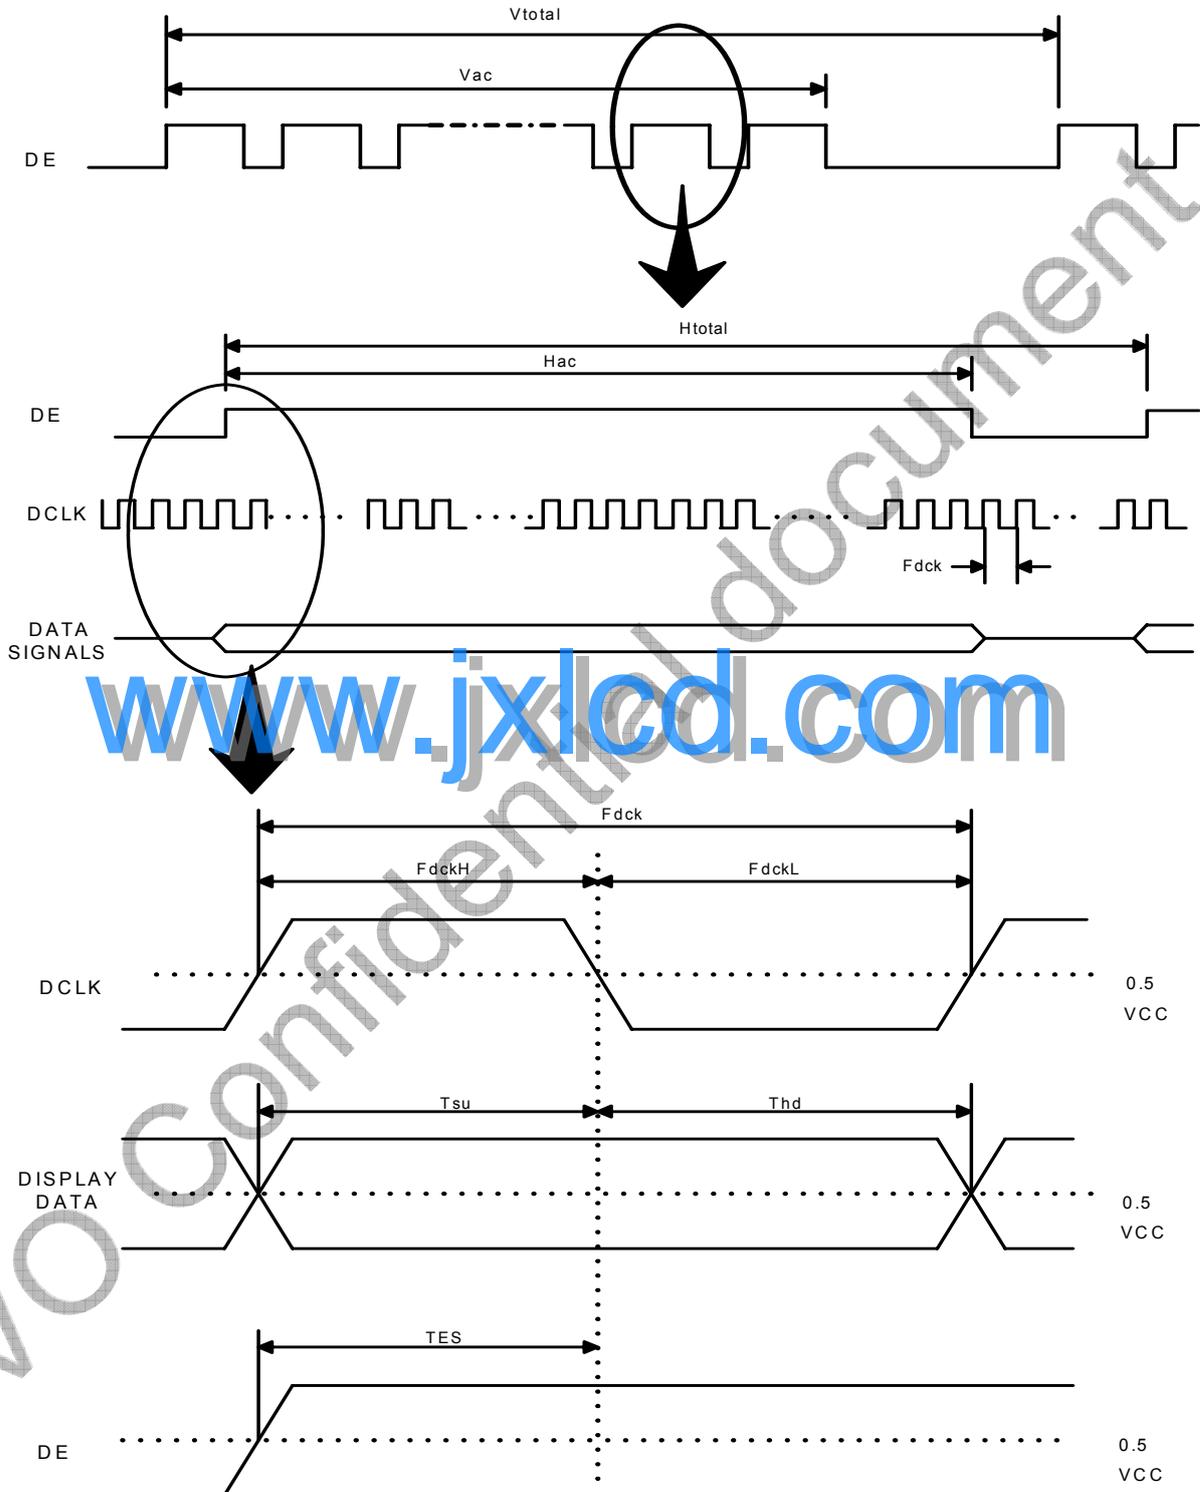Figure 13 Timing Characteristics


Note: TES is data enable signal setup time.



Document Title	M190MWW3 R3 Product Information			Page No.	22/30
Document No.		Issue Date	2009/07/14	Revision	00

8.0 Power Consumption

Input power specifications are as follows.

Table 2 Power Consumption

Symbol	Parameter	Min	Typ	Max	Units	Condition
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[V]	
IDD	VDD Current	--	0.60	--	[A]	All black pattern, 60Hz
		--	--	0.95	[A]	Max pattern, 75Hz
PDD	VDD Power	--	3.0	--	[W]	All black pattern, 60Hz
Irush	Rush Current	--	--	3.0	[A]	Vdd rising time over 0.5ms.Oscilloscope Sampling over 2ms
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	--	--	300	[mVp-p]	


www.jxlcd.com

Document Title	M190MWW3 R3 Product Information		Page No.	23/30	
Document No.		Issue Date	2009/07/14	Revision	00

9.0 Power ON/OFF Sequence

VDD power, interface signals, and lamp on/off sequence are shown in Figure 14. Signals shall be Hi-Z state or low level when VDD is off.

Figure 14 Power Sequence

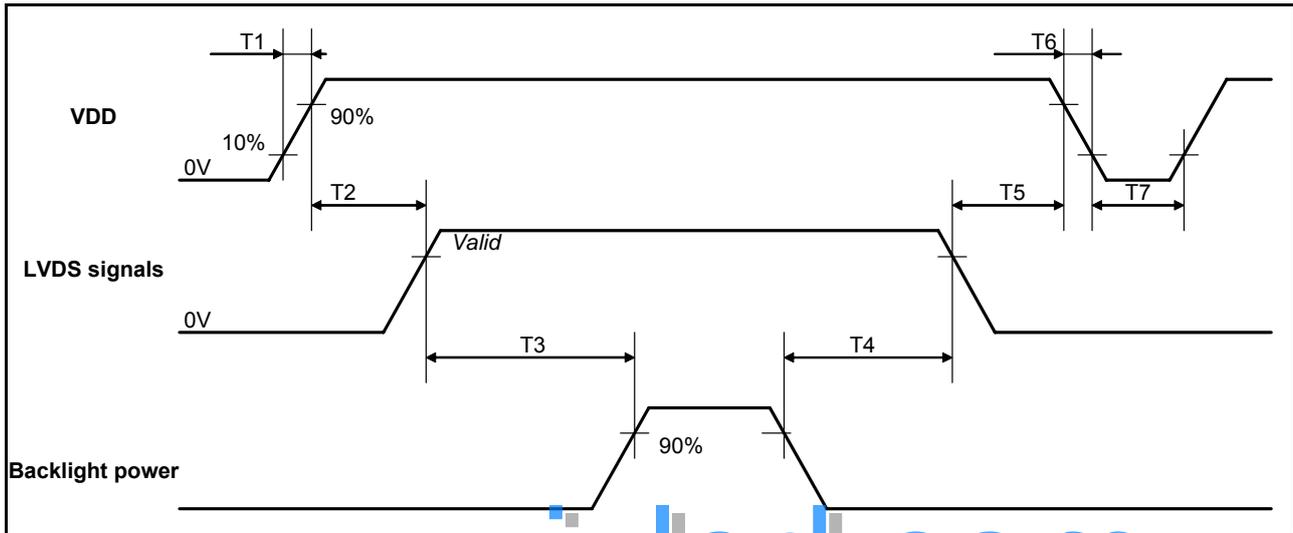

www.jxlcd.com

Table 3 Power Sequencing Requirements

Parameter	Symbol	Unit	Min	Typ	Max	Note
VDD Rise Time	T1	ms	0.5	-	10	
VDD Good to Signal Valid	T2	ms	0	-	50	
Signal Valid to Backlight On	T3	ms	200	-	-	
Backlight Off to Signal Disable	T4	ms	100	-	-	
Signal Disable to Power Down	T5	ms	0	-	50	
VDD Fall Time	T6	ms	-	-	100	1
Power Off	T7	ms	1000	-	-	


Note1: The system designed should decrease the Vdd under 2.2V within 10ms during T6 period.



Document Title	M190MWW3 R3 Product Information	Page No.	24/30
Document No.		Issue Date	2009/07/14
		Revision	00

10.0 Mechanical Characteristics


Figure 15 Reference Outline Drawing (Front Side)

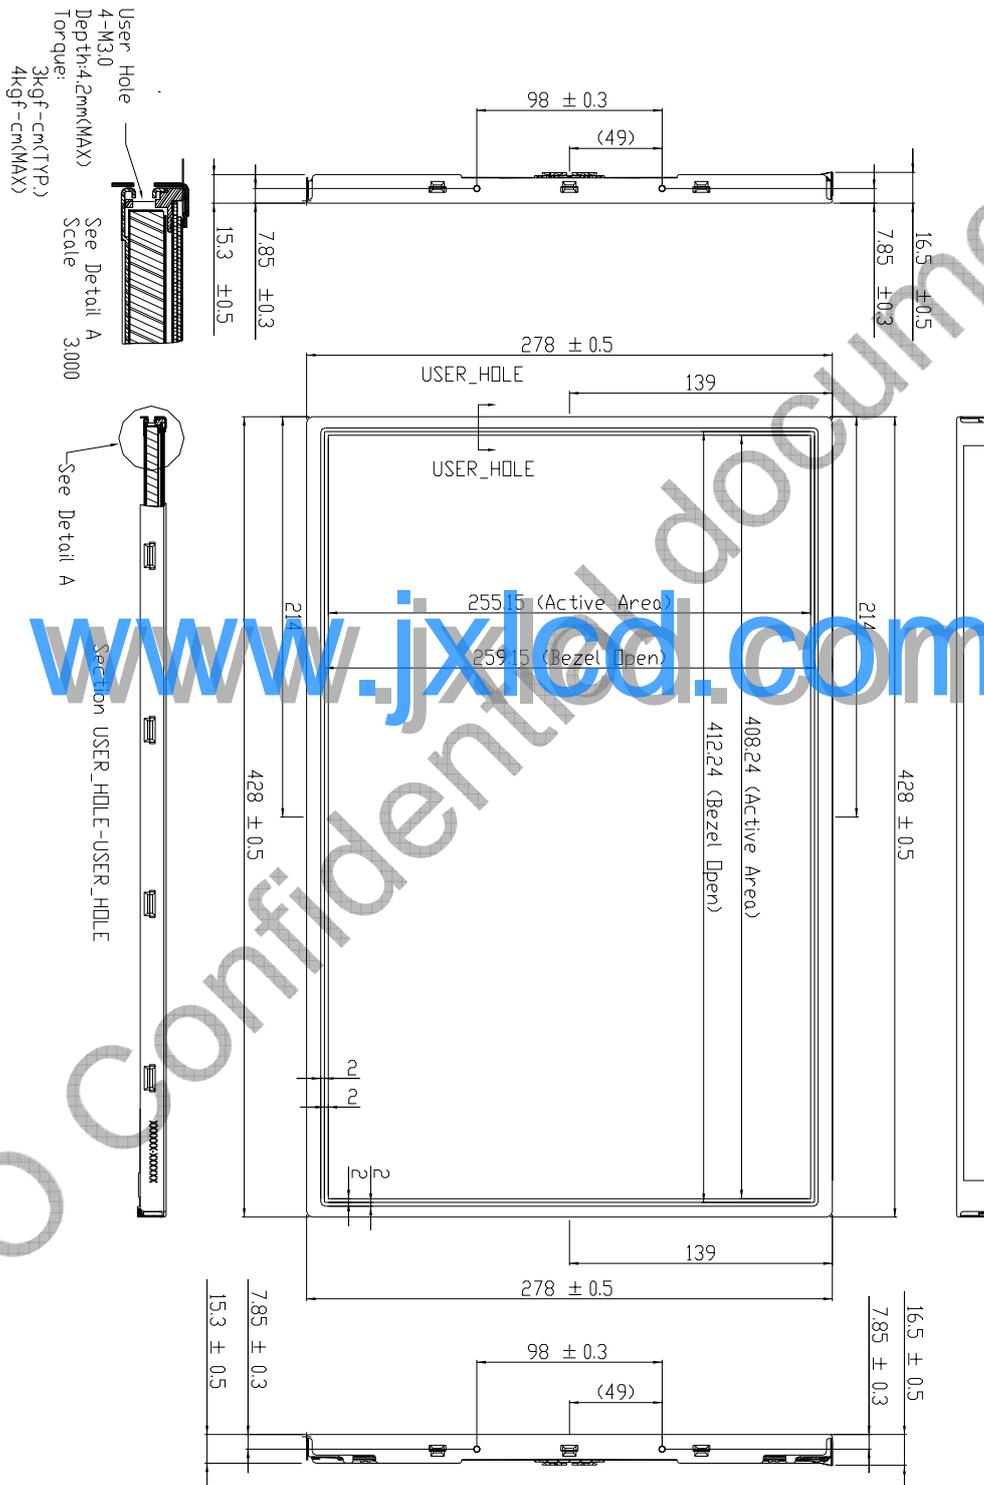



Document Title	M190MWW3 R3 Product Information		Page No.	25/30	
Document No.		Issue Date	2009/07/14	Revision	00

Figure 16 Reference Outline Drawing (Back Side)

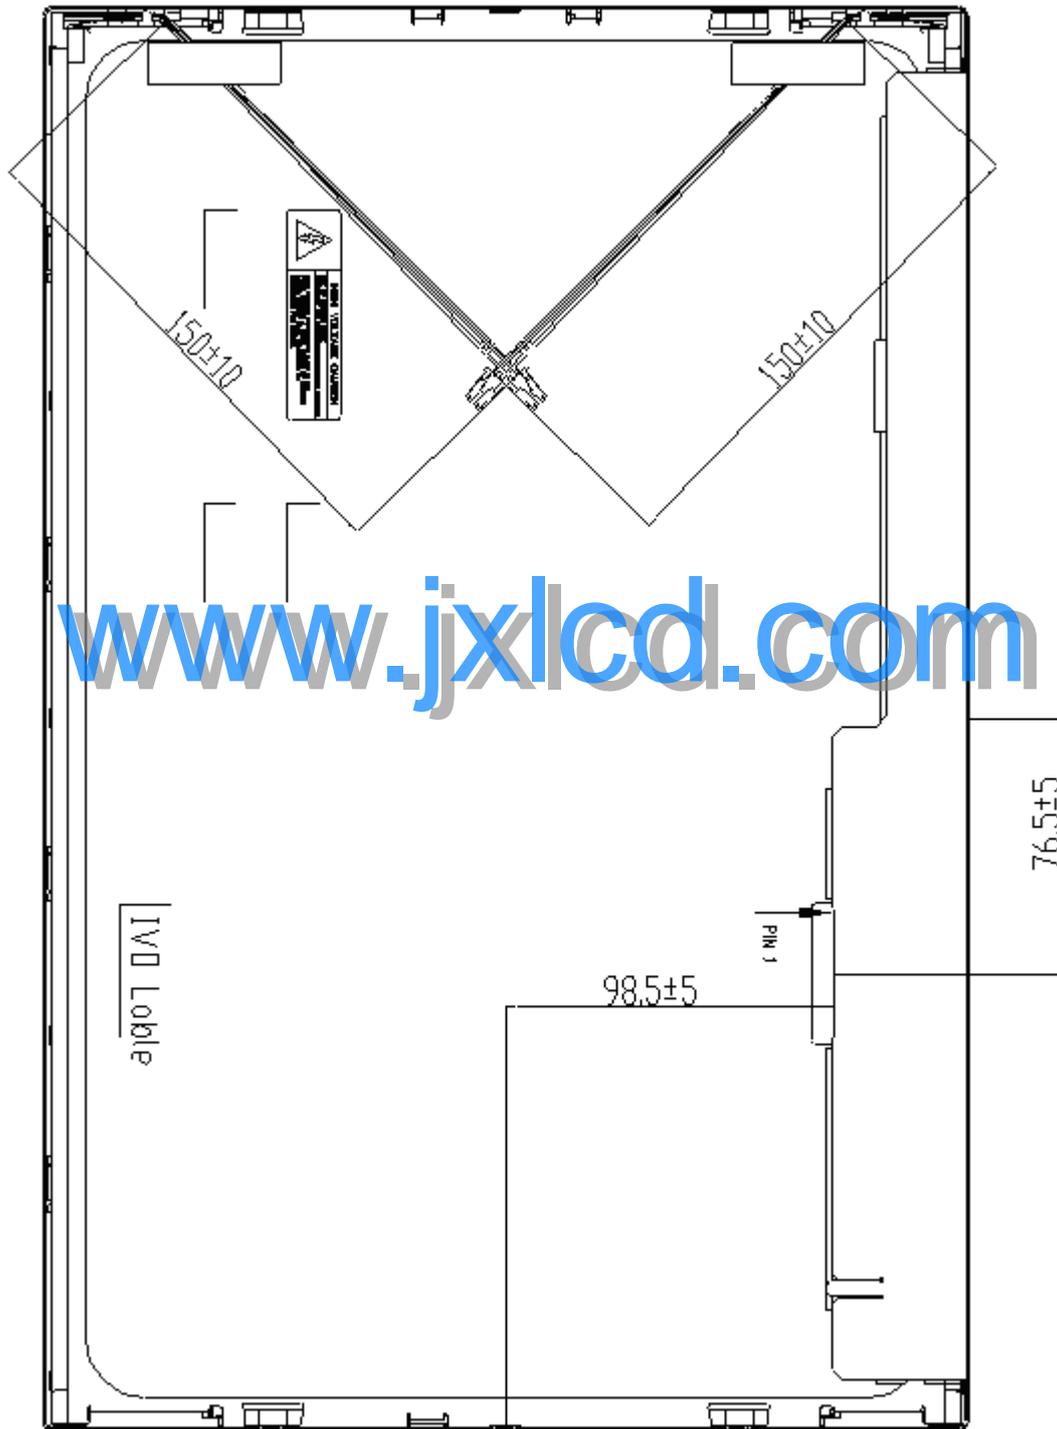




Document Title	M190MWW3 R3 Product Information		Page No.	26/30	
Document No.		Issue Date	2009/07/14	Revision	00

10.1 Dimension Specifications

Table 4


Width [mm]		428 ± 0.5
Height [mm]		278 ± 0.5
Thickness [mm]		Typical 15.5, Max 16.0
Bezel Opening [mm]	X	412.24 ± 0.3
	Y	259.15 ± 0.3
Mounting Hole [mm]	UR	49 ± 0.3
	LR	98 ± 0.3
	UL	49 ± 0.3
	LL	98 ± 0.3
Connector position from screen center [mm]	X	76.5 ± 5
	Y	98.5 ± 5
CCFL harness length [mm]		150 ± 10
Weight [g]		2250 max
BM : a-b & c-d		< 1.0mm

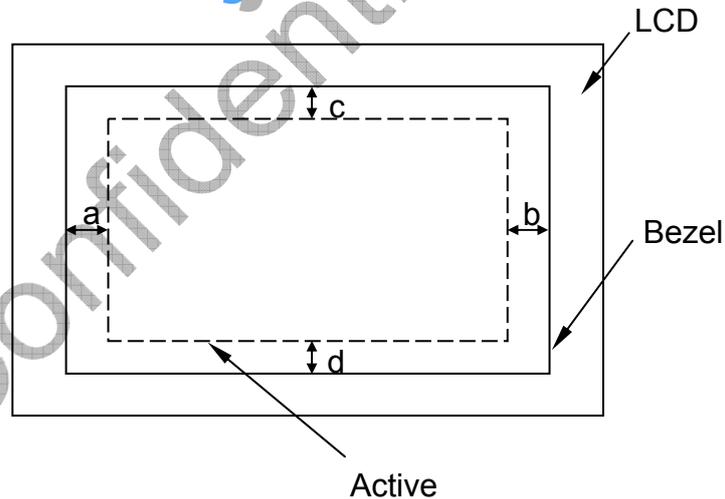





Document Title	M190MWW3 R3 Product Information		Page No.	27/30	
Document No.		Issue Date	2009/07/14	Revision	00

11.0 Package Specification

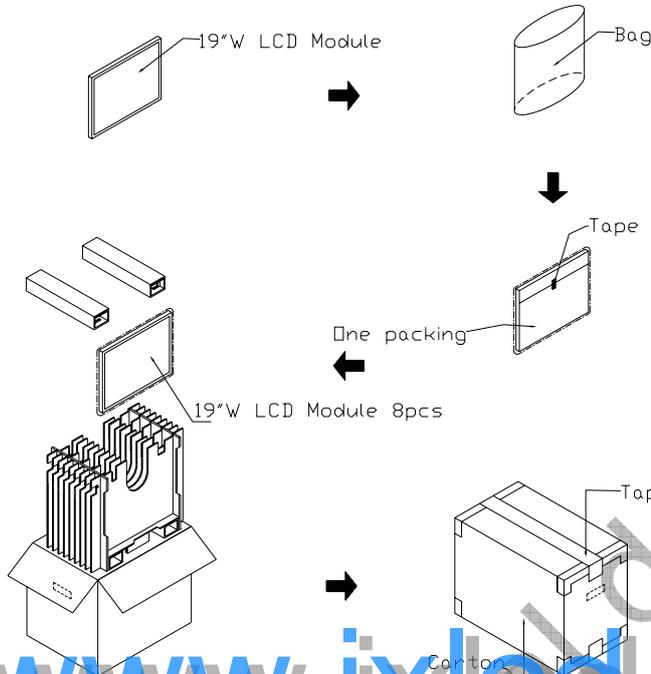

Air freight (144PCS)


Ocean shipping (192PCS)

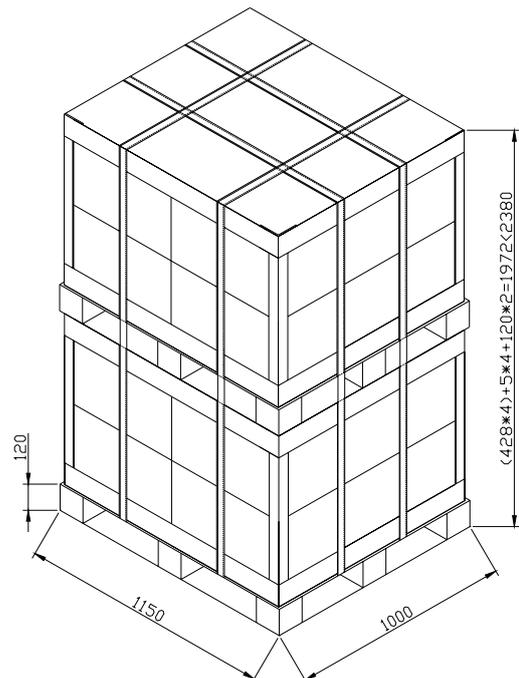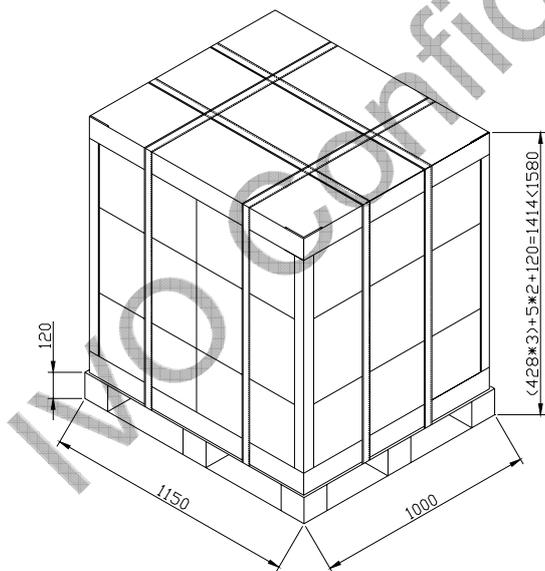



Document Title	M190MWW3 R3 Product Information			Page No.	28/30
Document No.		Issue Date	2009/07/14	Revision	00

12.0 Lot Mark

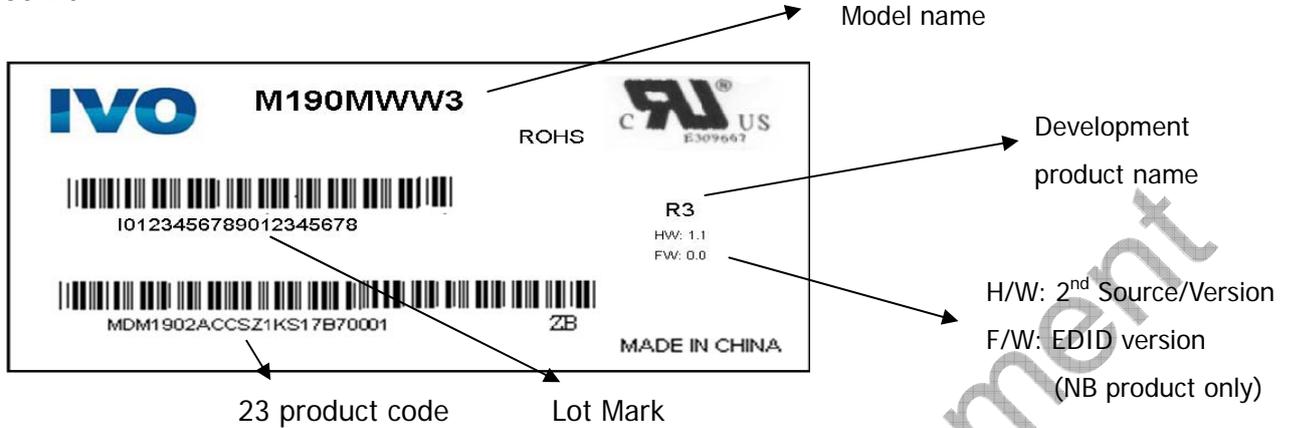

12.1 Lot Mark

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

code 1,2,4,5,6,7,8,9,10,11,16: IVO internal flow control code.
 code 3: production location.
 code 12: production year.
 code 13: production month.
 Code 16,17,18,19,20: serial number.

Note (1) Production Year

Year	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Mark	6	7	8	9	A	B	C	D	F	G

Note (2) Production Month

Month	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct	Nov.	Dec.
Mark	1	2	3	4	5	6	7	8	9	A	B	C

12.2 23 Product Barcode

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----

code 1,2: MD Mindtech Display.
 code 3,4,5,6,7: MTDIs internal module name.
 code 8,9,10,13,16: MTDIs internal flow control code.
 code 11,12: Cell location Suzhou defined as "SZ".
 code 14,15: Module line kunshan defined as "KS".
 code 17,18,19 : Year, Month, Day Refer to MTDIs barcode Note(1),Note(2).
 code 20~23 : Serial Number.



Document Title	M190MWW3 R3 Product Information			Page No.	29/30
Document No.		Issue Date	2009/07/14	Revision	00

13.0 General Precaution

13.1 Use Restriction

This product is not authorized for use in life supporting systems, aircraft navigation control systems, military systems and any other application where performance failure could be life-threatening or otherwise catastrophic.

13.2 Disassembling or Modification

Do not disassemble or modify the module. It may damage sensitive parts inside LCD module, and may cause scratches or dust on the display. MTD does not warrant the module, if customers disassemble or modify the module.

13.3 Breakage of LCD Panel

13.3.1 If LCD panel is broken and liquid crystal spills out, do not ingest or inhale liquid crystal, and do not contact liquid crystal with skin.

13.3.2 If liquid crystal contacts mouth or eyes, rinse out with water immediately.

13.3.3 If liquid crystal contacts skin or cloths, wash it off immediately with alcohol and rinse thoroughly with water.

13.3.4 Handle carefully with chips of glass that may cause injury, when the glass is broken

13.4 Electric Shock

13.4.1 Disconnect power supply before handling LCD module.

13.4.2 Do not pull or fold the CCFL cable.

13.4.3 Do not touch the parts inside LCD modules and the fluorescent lamp's connector Or cables in order to prevent electric shock

13.5 Absolute Maximum Ratings and Power Protection Circuit

13.5.1 Do not exceed the absolute maximum rating values, such as the supply voltage variation, input voltage variation, variation in parts' parameters, environmental temperature; etc otherwise LCD module may be damaged.

13.5.2 Please do not leave LCD module in the environment of high humidity and high temperature for a long time.

13.5.3 It's recommended employing protection circuit for power supply.

13.6 Operation

13.6.1 Do not touch, push or rub the polarizer with anything harder than HB pencil lead. Use fingerstalls of soft gloves in order to keep clean display quality, when persons handle the LCD module for incoming inspection or assembly.

13.6.2 When the surface is dusty, please wipe gently with absorbent cotton or other soft material

13.6.3 Wipe off saliva or water drops as soon as possible. If saliva or water drops contact with polarizer for a long time, they may causes deformation or color fading

13.6.4 When cleaning the adhesives, please use absorbent cotton wetted with a little petroleum benzene or other adequate solvent

13.7 Mechanism

Please mount LCD module by using mounting holes arranged in four corners tightly.

13.8 Static Electricity

13.8.1 Protection film must remove very slowly from the surface of LCD module to prevent from electrostatic occurrence.



Document Title	M190MWW3 R3 Product Information		Page No.	30/30	
Document No.		Issue Date	2009/07/14	Revision	00

13.8.2 Because LCD module uses CMOS-IC on circuit board and TFT-LCD panel, it is very weak to electrostatic discharge, Please be careful with electrostatic discharge

13.8.3 Persons who handle the module should be grounded through adequate methods.

13.9 Strong Light Exposure

The module shall not be exposed under strong light such as direct sunlight. Otherwise, display characteristics may be changed.

13.10 Disposal

When disposing LCD module, obey the local environmental regulations.

www.jxlcd.com