


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction ,majority carrier conduction
- For surface mount applications
- Low power loss ,high efficiency
- High current capability ,Low forward voltage drop
- Low profile package
- Built-in strain relief ,ideal for automated placement
- For use in low voltage ,high frequency inverters, free wheeling ,and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU



### SMC(DO-214AB)

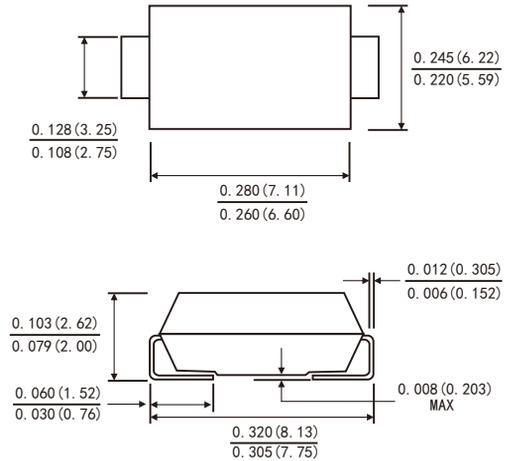

Dimensions in inches and (millimeters)

### MECHANICAL DATA

- Case: JEDEC SMC(DO-214AB) molded plastic body
- Terminals: solder plated ,solderable per MIL-STD-750,method 2026
- Polarity: color band denotes cathode end
- Weight: 0.007ounce,0.21 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified ,Single phase ,half wave ,resistive or inductive load. For capacitive load,derate by 20%.)

	Symbols	SS 52C	SS 53C	SS 54C	SS 56C	SS 510C	SS 515C	SS 520C	Units	
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	60	100	150	200	Volts	
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	42	71	105	140	Volts	
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	60	100	150	200	Volts	
Maximum average forward rectified current (see fig.1)	I <sub>(AV)</sub>	5.0							Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method at rated T <sub>J</sub> )	I <sub>FSM</sub>	150.0							Amps	
Maximum instantaneous forward voltage at 5.0 A(Note 1)	V <sub>F</sub>	0.55		0.70		0.85	0.90	0.95	Volts	
Maximum instantaneous reverse current at rated DC blocking voltage(Note 1)	T <sub>A</sub> =25°C	100				20				μA
	T <sub>A</sub> =100°C	5				-				mA
	T <sub>A</sub> =125°C	-				3				
Typical junction capacitance(Note 3)	C <sub>J</sub>	500				400				Pf
Typical thermal resistance (Note 2)	R <sub>θJA</sub> R <sub>θJL</sub>					55.0 17.0				°C/W
Operating junction temperature range	T <sub>J</sub>	-55 to+150							°C	
Storage temperature range	T <sub>STG</sub>	-55 to+150							°C	

Notes: 1. Pulse test: 300 μs pulse width,1% duty cycle

2. P.C.B. mounted 0.55X0.55"(14X14mm) copper pad areas

3. Measured at 1MHz and reverse voltage of 4.0 volts

# RATINGS AND CHARACTERISTIC CURVES SS52CTHRU SS520C

FIG.1-FORWARD CURRENT DERATING CURVE

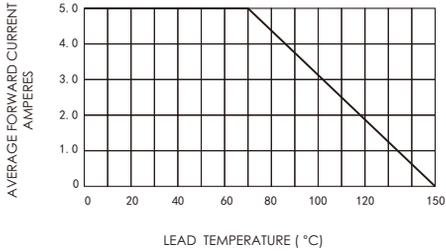


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

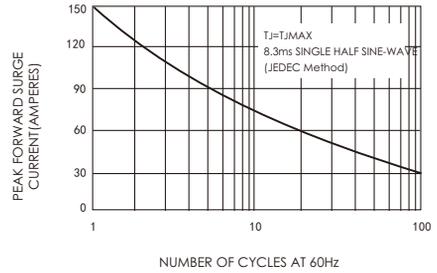


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

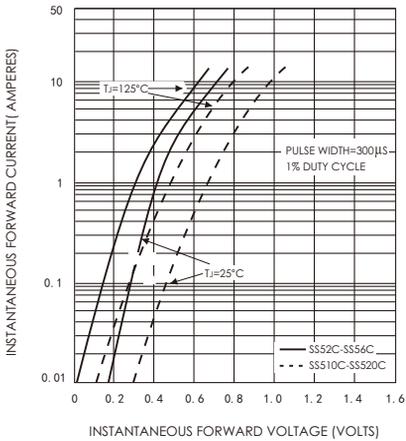


FIG.4-TYPICAL REVERSE CHARACTERISTICS

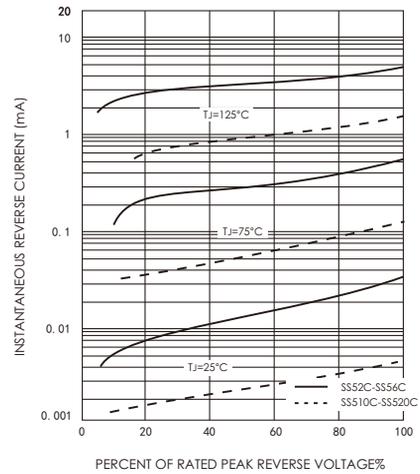


FIG.5-TYPICAL JUNCTION CAPACITANCE

