

Schottky Barrier Rectifiers

SS18F--SS110F

Features

- Metal silicon junction, majority carrier conduction
- High surge capability
- High temperature soldering guaranteed:
260°C/10 seconds
- High current capability, low forward voltage drop
- RoHS Compliant



Mechanical Data

- Case: SMAF molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	SS18F	SS19F	SS110F	Units
Peak repetitive reverse voltage	V _R RM	80	90	100	V
RMS reverse voltage	V _R MS	56	63	70	V
DC blocking voltage	V _D C	80	90	100	V
Maximum average forward output current	I _{F(AV)}	1.0			A
Peak forward surge current, 8.3ms single half-sine-wave	I _F SM	35			A

Thermal Characteristics

Parameter	Symbol	SS18F	SS19F	SS110F	Units
Typical thermal resistance (Note 1)	R _θ JA	78			°C/W
	R _θ JC	18			
	R _θ JL	20			
Operating junction temperature range	T _J	- 55 ---- + 150			°C
Storage temperature range	T _{STG}	- 55 ---- + 150			°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Schottky Barrier Rectifiers**SS18F--SS110F****Electrical Characteristics** (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage(Note 1)	V_F	$I_F=1.0\text{A}$	@ $T_A=25^\circ\text{C}$	--	0.85	V
Maximum Reverse current (Note 2)	I_R	Rated V_R	@ $T_J=25^\circ\text{C}$	--	250	μA
			@ $T_J=100^\circ\text{C}$	--	10	m A

Note:

- 1.Pulse test: 300us pulse width, 1 % duty cycle
- 2.Pulse test: Pulse width 40ms

Schottky Barrier Rectifiers

SS18F--SS110F

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

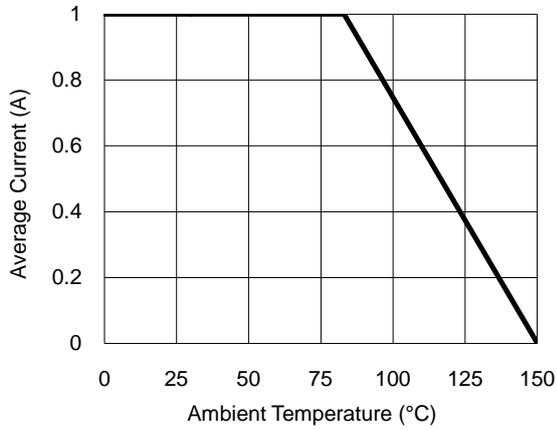


Fig.2- Surge Current Derating Curve

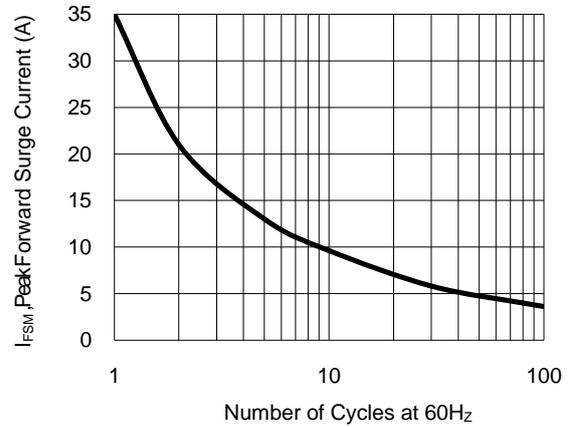


Fig.3- Typical Forward Voltage Characteristic


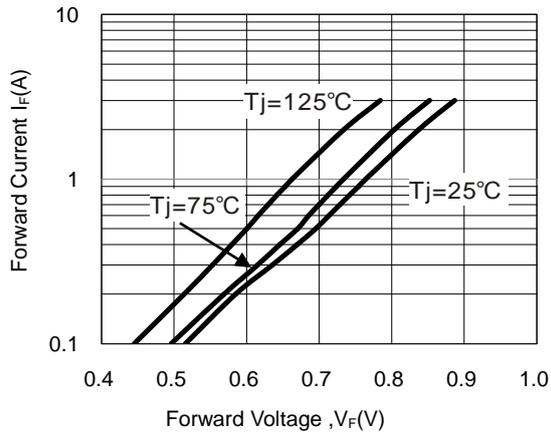



Fig.4- Typical Reverse Characteristic

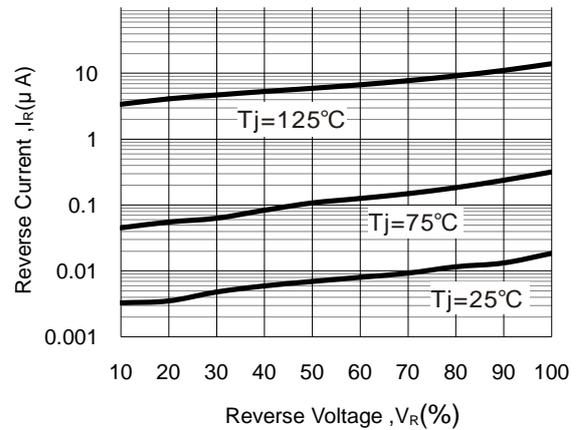


Schottky Barrier Rectifiers

SS18F--SS110F

Package Outline Dimensions(unit:mm)

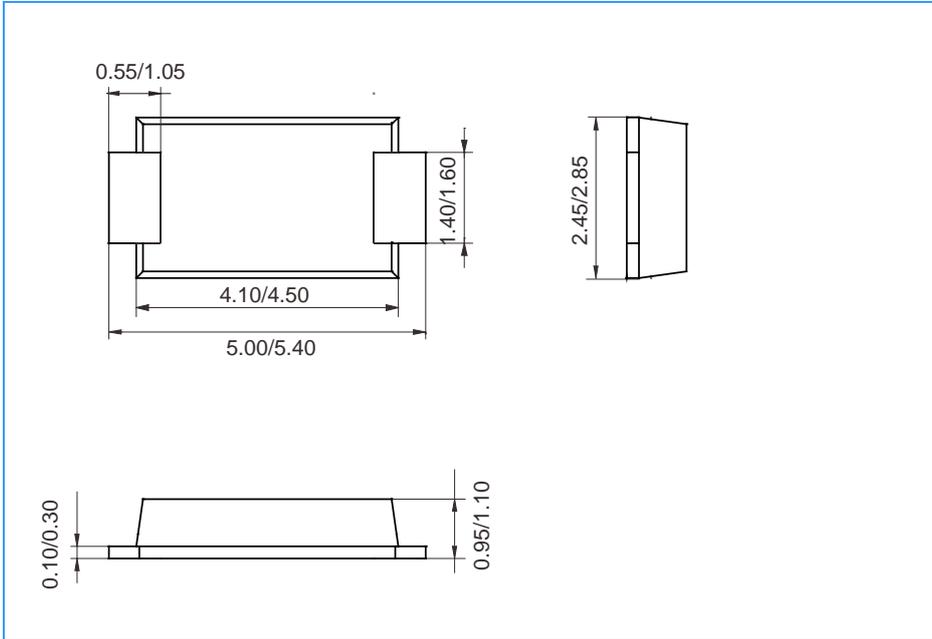

Mounting Pad Layout(unit:mm)

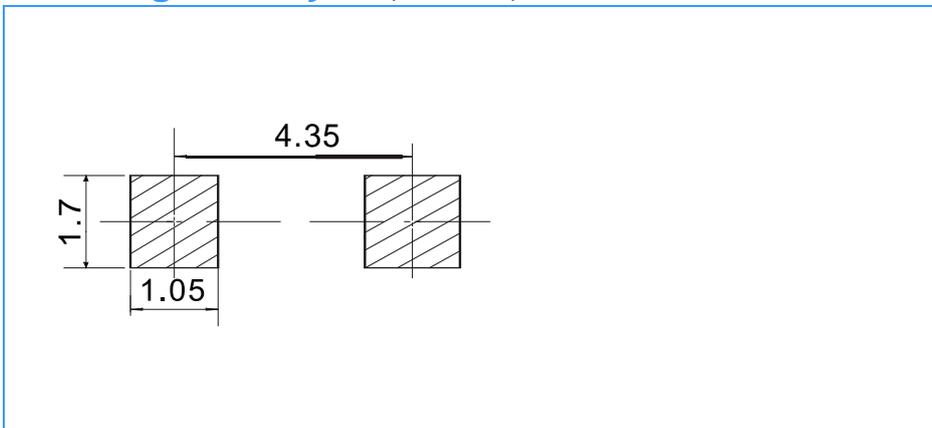

Ordering Information

Part No.	Marking	Package	Shipping
SS18F	SS18F	SMAF	10000/Tape&Reel
SS19F	SS19F	SMAF	10000/Tape&Reel
SS110F	SS110F	SMAF	10000/Tape&Reel